



TECE



FINISHED SOONER THANKS TO PREFABRICATION

TECEprofil module – for installing a washstand and an instantaneous water heater.
Pre-assembled, piped, pre-insulated.

Sanitary systems

close to you

EVERYTHING IN ITS PLACE – READY, SET, GO!

The latest trend in construction: industrial prefabrication delivers top quality straight from the factory and eliminates the need for many small-scale installation processes on-site. Just like the new TECEprofil module for washstands with instantaneous water heater.



All set to connect

The cold-water connection and the hot- and cold-water outlets are already set up for easy connection to the piping system.


Sound-insulated crossbeam

The crossbeam, which is sound-insulated at the factory, eliminates the need for on-site sound insulation. Another work step saved.


Instantaneous water heater: effortlessly installed!

The wooden panel for mounting the instantaneous water heater is also pre-installed in this module. Simply tighten the screws in the right position and you are done.

Strain relief for power supply

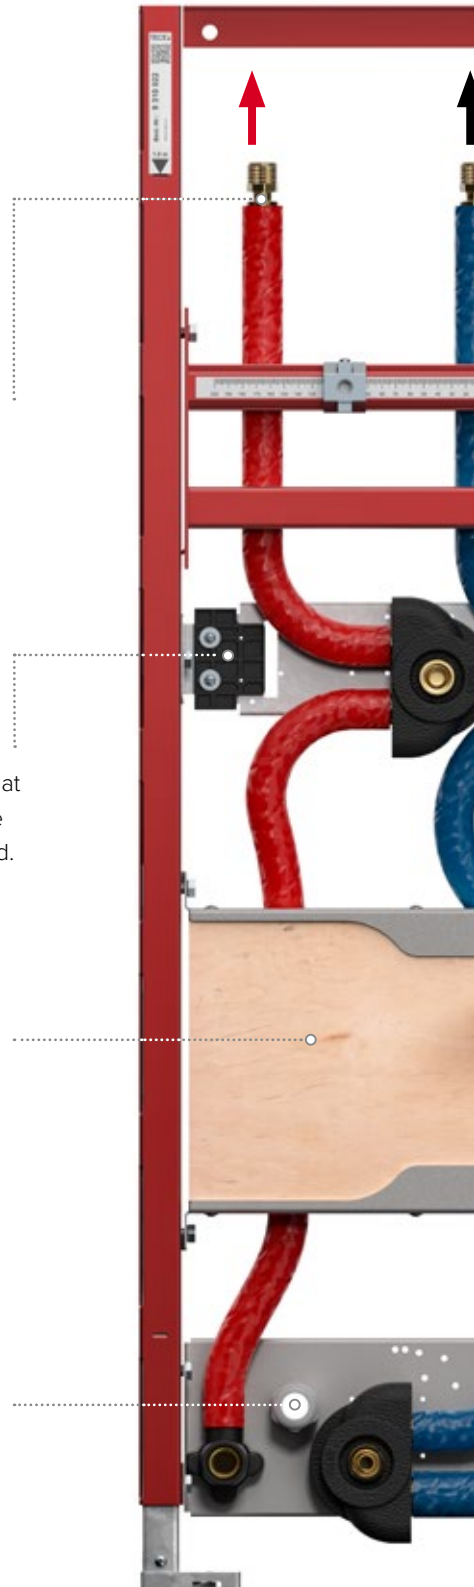

» One compact unit instead of many small parts: when everything for the washstand and instantaneous water heater is already pre-planned and pre-installed, the unit is up on the wall in no time. «

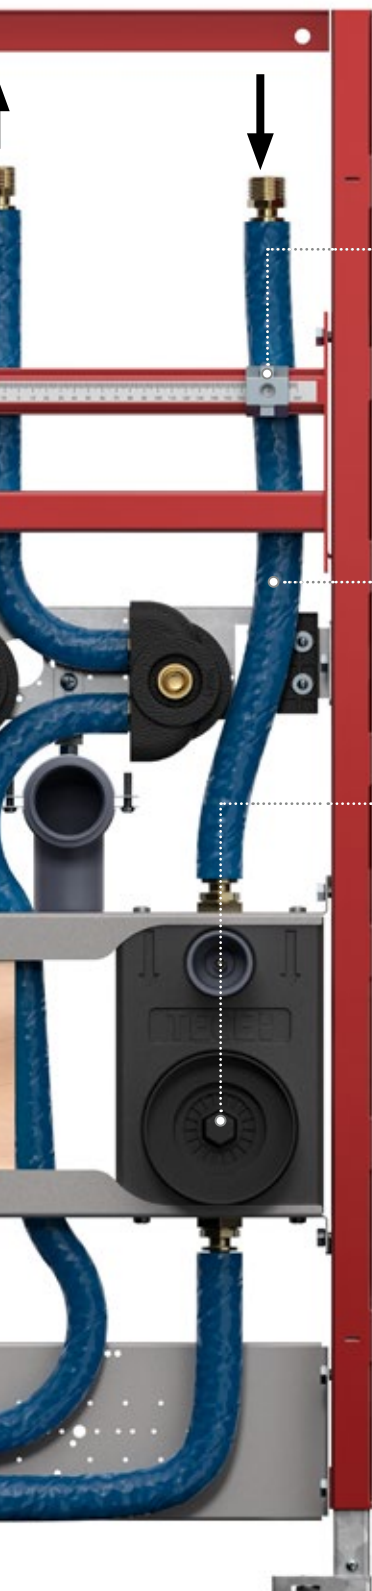

Asymmetrical washstand attachment

No clashes, no compromises: for easy asymmetrical attachment of washstand and instantaneous water heater, the attachments for the washstand are already positioned correctly at the factory.

Well protected

All connections and piping are both pre-assembled and pre-insulated in the TECEprofil washstand module.

Meter and shut-off unit

The mounting block, complete with shut-off valve and water meter housing, is already pre-assembled and piped within the mounting frame.

Product highlights

- Compact, fully pre-assembled, piped and pre-insulated assembly
- Quick and secure connection of washstand and instantaneous water heater
- Compatible with many commercially available instantaneous water heaters
- For installation in the TECEprofil system, in metal or wooden stud walls, or free-standing in front of the wall.
- Neutral connection option via cold water inlet 3/4" outer thread and cold and hot water outlets 1/2" outer thread.

EVEN MORE PREFABRICATION

Planning in the office, prefabrication in the workshop.

Discover TECEsmartwall! The free, always up-to-date planning tool for your TECEprofil pre-wall.



Click here or scan
for more information
about TECEsmartwall.



Industrial prefabrication of installation walls

TECESystem: The solution for large projects.
Fast, safe, reliable and tested.



Click here or scan
for more information
about TECESystem.

Illustration	Product	Item no.
	TECEprofil washstand module prepared for connection of instantaneous water heaters, incl. an insulated and lockable mounting block for water meters, installation height 1120 mm	9310022
	TECEprofil washstand module for asymmetrical installation for instantaneous water heater and washstand, installation height 1120 mm	9310024
	TECEprofil washstand module incl. two insulated and lockable mounting blocks, suitable for accommodating water meter measuring capsules with coax G 2", installation height 1120 mm	9310025
	TECEprofil washstand module incl. an insulated and lockable mounting block, suitable for accommodating a water meter measuring capsule with coaxial G 2", installation height 1120 mm	9310026

For more information visit
www.tece.com

TECE SE

International Business

T +49 2572 928-999

international-business@tece.de

www.tece.com/en

TECE Limited

T +44 17 61 24 11 33

info@tece.co.uk

www.tece.co.uk

Appearance and texture may vary depending on material, manufacturing process and lighting conditions.

In order to improve the flow of reading, no distinction is made between feminine, masculine and non-binary in gender-related expressions. However, all genders are always implied.