

PRODUCT RANGE 2025

Pipe Systems

TECE International

Austria

TECE Österreich GmbH
Betriebsring 27
AT - 2483 Ebreichsdorf
Phone: +43 2254 207 02
info@tece.at
www.tece.at

Belarus

IOOO «TECE»
Menkovsky Trakt 10, Office 408-411
BY - Minsk
Republic Belarus
Phone: +375 17 507 51 90
info@tece.by
www.tece.by

Belgium

TECE Belgium BVBA
Jules Moretuslei 187-189,
BE - 2610 Antwerpen - Wilrijk
Phone: +32 2 401 61 37
info@tece.be
www.tece.be

China

**TECE Sanitary & Building Material
(Shanghai) Co., Ltd.**
No.3037, Kaixuan Road,
Xuhui District
CN - 200030 Shanghai, China
Phone: +86 21 32555030
info@tece.cn
www.tece.cn

Croatia

TECE d.o.o.
Fallerovo šetalište 16
HR - 10000 Zagreb
Phone: +38 513 079 000
info@tece.hr
www.tece.hr

Czech Republic

TECE Česká republika s.r.o.
Vocáňova 2449/5
CZ - 180 00 Praha 8 - Libeň
Phone: +420 273 134 240
info@tece.cz
www.tece.cz

Estonia

UAB TECE BALTIKUM Eesti filiaal
Tuleviku tee 10
EE - 75312 Peetri alevik
Rae vald, Harjumaa
Phone: +372 6 781100
info@tece.ee
www.tece.ee

France

TECE France Sarl
185, rue Louise Labbé, Bat C
FR - 69970 Chaponnay
Phone: +33 437 453 810
info@tece.fr
www.tece.fr

Germany

TECE GmbH
Hollefeldstr. 57
DE - 48282 Emsdetten
Phone: +49 2572 928 0
info@tece.de
www.tece.de

India

TECE India Private Ltd.
G-3, Neel Madhav,
Nr. Navneet Hospital,
V.P. cross road, Mulund (west)
IN - 400080 Mumbai Maharastra
Phone +91 22 2167 6767
info@tece.in
www.tece.in

Italy

TECE Italia srl. a socio unico
Via dell'Industria, 24 A
IT - 41051 Castelnovo Rangone (MO)
Phone: +39 0 595 334 011
info@teceitalia.com
www.tece.it

Latvia

UAB TECE Baltikum Latvia
Dēļu iela 4, Rīga
LV - 1004 Latvija
Phone: +371 67 21 18 02
info@tece.lv
www.tece.lv

Lithuania

UAB TECE Baltikum
Islandijos pl. 217-2 Kaunas
LT - 49165 Lietuva
Phone: +370 37 314 078
info@tece.lt
www.tece.lt

Netherlands

TECE Nederland B.V.
W.A. Scholtenweg 7 a
NL - 9422 BR Smilde
Phone: +31 592 415 074
info@tece.nl
www.tece.nl

Norway

TECE NORGE A/S
Snipetjernveien 4
NO - 1405 Langhus
Phone: +47 915 03 654
ordre@tece.no
www.tece.no

Poland

TECE Sp. z o.o.
Ul. Wrocławska 61
PL - 57-100 Strzelin
Phone: +48 713 839 100
tece@tece.pl
www.tece.pl

Romania

TECE GmbH Romania SRL
Soseaua de Centura, 13A, com. Chiajna
RO - 077040 jud. Ilfov
Phone: +40 21 316 47 08
info@tece.ro
www.tece.ro

Russia

OOO TECE Systems
Highway „Baltija“ 26 km, BC «Riga Land»,
Building 6, Entrance 5, floor 5
Moscow Region,
Krasnogorsky District - Ilyinskoye
RU - 143421 Moscow
Phone +8 800 333 83 23
info@tece.ru
www.tece.ru

Singapore

TECE South-East Asia Pte. Ltd.
76 Playfair Road
LHK2 Building, #03-03 Lobby 2
SG - 367996 Singapore
Phone: +65 67 43 48 86
sales@tece.com.sg
www.tece.com.sg

Spain

TECE Haustechnik, S.L.
Parque Empresarial Alvedro
Calle F 24, Manzana 10
ES - 15180 Culleredo, A Coruña
Phone: +34 881 89 50 25
info@tece.es
www.tece.es

Sweden

TECE Sverige AB
Askims Verkstadsväg 7
SE - 43634 Askim
Phone: +46 10 200 81 40
info@tece.se
www.tece.se

Switzerland

TECE Schweiz AG
Gewerbstrasse 8
CH - 8212 Neuhausen am Rheinfall
Phone: +41 52 672 62 20
info@tece.ch
www.tece.ch

Ukraine

TOV TECE Ukraine
Williamsa Akademika str. 3/7, of.7
UA - 03195 Kyiv
Phone: +38 044 596 59 46
info@tece.ua
www.tece.ua

United Kingdom

TECE Ltd.
Wirral Park Road
Glastonbury, Somerset
UK - BA6 9XE Somerset
Phone +44 844 335 0811
info@tece.co.uk
www.tece.co.uk

	Page
Pipe Systems	
TECEflex – The universal pipe system with push sleeves	5
TECElogo – The quick push-fitting system for multi-layer composite pipes	77
TECEfloor – The complete range for radiant heating	129
Annex	
Article quick search	177
Assortment changes	189

General Conditions of Sale and Delivery and General Contractual Conditions of the Company TECE GmbH, Hollefeldstr. 57, 48282 Emsdetten/Germany

1. Applicability of the Conditions

- 1.1 The deliveries, services and offers of TECE GmbH, Hollefeldstr. 57, 48282 Emsdetten, hereinafter briefly referred to as TECE, shall be based exclusively on these terms and conditions. The latter shall therefore also apply to all future business relationships even if not explicitly agreed upon once again. At the latest on receipt of the goods/services, these conditions shall be deemed accepted. Any acknowledgements of the purchaser with reference to his own conditions of business or purchase are hereby objected to.
- 1.2 Deviations from these terms and conditions shall only be effective if explicitly confirmed in writing by TECE.
- 1.3 The following general terms and conditions of sale and delivery apply to our business relationships with our customers. Customers in the sense of these terms and conditions can be both consumers and entrepreneurs. The customer is a consumer, insofar as the purpose of the ordered deliveries and services is not predominantly commercial or independent professional activity can be attributed. In contrast, an entrepreneur is any natural or legal person or person with legal capacity partnership that, when concluding the contract, is exercising its commercial or independent professional activity acts including legal entities under public law and special funds under public law within the meaning of Section 310 (1) BGB.

2. Offer and Contract Conclusion

- 2.1 Where the order is to be qualified as an offer pursuant to § 145 BGB, TECE shall be entitled to accept this offer within 4 weeks.
- 2.2 TECE reserves proprietary rights and copyrights with respect to images, drawings, calculations, data and other documents. These must not be made accessible to third parties. This shall also apply to information, especially written documents, which is marked as confidential. Prior to passing on such information to third parties, the purchaser shall require explicit written consent from TECE.
- 2.3 Drawings, images, measures, weights and other performance data shall only be binding if that has been explicitly agreed in writing. Such information shall not be understood as a guarantee of quality.

3. Application-technological Advice

- 3.1 Application-technological advice such as installation instructions, standard operating procedures and the creation and calculation of measurements etc. will be provided by TECE to the best of its knowledge. Any data and information regarding the suitability and use of TECE goods shall not exempt the customer from his obligation to carry out own inspections and tests as to whether the products are suitable for the intended processes and purposes; such information shall be non-binding and, as a matter of principle, not give rise to any contractual legal relationship and any ancillary obligations under the delivery contract, unless explicitly agreed otherwise in writing. To such exceptional cases, the following subsections 3.2 and 3.3 shall apply.
- 3.2 For application-technological advice, TECE shall only be liable in cases of wilful misconduct and gross negligence. This shall apply without restrictions to advisory activities relating to the application/use of new product developments. In other cases, TECE shall also be liable for simple negligence, albeit only where essential contractual obligations are infringed. Any liability for lost profits, for damage/loss resulting from third-party claims against the customer and for other consequential damage shall be ruled out.
- 3.3 Unless TECE is charged with a wilful breach of contract, the liability for damages shall be limited, apart from that, to the foreseeable, typically occurring damage.

4. Period of Delivery and Performance, Delay

- 4.1 The delivery period indicated by TECE shall only begin to run once all technical matters/issues have been clarified.
- 4.2 The dates and periods mentioned by TECE shall be non-binding unless explicitly agreed otherwise in writing. As a matter of principle, risks of procurement will not be assumed by TECE.
- 4.3 Delays of delivery and performance due to force majeure and/or because of events, which make the delivery essentially more difficult or impossible for TECE (such as strike, lockout etc.), shall entitle TECE to postpone the deliveries or services by the duration of the hindrance plus an appropriate preparatory period. The same shall apply correspondingly if the aforementioned hindrances have occurred at suppliers of TECE or their sub-suppliers.
- 4.4 Correct and timely self-supply shall remain reserved.
- 4.5 Where TECE has failed to provide a due service in accordance with the contract, the purchaser shall not be entitled to withdraw from the contract and/or demand compensation for damages instead of the entire performance or the reimbursement of futile expenses as far as TECE's breach of duty is insignificant.
- 4.6 TECE shall come in default only as a consequence of a reminder unless something else results from the law or the contract. To become effective, reminders submitted and deadlines set by the purchaser shall require written form.
- 4.7 Compliance with delivery obligations on the part of TECE shall require timely and proper performance of the purchaser's obligations. The defence of non-performance of the contract shall remain reserved. TECE shall be entitled to partial delivery and partial performance at any time.
- 4.8 As far as TECE fails to provide a due service or fails to provide such a service in line with what is owed, the purchaser shall be entitled to withdraw from the contract and, subject to the culpable infringement of a contractual obligation on the part of TECE, to demand compensation for damages instead of performance or the reimbursement of futile expenses without prejudice to the additional prerequisites under the following subsections. Another prerequisite shall be that the purchaser has set an appropriate period of time for performance or subsequent performance and that this period of time has expired unsuccessfully.
- 4.9 The purchaser shall be under obligation to link the period of grace pursuant to Subsection 4.8 above with the explicit statement that, after unsuccessful expiry of the period of grace, he will reject delivery and assert the rights arising against TECE from Subsection 4.8 above.
- 4.10 Where performance has already been provided partially, the purchaser shall only be entitled to demand compensation for damages instead of the entire performance as far as his interest in the entire performance requires so. Withdrawal from the entire contract shall only be possible in this event as far as the purchaser is able to prove that he has no interest in any partial performance.
- 4.11 Where TECE comes in default because of reasons, for which TECE is responsible, the liability for damages shall be ruled out in cases of ordinary negligence. The aforementioned limitation of liability shall not apply if the delay results from TECE's culpable infringement of an essential contractual obligation. In this event, the liability of TECE shall be limited, pursuant to Subsection 4.13 below, to the foreseeable damage typical of this kind of contract. In the event of any wilful infringement of the contract, for which TECE is responsible, TECE shall be liable according to the statutory provisions. More far-reaching compensation claims of the purchaser shall be ruled out in all cases of delayed delivery including after expiry of a period of grace possibly set to TECE. This shall not apply as far as compulsory liability is in place because of wilful misconduct, gross negligence and bodily injury; this shall not be associated with any change of the burden of proof to the disadvantage of the purchaser.
- 4.12 In the event of delayed acceptance by the purchaser or in the event of infringement of other obligations to cooperate by the purchaser, TECE shall have the right to assert the legal claims, to which TECE is entitled. The risk of accidental loss and/or accidental deterioration of the object of purchase shall be transferred to the purchaser no later than at the point in time, at which the purchaser comes in default of acceptance.
- 4.13 Where TECE comes in default, the purchaser shall be entitled – if he provides conclusive evidence that he has suffered damage as a result of such default – to demand compensation of 0.5 % at the most for each full week of delay in case of simple negligence without prejudice to the limitation of liability under Subsection 4.11 above. Overall, however, he shall not be entitled to demand more than 10 % of the price for that part of the delivery which the purchaser could not put into useful operation because of the delay.

5. Transfer of Risk, Packaging

- 5.1 Unless otherwise agreed, delivery ex stock from TECE in Emsdetten shall be agreed. The risk will be transferred to the purchaser as soon as the shipment has been handed over to the person executing transportation or has left the TECE warehouse for shipping purposes. This shall also apply if TECE carries out the transportation by means of own personnel.
- 5.2 If shipping becomes impossible through no fault of TECE, the risk will be transferred to the purchaser as soon as the delivery is reported as ready for shipment.
- 5.3 If the purchaser wishes, TECE will cover the delivery through goods in transit insurance. The costs incurred in this respect shall be borne by the purchaser.
- 5.4 The transport packaging and any other packaging pursuant to the German Packaging Regulation shall not be taken back, except for repeatedly usable means of transport such as pallets, lattice boxes, pressure cylinders etc. The purchaser shall be under obligation to arrange for the disposal of non-returnable packaging at his own expense. The repeatedly usable means of transport will be made available to the purchaser only by way of lending. The purchaser shall be under obligation to return them in proper condition, i.e. completely emptied and without damage. In case of contamination or damage of the means of transport, the purchaser shall bear the cost of repair or provide TECE with compensation for lost value if repair is impossible.

6. Prices and Payments

- 6.1 The prices indicated in the respective current price lists of TECE plus the respectively applicable statutory value-added tax shall be relevant. Additional deliveries and services shall be invoiced separately.
- 6.2 Unless otherwise agreed, the prices shall be prices ex stock of TECE in Emsdetten including normal packaging.
- 6.3 Unless explicitly agreed otherwise, the amount invoiced shall be due without any deductions 30 days after the date of issue of the invoice.
- 6.4 Where the purchaser comes in default of payment, TECE shall be entitled to assert the rights arising under § 288 BGB (German Civil Code).
- 6.5 The purchaser shall only be entitled to rights of setoff if his counterclaims have been finally established, are undisputed or have been acknowledged by TECE. Moreover, he shall only be entitled to exercise a right of retention insofar as his counterclaim is based on the same contractual relationship.
- 6.6 Where TECE is aware of circumstances calling the purchaser's creditworthiness into question, TECE shall be entitled to demand advance payments or security deposits without prejudice to more far-reaching legal claims.
- 6.7 Cheques and bills of exchange, in respect of which TECE reserves acceptance, shall only be considered as payment following redemption. Possible discount and bank charges shall be at the expense of the purchaser.
- 6.8 The goods shall be delivered in accordance with these terms and conditions subject to the reservation of proprietary rights. As far as TECE agrees with the purchaser on payment of the purchase price debt via the cheque/bill of exchange procedure, the reservation of proprietary rights shall also extend to the purchaser's redemption of the bill of exchange accepted by TECE and not expire through credit entry of the received bill of exchange.

7. Warranty

- 7.1 The warranty rights of the purchaser shall require that the purchaser has properly met his obligations to perform an inspection and raise a complaint as owed under § 377 HGB (German Commercial Code).
- 7.2 The legal rights of recourse of the purchaser against TECE shall only be in place insofar as the purchaser has not reached any agreement with his customer that goes beyond the legal rights to claim damages for defects.
- 7.3.1 As far as the object of purchase shows a defect, for which TECE is responsible, TECE shall first be given the opportunity for subsequent performance within appropriate periods of time. TECE shall be entitled, at its own choice, to remedy the defects or make replacement delivery.
- 7.3.2 If subsequent performance fails, the purchaser shall be entitled – without prejudice to possible claims for damages – to withdraw from the contract or reduce the purchase price. Claims of the purchaser regarding the expenses required for subsequent performance, especially transportation costs, infrastructure costs, labour costs and costs of materials, shall be ruled out insofar as such expenses increase because the object of delivery was subsequently taken to a place other than the place of performance, unless taking the object there is part of its intended use.
- 7.4.1 Claims for damages because of defects shall not be in place in case of only insignificant deviations from the agreed quality, in case of an only insignificant impairment of usability, in the event of natural wear and tear and/or in case of damage having occurred after the transfer of risk due to inaccurate or negligent handling, excessive exposure, unsuitable operating devices and/or which arise because of particular external influences and/or are not stipulated in the contract.
- 7.4.2 If the operation and/or maintenance instructions given by TECE are not adhered to, inadmissible changes are made to the products, parts are exchanged and/or consumable materials are used, which do not comply with the original specifications, the liability of TECE for material defects shall cease to apply, unless the warranty case is verifiably not attributable to one of the aforementioned reasons for exclusion.
- 7.5 Claims because of material defects shall come under the statute of limitations in 12 months. This period shall begin running upon the transfer of risk. The aforementioned provisions shall not apply if the law stipulates longer periods pursuant to BGB §§ 438 Subsection 1 no. 2 (objects for buildings), 479 Subsection 1 (Right of Recourse) and 634 a (Constructional Defects).
- 7.6.1 Unless otherwise agreed hereafter, more far-reaching claims of the purchaser – on whatever legal grounds – shall be ruled out. Therefore, TECE shall not be liable for damage not having been caused to the delivery item itself; in particular, TECE shall not be liable for lost profits or other financial damage suffered by the purchaser.
- 7.6.2 If TECE infringes a cardinal obligation or essential contractual obligation through negligence, the liability to pay damages of TECE shall be limited to the sum insured of the product liability insurance, amounting to EUR 1.5 million. As far as the insurance does not provide cover, TECE shall be under obligation to provide compensation itself. On request, TECE is ready to let the purchaser inspect this policy. TECE undertakes to maintain the insurance until expiry of the warranty obligation subject to these conditions.
- 7.6.3 The aforementioned exclusions of liability shall not apply if the damage is attributable to wilful misconduct or gross negligence. Moreover, they shall not apply either to cases of bodily injury and/or damage to health and to cases, in which the purchaser asserts claims for damages due to a guarantee having been assumed for the existence of a certain quality/property, unless the purpose of the quality/property guarantee only extends to compliance of the underlying delivery with the provisions of the contract, but not to the risk of consequential damage caused by a defect. The aforementioned regulations are not associated with any change of the burden of proof to the disadvantage of the purchaser.
- 7.7 Payments made by TECE without explicit reason are a gesture of goodwill.

8. Joint and Several Liability

- 8.1 Any liability for damages going beyond what is stated in Section 7 shall be ruled out – without respect of the legal nature of the asserted claim – especially as far as the infringement of obligations under a non-contractual relationship and through an impermissible act is concerned.
- 8.2 The exclusion of liability pursuant to Subsection 8.1 above shall not apply to claims under the German Product Liability Act and in cases of damage to life, body or health.
- 8.3 As far as TECE's liability is ruled out or restricted, this shall also apply to the personal liability of employees, staff members, personnel, representatives and auxiliary persons of TECE.
- 8.4 The customer expressly warrants that he/she is entitled to publish and duplicate the texts and motifs. In particular, the customer hereby gives assurance that he/she will uphold all data-protection and privacy rights of all parties concerned. The customer shall not transmit any data whose content infringes any third-party rights (in particular those relating to competition or copyright law), or which violates existing laws or good morals. The customer hereby assumes full liability and exempts TECE from all third-party claims, in particular those relating to competition or copyright law. If claims are asserted against TECE, TECE shall also be indemnified against the legal costs necessary for its legal defence.

9. Reservation of Proprietary Rights

- 9.1 The goods delivered shall remain property of TECE until complete payment of all accounts receivable relating to the business relationship between TECE and the purchaser has been made. The inclusion of individual accounts receivable in a current invoice and the acknowledgement of the respective account balance shall not affect the reservation of proprietary rights. Only receipt of the equivalent amount by TECE shall be considered as payment.
- 9.2 If the purchaser acts in a manner contrary to contract, especially in the event of delayed payment, TECE shall be entitled to take back the object of purchase. The fact that TECE takes back the object of purchase shall not constitute withdrawal from the contract unless this is stated explicitly and in writing by TECE.
- 9.3 A seizure of the object of purchase by TECE shall always constitute withdrawal from the contract. After TECE has taken back the object of purchase, TECE shall be entitled to its commercialisation. The proceeds of commercialisation less reasonable costs of commercialisation shall be set off against the purchaser's account payable.
- 9.4 The purchaser shall be under obligation to handle the object of purchase with care. In particular, he shall be under obligation to sufficiently insure the object of purchase, according to its replacement value and at his own expense, against damage caused by fire, water and theft. Where maintenance and inspection works are required, the purchaser will have to carry out these works in due time at his own expense.
- 9.5 In the event of seizure or any other intervention by third parties, TECE shall be notified in writing without delay, so that TECE will be able to bring legal action pursuant to § 771 ZPO (Code of Civil Procedure). As far as the third party is unable to reimburse the judicial and extrajudicial costs of a lawsuit pursuant to § 771 ZPO to TECE, the purchaser shall be liable for the resulting loss.
- 9.6 The purchaser shall be entitled to resell the goods being subject to the reservation of proprietary rights in the framework of his regular course of business. However, he already now cedes to TECE all accounts receivable, which he acquires against his customers or third parties as a result of the resale, up to the final invoice amount (including value-added tax) of the accounts receivable, to which TECE is entitled. The cession shall be made regardless of whether the object of purchase has been resold without processing or after processing. TECE accepts the cession. If the ceded receivable against the acquirer of the goods being subject to the reservation of proprietary rights has been included in a current invoice (current account), the cession shall also refer to the acknowledged account balance and, in case of the respective customer's insolvency, to the "causal account balance" being in place in this event. In spite of the cession, the purchaser shall be entitled to collect this receivable. The authority of TECE to collect the receivable itself shall remain unaffected. However, TECE undertakes not to collect the receivable as long as the purchaser meets his payment obligations relating to the collected proceeds, as long as he is not in default of payment and, in particular, as long as no application for the opening of insolvency proceedings has been filed or no cessation of payments has occurred. Where this is the case, however, TECE shall be entitled to demand from the purchaser to notify TECE of the ceded accounts receivable and their respective debtors, provide any information necessary for collection, hand over the related documents and notify the debtors (third parties) of the cession.

- 9.7 Processing or alteration of the goods subject to the reservation of proprietary rights by the purchaser shall always be done on behalf of TECE. If the goods subject to the reservation of proprietary rights are processed together with other objects not belonging to TECE, TECE shall acquire co-ownership of the new object in accordance with the proportion between the value of the goods subject to the reservation of proprietary rights (final invoice amount including VAT) and the value of the other processed objects at the time of processing. Apart from that, the same regulations shall apply to the object having resulted from such processing activities as are applicable to the goods delivered subject to reservations.
- 9.8 If the goods subject to the reservation of proprietary rights are combined inseparably with other objects not belonging to TECE, TECE shall acquire co-ownership of the new object in accordance with the proportion between the value of the goods subject to the reservation of proprietary rights (final invoice amount including VAT) and the value of the other, combined objects at the time of such combination. If the combination is done in such a way that the object of the purchaser is to be regarded as the main object, it shall be considered as agreed that the purchaser transfers proportionate co-ownership to TECE. The purchaser shall store the resulting sole or joint property for TECE.
- 9.9 TECE undertakes to release the securities, to which TECE is entitled, on request from the purchaser insofar as the marketable value of the securities, to which TECE is entitled, exceeds the accounts receivable to be covered by more than 10 %. The securities to be released shall be selected by TECE.

10. Applicable Law, Place of Jurisdiction, Partial Voidness

- 10.1 For all current and future claims under the business relationship with contractors, legal entities under public law and special funds under public law including cheque receivables and bill of exchange-related receivables, the exclusive place of jurisdiction shall be the registered office of TECE in Emsdetten. However, TECE shall also be entitled to sue the purchaser at the court responsible for the purchaser's place of domicile.
- 10.2 Unless otherwise stated in the order confirmation, the registered office of TECE in Emsdetten shall be the place of performance.
- 10.3 These terms and conditions and all legal relationships between TECE and the purchaser shall be subject to the law of the Federal Republic of Germany. Any applicability of the U.N. Convention of 11 April 1980 on Contracts for the International Sale of Goods (Federal Gazette 1989 II p. 588, adjusted 1990 II, 1699) shall be ruled out.

Emsdetten/Germany, July 2023

TECE GmbH, Hollefeldstr. 57, 48282 Emsdetten
Limited liability company, Local Court Steinfurt / Germany, HRB no. 7461
Managing Directors: Hans-Joachim Sahlmann, Peter Fehlings, André Welle, Dr. Michael Freitag

Pipe Systems

TECEflex PRESSURE- SLEEVE SYSTEM



	Page
Composite pipe	8
All-plastic pipe	12
Pressure sleeves	13
Fittings	14
Assembly elements	23
Radiator connection	27
System components	32
Manifolds	33
Gas installation	36
Accessories	38
Tools	40
Starter set	44
Spare parts	45
Technical pipe data	50
Dimensional drawings	54

TECEflex fittings based on the pressure sleeve principle must only be handled with original TECEflex system pipes and TECEflex tools. The guarantee will be invalid if non-system components are used.

Delivery unit 1 (DU 1) cannot be changed for technical reasons.

Information red brass/silicon bronze

For logistical reasons, it may occasionally happen that TECEflex silicon bronze fittings are supplied in red brass. Both materials are listed on the assessment basis for metallic materials in contact with potable water of the German Environment Office (UBA positive list) and fulfil the requirements according to § 17 paragraph 3 of the Drinking Water Ordinance. Fittings made of the two materials are to be regarded as equivalent. Mixed installations of red brass and silicon bronze fittings are possible without restrictions.

TECEflex – Composite pipe



TECEflex composite pipe

TECEflex – Composite pipe

The TECEflex composite pipe is equally suited for potable water and radiator installations as well as for the installation of compressed air systems. The TECEflex composite pipe is a universal pipe that combines the best properties of both metal and plastic pipes. The inner pipe consists of a PE-Xc basic standard pipe. This permits high pressure, temperature and corrosion resistance. The additional butt-welded aluminium sheathing serves both as a diffusion block and to reduce longitudinal deformation caused by heat. The TECEflex composite pipe is particularly easy to bend by hand, yet retains its rigidity.

The pipe meets the application classes according to ISO 21003 of class 2/10 bar for the potable water installation and class 5/10 bar for the heating installation. TECEflex is DVGW certified. The suitability as a compressed air pipe has been established by the test mark of the German Technical Inspectorate TÜV. The yellow composite pipe has been certificated for indoor gas installations in keeping with TRGI 2018 and TRF 2021 up to 100 mbar for gases of the second and third gas family (natural gas and liquefied gas) - German Technical and Scientific Association for Gas and Water (DVGW).

TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT

Multi-layer composite pipe according to EN ISO 21003, suitable for potable water, heating and compressed air installations.

Dimension	Item No.	DU 1	DU 2	DU 3
16 - Roll	732016	100 m	1000 m	2000 m
20 - Roll	732020	100 m	700 m	1400 m
25 - Roll	732025	50 m	250 m	500 m
32 - Roll	732032	25 m	125 m	250 m
16 - Rod	732216	100 m	-	-
20 - Rod	732220	70 m	-	-
25 - Rod	732225	45 m	-	-
32 - Rod	732232	30 m	-	-
40 - Rod	732240	15 m	-	-
50 - Rod	732250	15 m	-	-
63 - Rod	732263	5 m	-	-

(rod each 5 m)



TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT in corrugated sheath pipe, black

Multi-layer composite pipe according to EN ISO 21003, suitable for potable water, heating and compressed air installations.

Dimension	Item No.	DU 1	DU 2	DU 3
16 - Roll	731016	75 m	525 m	1050 m
20 - Roll	731020	50 m	350 m	700 m
25 - Roll	731025	25 m	175 m	350 m



TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT in corrugated sheath pipe, red

Multi-layer composite pipe according to EN ISO 21003, suitable for potable water, heating and compressed air installations.

Dimension	Item No.	DU 1	DU 2
16 - Roll	782103	75 m	525 m
20 - Roll	782105	50 m	350 m



TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT in corrugated sheath pipe, blue

Multi-layer composite pipe according to EN ISO 21003, suitable for potable water, heating and compressed air installations.

Dimension	Item No.	DU 1	DU 2
16 - Roll	782104	75 m	525 m
20 - Roll	782106	50 m	350 m

**TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT pre-insulated, 6 mm insulation, red**

Multi-layer composite pipe according to EN ISO 21003 for potable water and heating installation, pre-insulated with 6 mm PE insulation ($\lambda_R = 0.04 \text{ W/mK}$) and tear-proof PE foil (colour: red). Can be used in accordance with DIN 1988-200 (table 8, no. 4/5 and table 9, no. 6). Normal flammability according to EN 13501 class E; 100 % HCFC and HFC free.

Dimension	Item No.	DU 1	DU 2	DU 3
16 - 6 mm insulation	731116	75 m	300 m	600 m
20 - 6 mm insulation	731120	75 m	300 m	600 m
25 - 6 mm insulation	731125	50 m	200 m	400 m

**TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT pre-insulated, 6 mm insulation, blue**

Multi-layer composite pipe according to EN ISO 21003 for potable water and heating installation, pre-insulated with 6 mm PE insulation ($\lambda_R = 0.04 \text{ W/mK}$) and tear-proof PE foil (colour: blue). Can be used in accordance with DIN 1988-200 (table 8, no. 4/5 and table 9, no. 6). Normal flammability according to EN 13501 class E; 100 % HCFC and HFC free.

Dimension	Item No.	DU 1	DU 2	DU 3
16 - 6 mm insulation	731316	75 m	300 m	600 m
20 - 6 mm insulation	731320	75 m	300 m	600 m
25 - 6 mm insulation	731325	50 m	200 m	400 m

**TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT pre-insulated, 9 mm insulation, red**

Multi-layer composite pipe according to EN ISO 21003 for potable water and heating installation, pre-insulated with 9 mm PE insulation ($\lambda_R = 0.04 \text{ W/mK}$) and tear-proof PE foil (colour: red). Can be used in accordance with GEG 2021 (appendix 8 line gg) and DIN 1988-200 (table 8, no. 1). Normal flammability according to EN 13501 class E; 100 % HCFC and HFC free.

Dimension	Item No.	DU 1	DU 2	DU 3
16 - 9 mm insulation	731616	75 m	225 m	450 m
20 - 9 mm insulation	731620	75 m	225 m	450 m
25 - 9 mm insulation	731625	50 m	150 m	300 m



TECEflex – Composite pipe

TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT pre-insulated, 9 mm insulation, blue

Multi-layer composite pipe according to EN ISO 21003 for potable water and heating installation, pre-insulated with 9 mm PE insulation ($\lambda_R = 0.04 \text{ W/mK}$) and tear-proof PE foil (colour: blue). Can be used in accordance with GEG 2021 (appendix 8 line hh) and DIN 1988-200 (table 8, no. 1). Normal flammability according to EN 13501 class E; 100 % HCFC and HFC free.



Dimension	Item No.	DU 1	DU 2	DU 3
16 - 9 mm insulation	732116	75 m	225 m	450 m
20 - 9 mm insulation	732120	75 m	225 m	450 m
25 - 9 mm insulation	732125	50 m	150 m	300 m

TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT pre-insulated, 13 mm insulation, red

Multi-layer composite pipe according to EN ISO 21003 for potable water and heating installation, pre-insulated with 13 mm PE insulation ($\lambda_R = 0.04 \text{ W/mK}$) and tear-proof PE foil (colour: red). Can be used in accordance with GEG 2021 (appendix 8 line ee) and DIN 1988-200 (table 8, no. 2 and 6). Normal flammability according to EN 13501 class E; 100 % HCFC and HFC free.



Dimension	Item No.	DU 1	DU 2	DU 3
16 - 13 mm insulation	731916	50 m	150 m	300 m
20 - 13 mm insulation	731920	50 m	150 m	300 m
25 - 13 mm insulation	731925	25 m	100 m	200 m

TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT pre-insulated, 26 mm insulation, red

Multi-layer composite pipe according to EN ISO 21003 for potable water and heating installation, pre-insulated with 26 mm PE insulation ($\lambda_R = 0.04 \text{ W/mK}$) and tear-proof PE foil (colour: red). Can be used in accordance with GEG 2021 (Appendix 8 line Aa) and DIN 1988-200 (table 8, nos. 2 and 6). Normal flammability according to EN 13501 class E; 100 % HCFC and HFC free.



Dimension	Item No.	DU 1	DU 2	DU 3
16 - RS 26 mm	732616	25 m	50 m	100 m
20 - RS 26 mm	732620	25 m	50 m	100 m
25 - RS 26 mm	732625	25 m	50 m	100 m

TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT, yellow

Multi-layer composite pipe suitable for indoor gas installations. The regulations in accordance with TRGI 2018 and TRF 2021 shall apply for the installation.

Dimension	Item No.	DU 1	DU 2	DU 3
16 - Roll	732316	100 m	1000 m	2000 m
16 - Roll	732330	25 m	250 m	-
20 - Roll	732320	100 m	700 m	1400 m
20 - Roll	732331	25 m	250 m	-
25 - Roll	732325	50 m	250 m	500 m
25 - Roll	732332	25 m	250 m	-
32 - Roll	782032	25 m	125 m	-
16 - Rod	732416	100 m	-	-
20 - Rod	732420	70 m	-	-
25 - Rod	732425	45 m	-	-
32 - Rod	732432	30 m	-	-

(rod each 5 m)

**TECEflex corrugated sheath pipe, yellow for 32 mm TECEflex multi-layer composite pipe**

Yellow corrugated sheath pipe 32 mm for yellow TECEflex multi-layer composite pipe.

Dimension	Item No.	DU 1	DU 2
32 - Roll	782033	25 m	250 m

**TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT, yellow, in yellow corrugated sheath pipe**

Multi-layer composite pipe suitable for indoor gas installations. The regulations in accordance with TRGI 2018 and TRF 2021 shall apply for the installation.

Dimension	Item No.	DU 1	DU 2
16 - Roll	782016	50 m	500 m
20 - Roll	782020	50 m	350 m
25 - Roll	782025	25 m	150 m



TECEflex – All-plastic pipe

TECEflex PE-Xc potable water pipe

PE-Xc potable water pipe to DIN 16892.

Dimension	Item No.	DU 1	DU 2	DU 3
16 - Roll	700516	50 m	500 m	1000 m
20 - Roll	700520	50 m	500 m	1000 m
25 - Roll	700525	50 m	350 m	700 m



TECEflex heating pipe for radiator connection

Heating pipe for radiator connection made of PE-Xc, silver-coloured, diffusion-tight in accordance with DIN 4726.

Dimension	Item No.	DU 1	DU 2	DU 3
16 - Roll	702016	120 m	1200 m	2400 m
20 - Roll	702020	75 m	750 m	1500 m
25 - Roll	702025	75 m	525 m	1050 m



TECEflex pressure sleeve for multi-layer composite pipe

Gold-coloured pressure sleeve for multi-layer composite pipe for press-connections with TECEflex PE-Xc/Al/PE-RT multi-layer composite pipes.

Please note:

Be sure to order pressure sleeves separately from the fittings!



PE-Xc/Al/PE-RT

Dimension	Item No.	DU 1	DU 2	DU 3
16	734516	50 pc.	500 pc.	32000 pc.
20	734520	50 pc.	500 pc.	32000 pc.
25	734525	50 pc.	250 pc.	16000 pc.
32	734532	25 pc.	100 pc.	-
40	734540	15 pc.	60 pc.	-
50	734550	10 pc.	50 pc.	-
63	734563	5 pc.	20 pc.	-

TECEflex pressure sleeve for all-plastic pipe, nickel-plated

Silver-coloured pressure sleeve for TECEflex all-plastic pipes.

Please note:

Be sure to order pressure sleeves separately from the fittings!



PE-Xc

Dimension	Item No.	DU 1	DU 2
16	704016	50 pc.	500 pc.
20	704020	50 pc.	500 pc.
25	704025	50 pc.	150 pc.

TECEflex – Fittings

TECEflex female connector

Silicon bronze



PPSU

Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.	Item No.
16 x Rp 1/2"	10 pc.	100 pc.	705102	-	765002
20 x Rp 1/2"	10 pc.	100 pc.	705103	-	765003
20 x Rp 3/4"	10 pc.	100 pc.	705104	-	765004
25 x Rp 1"	5 pc.	20 pc.	705106	-	765009
25 x Rp 3/4"	10 pc.	100 pc.	705105	-	765007
32 x Rp 1"	5 pc.	20 pc.	705107	-	765008
40 x Rp 1 1/2"	2 pc.	20 pc.	705108	-	765010
50 x Rp 2"	2 pc.	10 pc.	705109	-	-
63 x Rp 2"	1 pc.	5 pc.	705110	-	-

TECEflex male connector

Silicon bronze



PPSU

Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.	Item No.
16 x R 1/2"	10 pc.	100 pc.	705601	-	765502
16 x R 3/4"	10 pc.	100 pc.	705602	-	765506
16 x R 3/8"	10 pc.	100 pc.	-	-	765514
20 x R 1/2"	10 pc.	100 pc.	705603	-	765503
20 x R 3/4"	10 pc.	100 pc.	705604	-	765504
25 x R 1"	10 pc.	50 pc.	705606	-	765508
25 x R 3/4"	10 pc.	50 pc.	705605	-	765507
32 x R 1"	5 pc.	50 pc.	705607	-	765509
32 x R 1 1/4"	5 pc.	50 pc.	705608	-	765510
40 x R 1 1/4"	2 pc.	20 pc.	705609	-	765511
50 x R 1 1/2"	2 pc.	10 pc.	705610	-	765512
63 x R 2"	1 pc.	5 pc.	705611	-	765513

TECEflex coupling

Silicon bronze



PPSU



Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.	Item No.
14 x 14	10 pc.	100 pc.	720594	-	-
16 x 16	10 pc.	100 pc.	706216	736016	766016
20 x 20	10 pc.	100 pc.	706220	736020	766020
25 x 25	10 pc.	50 pc.	706225	736025	766025
32 x 32	5 pc.	50 pc.	706232	736032	766032
40 x 40	2 pc.	20 pc.	706240	736040	766040
50 x 50	2 pc.	10 pc.	706250	-	766050
63 x 63	1 pc.	5 pc.	706263	-	766063

TECEflex coupling reduced

Silicon bronze



PPSU



Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.	Item No.
16 x 14	10 pc.	100 pc.	720595	-	-
20 x 16	10 pc.	100 pc.	706603	736503	766503
25 x 16	10 pc.	50 pc.	706604	736504	766504
25 x 20	10 pc.	50 pc.	706605	736505	766505
32 x 20	5 pc.	30 pc.	706606	736506	766506
32 x 25	5 pc.	30 pc.	706607	736507	766507
40 x 32	2 pc.	20 pc.	706608	736508	766508
50 x 40	2 pc.	10 pc.	706609	-	766509
63 x 50	1 pc.	5 pc.	706610	-	-

TECEflex 90° elbow

Silicon bronze

PPSU

Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.	Item No.
16 x 16	10 pc.	200 pc.	-	737016	767016
20 x 20	10 pc.	100 pc.	-	737020	767020
25 x 25	10 pc.	40 pc.	-	737025	767025
32 x 32	5 pc.	40 pc.	-	737032	767032
40 x 40	2 pc.	20 pc.	-	737040	767040
50 x 50	2 pc.	10 pc.	-	-	767050
63 x 63	1 pc.	5 pc.	-	-	767063

TECEflex 90° elbow pressure-loss optimised, silicon bronze

90° coupling made of silicon bronze, elbow with pressure-loss optimised design and favourable flow characteristics. Low zeta value due to low-loss change of direction via arcuate bends and the very nearly identical inner cross-section of the pipe and fitting.



Dimension	Item No.	DU 1	DU 2
14 x 14	720593	10 pc.	200 pc.
16 x 16	707316	10 pc.	200 pc.
20 x 20	707320	10 pc.	100 pc.
25 x 25	707325	10 pc.	40 pc.
32 x 32	707332	5 pc.	40 pc.
40 x 40	707340	2 pc.	20 pc.
50 x 50	707350	2 pc.	10 pc.
63 x 63	707363	1 pc.	5 pc.

TECEflex – Fittings

TECEflex 45° elbow

Silicon bronze



Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.
25 x 25	10 pc.	40 pc.	707167	767125
32 x 32	5 pc.	20 pc.	707168	767132
40 x 40	2 pc.	20 pc.	707169	767140
50 x 50	2 pc.	10 pc.	707165	-
63 x 63	1 pc.	5 pc.	707166	-

TECEflex female elbow

Silicon bronze



Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.
16 x Rp 1/2"	10 pc.	150 pc.	708101	768016
20 x Rp 1/2"	10 pc.	150 pc.	708102	768020
20 x Rp 3/4"	10 pc.	50 pc.	708103	768002
25 x Rp 3/4"	10 pc.	40 pc.	708104	768025
32 x Rp 1"	5 pc.	20 pc.	708105	768032
40 x Rp 1 1/2"	2 pc.	10 pc.	708106	-
50 x Rp 1 1/2"	2 pc.	10 pc.	708107	-

TECEflex male elbow

Silicon bronze



Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.
16 x R 1/2"	10 pc.	80 pc.	707801	767516
20 x R 1/2"	10 pc.	80 pc.	707802	767520
20 x R 3/4"	10 pc.	60 pc.	707803	767501
25 x R 1"	10 pc.	50 pc.	707805	767526
25 x R 3/4"	10 pc.	50 pc.	707804	767525
32 x R 1"	10 pc.	20 pc.	707806	767532

TECEflex compact angled connector, silicon bronze

Dimension	Item No.	DU 1	DU 2
16 x Rp 1/2"	708100	10 pc.	150 pc.



TECEflex tee female thread

Silicon bronze



PPSU

Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.	Item No.
16 x Rp 1/2" x 16	10 pc.	60 pc.	709801	-	769516
20 x Rp 1/2" x 20	10 pc.	40 pc.	709802	-	769520
25 x Rp 1/2" x 25	10 pc.	30 pc.	709803	-	769522
25 x Rp 3/4" x 25	10 pc.	20 pc.	709804	-	769525
32 x Rp 1/2" x 32	5 pc.	20 pc.	-	-	769527
32 x Rp 1" x 32	5 pc.	20 pc.	709805	-	769532
40 x Rp 1/2" x 40	1 pc.	10 pc.	-	-	769534
40 x Rp 1" x 40	1 pc.	10 pc.	709806	-	769540
40 x Rp 3/4" x 40	1 pc.	10 pc.	709809	-	-
50 x Rp 1 1/4" x 50	1 pc.	10 pc.	709807	-	-
50 x Rp 3/4" x 50	1 pc.	10 pc.	709810	-	-
63 x Rp 1 1/2" x 63	1 pc.	5 pc.	709808	-	-
63 x Rp 3/4" x 63	1 pc.	5 pc.	709811	-	-

TECEflex tee

Silicon bronze



PPSU



Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.	Item No.
14 x 14 x 14	10 pc.	150 pc.	720591	-	-
16 x 16 x 16	10 pc.	150 pc.	710116	730916	760016
20 x 20 x 20	10 pc.	80 pc.	710120	730920	760020
25 x 25 x 25	10 pc.	40 pc.	710125	730925	760025
32 x 32 x 32	5 pc.	20 pc.	710132	730932	760032
40 x 40 x 40	2 pc.	10 pc.	710140	730940	760040
50 x 50 x 50	1 pc.	5 pc.	710150	-	-
63 x 63 x 63	1 pc.	5 pc.	710163	-	-

TECEflex – Fittings

TECEflex tee reduced

Silicon bronze



PPSU



Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.	Item No.
16 x 14 x 16	10 pc.	100 pc.	720592	-	-
16 x 20 x 16	10 pc.	50 pc.	710601	730504	760504
20 x 16 x 16	10 pc.	50 pc.	710602	730508	760508
20 x 16 x 20	10 pc.	100 pc.	710603	730509	760509
20 x 20 x 16	10 pc.	100 pc.	710604	730511	760511
20 x 25 x 20	10 pc.	40 pc.	710609	730521	760521
25 x 16 x 16	10 pc.	40 pc.	-	730516	760516
25 x 16 x 20	10 pc.	40 pc.	710605	730544	760544
25 x 16 x 25	10 pc.	30 pc.	710606	730514	760514
25 x 20 x 20	10 pc.	30 pc.	710607	730522	760522
25 x 20 x 25	10 pc.	20 pc.	710608	730515	760515
25 x 32 x 25	5 pc.	30 pc.	-	-	760517
32 x 16 x 32	5 pc.	40 pc.	710610	730537	760537
32 x 20 x 25	5 pc.	40 pc.	-	-	760518
32 x 20 x 32	5 pc.	30 pc.	710611	730519	760519
32 x 25 x 25	5 pc.	30 pc.	710613	730520	760520
32 x 25 x 32	5 pc.	30 pc.	710612	730523	760523
32 x 32 x 20	5 pc.	20 pc.	-	-	760529
40 x 20 x 40	2 pc.	20 pc.	710614	730536	760536
40 x 25 x 32	2 pc.	20 pc.	-	-	760543
40 x 25 x 40	2 pc.	20 pc.	710615	730533	760533
40 x 32 x 32	2 pc.	20 pc.	710617	730525	760525
40 x 32 x 40	2 pc.	8 pc.	710616	730524	760524
50 x 20 x 50	1 pc.	5 pc.	710618	-	-
50 x 25 x 50	1 pc.	5 pc.	710619	-	760534
50 x 32 x 50	1 pc.	5 pc.	710620	-	760526
50 x 40 x 50	1 pc.	5 pc.	710621	-	-
63 x 32 x 63	1 pc.	5 pc.	710622	-	-
63 x 50 x 63	1 pc.	5 pc.	710623	-	-

TECEflex screw connection, flat sealing

Silicon bronze



Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.
16 x 1/2"	10 pc.	100 pc.	717601	767578
16 x 3/4"	10 pc.	100 pc.	717602	767570
16 x 3/8"	5 pc.	100 pc.	-	767579
20 x 1/2"	10 pc.	100 pc.	-	767575
20 x 1"	5 pc.	50 pc.	717604	767576
20 x 3/4"	5 pc.	100 pc.	717603	767572
25 x 1"	5 pc.	50 pc.	717605	767574
25 x 1 1/4"	5 pc.	30 pc.	717606	-
25 x 3/4"	5 pc.	50 pc.	-	767573
32 x 1"	5 pc.	30 pc.	-	767581
32 x 1 1/2"	1 pc.	15 pc.	717608	-
32 x 1 1/4"	1 pc.	25 pc.	717607	-

TECEflex elbow coupling flat sealing, standard brass*

Dimension	Item No.	DU 1	DU 2
16 x 1/2"	767590	10 pc.	100 pc.
20 x 1/2"	767591	10 pc.	100 pc.
25 x 3/4"	767592	10 pc.	40 pc.



TECEflex quick adapter straight, silicon bronze

Quick adapter to connect pressed TECEflex pipes to a 1/2" TECE quick connection without tools. The TECE cisterns are equipped with compatible quick connectors.



Dimension	Item No.	DU 1	DU 2
16 x 1/2"	708630	10 pc.	100 pc.

TECEflex quick adapter 90° angle, silicon bronze

Quick adapter to connect pressed TECEflex pipes to a 1/2" TECE quick connection without tools. The TECE cisterns are equipped with compatible quick connectors.



Dimension	Item No.	DU 1	DU 2
16 x 1/2"	708631	10 pc.	100 pc.

TECEflex quick adapter tee through type, silicon bronze

Quick adapter to connect pressed TECEflex pipes to a 1/2" TECE quick connection without tools. The TECE cisterns are equipped with compatible quick connectors.



Dimension	Item No.	DU 1	DU 2
16 x 16 x 1/2"	708632	10 pc.	50 pc.

* For the selection of materials, please refer to the information in the "Technical pipe data" chapter.

TECEflex – Fittings

TECEflex quick adapter tee outlet, silicon bronze

Quick adapter to connect pressed TECEflex pipes to a 1/2" TECE quick connection without tools. The TECE cisterns are equipped with compatible quick connectors.



Dimension	Item No.	DU 1	DU 2
16 x 1/2" x 16	708633	10 pc.	50 pc.

TECEflex end plug

Silicon bronze

PPSU

Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.	Item No.
16	10 pc.	200 pc.	-	730616	765116
20	10 pc.	200 pc.	-	730620	765120

TECEflex wall disk

Silicon bronze

PPSU

Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.	Item No.
14 x Rp 1/2"	10 pc.	100 pc.	720590	-	-
16 x Rp 1/2"	10 pc.	100 pc.	708610	-	768516
20 x Rp 1/2"	10 pc.	50 pc.	708611	-	768520
20 x Rp 3/4"	10 pc.	30 pc.	708612	-	768525
25 x Rp 3/4"	10 pc.	20 pc.	708613	-	768526

TECEflex wall disk, outlet 54 mm long, standard brass*

Dimension	Item No.	DU 1	DU 2
16 x Rp 1/2"	768503	10 pc.	100 pc.



TECEflex wall disk, long

Silicon bronze

PPSU

Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.	Item No.
16 x Rp 1/2"	10 pc.	20 pc.	708614	-	768502

TECEflex double wall disk, standard brass*

Dimension	Item No.	DU 1	DU 2
16 x 1/2" x 16	768501	10 pc.	30 pc.

**TECEflex double wall disk long, silicon bronze**

Dimension	Item No.	DU 1	DU 2
16 x Rp 1/2" x 16	708628	10 pc.	30 pc.

**TECEflex U-double wall disk pressure-loss optimised, silicon bronze**

U-double wall disk made of silicon bronze for O-ring free pressure sleeve connection of TECEflex pipes with threaded fittings or fittings with a thread to EN 10226. Fitting with optimised flow resistance coefficient (Zeta value). Suitable for all potable water qualities. Without TECEflex pressure sleeves.

Dimension	Item No.	DU 1	DU 2
16 x Rp 1/2" x 16	708625	10 pc.	30 pc.
20 x Rp 1/2" x 20	708626	10 pc.	30 pc.

**TECEflex U-double wall disk reduced pressure-loss optimised, silicon bronze**

Dimension	Item No.	DU 1	DU 2
16 x Rp 1/2" x 20	708606	10 pc.	30 pc.
20 x Rp 1/2" x 16	708607	10 pc.	30 pc.

**TECEflex double connection pressure-loss optimised, silicon bronze**

Dimension	Item No.	DU 1	DU 2
16 x R 1/2"	708608	10 pc.	30 pc.

**TECEflex wall bushing with pressure ring, silicon bronze**

Wall bushing made of silicon bronze with pressure ring for O-ring free pressure sleeve connection of TECEflex pipes with threaded fittings or fittings with a thread to EN 10226. Adjustable for wall thicknesses between 18-25 mm. Including pressure ring, screws and sound-insulation insert (without TECEflex pressure sleeves).

Dimension	Item No.	DU 1	DU 2
16 x Rp 1/2"	708705	10 pc.	20 pc.



* For the selection of materials, please refer to the information in the "Technical pipe data" chapter.

TECEflex – Fittings

TECEflex universal wall bushing, silicon bronze

One side 1/2" female thread, other side 1/2" male thread, made of silicon bronze with pressure ring. Adjustable for wall thicknesses between 18-25 mm.

Dimension	Item No.	DU 1	DU 2
R 1/2" x Rp 1/2"	708706	10 pc.	40 pc.



TECEflex pressure-soldered connection, silicon bronze

As adapter from stainless steel or copper pipe to TECEflex. Suitable for V- or M-contour pressed fittings. Also suitable for soldering.

Dimension	Item No.	DU 1	DU 2
16 x 15 mm Cu	716316	10 pc.	150 pc.
20 x 18 mm Cu	716320	10 pc.	100 pc.
20 x 22 mm Cu	716321	10 pc.	100 pc.
25 x 22 mm Cu	716325	10 pc.	50 pc.
32 x 28 mm Cu	716332	10 pc.	50 pc.



TECEflex Cu soldered connection made of standard brass*

Soldered connection as transition (internal/external) from copper pipes to TECEflex, suitable only for soldering.

Dimension	Item No.	DU 1	DU 2
14 x 15/18 mm Cu	713914	10 pc.	150 pc.
16 x 15/18 mm Cu	713916	10 pc.	150 pc.
20 x 18/22 mm Cu	713920	10 pc.	100 pc.
25 x 22/28 mm Cu	713925	10 pc.	50 pc.



TECEflex system adapter copper pipe

Permanent adapter from copper pipe to TECEflex. Not approved for gas installation.

Dimension	Item No.	DU 1	DU 2
16 x 15 mm Cu	713816	5 pc.	100 pc.



TECEflex joint adapter for TECO FASTEC, standard brass

Joint adapter for connecting TECEflex pipes to TECO FASTEC products.

Dimension	Item No.	DU 1	DU 2
16	716350	10 pc.	100 pc.
20	716351	10 pc.	100 pc.
25	716352	10 pc.	50 pc.



TECEflex mounting unit with wall disks, silicon bronze, sound-proofing elements and fastener for high-temperature drain bend

Pre-assembled fastener with:

- 2 sound-insulation disks
- 2 wall disks, silicon bronze
- 2 sound-insulation domes
- Fastener for a high-temperature drain bend (without TECEflex pressure sleeves)



Dimension	Centre	Item No.	DU 1	DU 2
16 x Rp 1/2"	80 mm	720565	1 pc.	10 pc.

TECEflex mounting unit with reinforced brackets made of galvanised sheet steel, wall disks made of standard brass and sound insulation caps*

Pre-assembled fastener with:

- 2 sound-insulation disks
- 2 wall disks, standard brass
- 2 sound-insulation domes



Dimension	Centre	Item No.	DU 1	DU 2
16 x Rp 1/2"	150 mm	721009	1 pc.	10 pc.

TECEflex assembly unit with wall disks made of silicone bronze and sound insulation boxes

Preassembled nickel-plated steel bracket with:

- 2 wall disks in silicone bronze
- 2 sound insulation boxes made of high-quality EPP with heat and sound insulating properties. This corresponds to a thermal insulation according to GEG 2021 (Annex 8, line ee) with a special receptacle for the Seal System sealing sleeve 1/2" (Item No. 704801).

(without TECEflex pressure sleeves)



Dimension	Centre	Item No.	DU 1	DU 2
16 x Rp 1/2"	150 mm	720567	1 pc.	10 pc.
20 x Rp 1/2"	150 mm	720568	1 pc.	10 pc.

TECEflex mounting unit with wall disks made of standard brass*

Dimension	Centre	Item No.	DU 1	DU 2
16 x Rp 1/2"	150 mm	765130	1 pc.	10 pc.



* For the selection of materials, please refer to the information in the "Technical pipe data" chapter.

TECEflex – Assembly elements

TECEflex assembly unit with wall disks made of silicone bronze and sound insulation boxes

Preassembled nickel-plated steel bracket with:

- 2 U-double wall disks in silicone bronze
- 2 sound insulation boxes made of high-quality EPP with heat and sound insulating properties. This corresponds to thermal insulation according to GEG 2021 (Annex 8, line ee) with a special recess for the Seal System sealing sleeve 1/2" (Item No. 704801).

(without TECEflex pressure sleeves)



Dimension	Centre	Item No.	DU 1	DU 2
16 x Rp 1/2" x 16	150 mm	720569	1 pc.	10 pc.

TECE sound-proofing element

Sound-proofing element for TECEflex and TECElogo wall disks. To minimize transmission of noise to the structure; consisting of sound insulation inserts and sound-proofing cover.



Dimension	Item No.	DU 1	DU 2
For 1/2" wall disks	718017	10 pc.	40 pc.
For 1/2" wall disks, long	718022	10 pc.	40 pc.
For 1/2" U-double wall disks	718024	10 pc.	40 pc.

Caution: Not suitable for use with the Seal System sealing sleeve.

TECE sound insulation box with a special recess for the Seal System sealing sleeve

Sound insulation box for TECEflex and TECElogo wall disks made of high-quality EPP with heat and sound insulation properties. Corresponds to thermal insulation according to GEG 2021 (Annex 8, line ee), specially for combination with the Seal System sealing sleeve.



Dimension	Item No.	DU 1	DU 2
16-20 x Rp 1/2"	718031	10 pc.	40 pc.

TECE sound shield for wall disk

Sound shield for TECEflex and TECElogo wall disks. To reduce noise transmission to structure.



Item No.	DU 1	DU 2
718026	10 pc.	100 pc.

TECEflex mounting unit with wall disks silicon bronze

Pre-assembled fastener with two silicon bronze wall disks.

Dimension	Item No.	DU 1	DU 2
16 x Rp 1/2"	720550	5 pc.	25 pc.



TECE Seal System assembly plug with sealing sleeve

Reusable special assembly plug for mounting the sealing sleeve in the shell construction phase. Suitable for leak and load testing with air or water. With a metallic thread made of material suitable for drinking water, including Seal System sealing sleeve.



Dimension	Item No.	DU 1	DU 2
1/2"	704802	6 pc.	-
3/4"	704812	10 pc.	50 pc.

TECE Seal System sealing sleeve

Sealing sleeve for creating a standard-compliant wall bushing with walls exposed to water in accordance with DIN 18534 (2017).

Leak water created by an unsealed threaded connection between the wall disk and the valve extension is guided forwards out of the wall. In addition to the TECE wall disks, also suitable for many third-party products.



Dimension	Item No.	DU 1	DU 2
1/2"	704801	10 pc.	-
3/4"	704811	10 pc.	50 pc.

In connection with the Seal System sealing sleeve and a suitable sealing grout. The suitability of external products can be found in the technical information.

TECE Seal System assembly plug with filling and emptying valve with sealing sleeve

Reusable assembly plug with a filling and emptying valve, equipped with a hose connection.



Dimension	Item No.	DU 1	DU 2
1/2"	704809	10 pc.	30 pc.

TECE Seal System sealing collar

Seal System sealing collar for sealing against intrusion of moisture into the wall via fitting connections.



Dimension	Version	Item No.	DU 1	DU 2
140 x 140 mm	1/2"	704803	10 pc.	500 pc.
170 x 170 mm	3/4"	704813	10 pc.	500 pc.

TECE Seal System sealing set 1/2" for wall bushings

Seal System sealing set consisting of:

- 2 x assembly plugs
- 2 x sealing sleeves
- 2 x sealing collars



Item No.	DU 1
704805	1 pc.

TECEflex – Assembly elements

TECE fastener made of galvanized steel, single

To fasten TECEflex and TECElogo wall disks, angled, made of galvanized steel.

Item No.	DU 1	DU 2
720527	10 pc.	80 pc.



TECE fastener made of galvanized steel, double

To fasten TECEflex and TECElogo wall disks, angled, made of galvanized steel. Suitable for centres 150 and 80 mm.

Item No.	DU 1	DU 2
720528	5 pc.	20 pc.



TECE fastener made of galvanized steel, double

Item No.	DU 1	DU 2
721005	5 pc.	25 pc.



TECE screw

To fasten TECEflex and TECElogo wall disks to galvanized steel fasteners.

Dimension	Item No.	DU 1	DU 2
3,5 x 16 mm	720524	100 pc.	3000 pc.



TECEflex 15 mm radiator mounting bracket, nickel-plated copper

To connect compact radiators with integrated valves.

Dimension	Length	Item No.	DU 1	DU 2
14 x 15 mm Cu	300 mm	7 140 14	10 pc.	50 pc.
16 x 15 mm Cu	300 mm	7 140 16	10 pc.	50 pc.
20 x 15 mm Cu	300 mm	7 140 20	10 pc.	50 pc.
16 x 15 mm Cu	1100 mm	7 145 16	6 pc.	60 pc.

**TECEflex 15 mm radiator mounting tee, nickel-plated copper**

To connect compact radiators with integrated valves.

Dimension	Length	Item No.	DU 1	DU 2
16 x 15 mm Cu	300 mm	7 150 16	10 pc.	60 pc.
20 x 15 mm Cu	300 mm	7 150 20	10 pc.	50 pc.

**TECEflex radiator assembly set for compact valve heaters, floor-mounted, nickel-plated**

To connect compact radiators with integrated valves through the floor.

Dimension	Centre	Item No.	DU 1	DU 2
16 x 15 mm Cu	50 mm	7 149 01	1 pc.	10 pc.

**TECEflex radiator mounting set for compact radiator with integrated valve, wall-mounted, nickel-plated**

To connect compact radiators with integrated valves through the wall.

Dimension	Centre	Item No.	DU 1	DU 2
16 x 15 mm Cu	50 mm	7 149 05	1 pc.	10 pc.

**TECE skirting board radiator elbow shut-offs**

Made of 15 mm nickel-plated Cu pipe, adjustable and with shut-off, for connection of radiator to TECEflex or TECLogo-Push skirting board radiator connection set.

Dimension	Item No.	DU 1	DU 2
15 mm Cu	730010	1 set	25 set



TECEflex – Radiator connection

TECE skirting board radiator elbows

Made of nickel-plated copper pipe 15 mm, for connecting the radiator to standard skirting board connection fittings.

Dimension	Item No.	DU 1	DU 2
15 mm Cu	730025	1 set	20 set



TECE male pinch screw connection 1/2"

15 mm, nickel-plated pinch screw connection to join TECEflex/TECElogo radiator mounting elbow or radiator tees to thermostat valves or to the radiator screw connections.

Dimension	Item No.	DU 1	DU 2
15 mm x R 1/2"	717501	10 pc.	150 pc.



TECEflex radiator mounting unit for compact radiator with integrated valve, wall-mounted

For simplified connection of compact radiators with integrated valves through the wall, TECEflex composite pipe dim. 16 in 9 mm PE insulating tube, λ_R 0.040 W/(mK), with sturdy fixing option, radiator valve spacing 50 mm. Installation height 210 mm.

Dimension	Item No.	DU 1	DU 2
16	714907	1 pc.	5 pc.



TECEflex cross fitting

Made of nickel-plated brass. For simplified connection of radiator connection lines in the floor construction.

Dimension	Item No.	DU 1	DU 2
16 x 16 x 16	718501	1 pc.	10 pc.
20 x 16 x 16	718502	1 pc.	10 pc.
20 x 16 x 20	718503	1 pc.	10 pc.



TECEflex protection box made of PS for cross-fittings

To separate TECEflex cross-fittings from the building structure, made of cfc-free PS.

Dimension	Item No.	DU 1	DU 2
16-20	718020	1 pc.	10 pc.



TECEflex radiator installation box for compact valve heaters

For simplified connection of compact valve radiators through the wall, pipe layout in PUR insulating body, without plaster base board, radiator valve spacing 50 mm, installation height 230 mm, TECEflex composite pipe dim. 16.

Dimension	Item No.	DU 1	DU 2
16	716116	1 pc.	5 pc.



TECE thermostat head

TECE thermostat head M 30 x 1.5, setting range 7-28 °C.

Colour	Item No.	DU 1	DU 2
White	8740461	1 pc.	75 pc.

**TECE thermostat valve body, through type**

Thermostat valve body, through type, preconfigurable.

Dimension	Item No.	DU 1	DU 2
R 1/2" x Rp 1/2"	8740431	1 pc.	20 pc.

**TECE thermostat valve body, corner type**

Thermostat valve body, corner type, preconfigurable.

Dimension	Item No.	DU 1	DU 2
R 1/2" x Rp 1/2"	8740432	1 pc.	20 pc.

**TECE thermostat valve, through type**

Thermostat valve lower part, 90° presettable.

Dimension	Item No.	DU 1	DU 2
R 1/2" x Rp 1/2"	8740463	1 pc.	20 pc.

**TECE radiator return screw connection, through type**

Radiator return screw connection, through type.

Dimension	Item No.	DU 1	DU 2
R 1/2" x Rp 1/2"	8740433	1 pc.	20 pc.

**TECE radiator return screw connection, corner type**

Radiator return screw connection, corner version.

Dimension	Item No.	DU 1	DU 2
R 1/2" x Rp 1/2"	8740434	1 pc.	20 pc.

**TECE two-pipe valve block for HC, through type**

Two-pipe valve block for radiator, through type with 3/4" Eurocone.

Dimension	Item No.	DU 1	DU 2
3/4" EC x 3/4" EC	8740435	1 pc.	10 pc.



TECEflex – Radiator connection

TECE two-pipe valve block for HC, corner type

Two-pipe valve block for radiator, corner type with 3/4" Eurocone.

Dimension	Item No.	DU 1	DU 2
3/4" EC x 3/4" EC	8740436	1 pc.	10 pc.



TECE two-pipe valve block for HC 1/2" MT, through type

Two-pipe valve block for radiator, through type with 1/2" male thread and 3/4" Eurocone.

Dimension	Item No.	DU 1	DU 2
3/4" EC x R 1/2"	8740437	1 pc.	10 pc.



TECE two-pipe valve block for HC 1/2" MT, corner type

Two-pipe valve block for radiator, corner type with 1/2" male thread and 3/4" Eurocone.

Dimension	Item No.	DU 1	DU 2
3/4" EC x R 1/2"	8740438	1 pc.	10 pc.



TECEflex clamped joint for all-plastic pipes*

To connect TECEflex all-plastic pipes to a Eurocone 3/4" MT. Designed for use in heating installations only.

Dimension	Item No.	DU 1	DU 2
14	7 13014	10 pc.	100 pc.
16	7 13516	10 pc.	100 pc.
20	7 13020	10 pc.	100 pc.



TECEflex clamped joint for TECEflex multi-layer composite pipe*

To connect TECEflex multi-layer composite pipes to a 3/4" Eurocone with male thread. Designed for use in heating installations only.

Dimension	Item No.	DU 1	DU 2
14	7 13314	10 pc.	100 pc.
16	7 13316	10 pc.	100 pc.
20	7 13320	10 pc.	100 pc.



TECE Eurocone clamped joint for copper pipes*

Eurocone clamped joint for copper pipes 15 x 1 mm, with nickel-plated 3/4" union nut and Eurocone.

Dimension	Item No.	DU 1	DU 2
3/4" for copper pipe 15 x 1	8740439	2 pc.	100 pc.



TECEflex Eurocone screw connection 3/4" with TECEflex pressure connection made of brass, nickel-plated*

Designed for use in heating installations only.

Dimension	Item No.	DU 1	DU 2
16	7136161	10 pc.	100 pc.
20	7136201	10 pc.	100 pc.



TECEflex Eurocone screw connection 3/4" with TECEflex press connection made of standard brass*

Dimension	Item No.	DU 1	DU 2
16	763616	10 pc.	100 pc.
20	763620	10 pc.	100 pc.



TECEflex adapter screw connection with metallic sealing elements, standard brass

Adapter screw connection for hard copper pipes, standard brass.

Dimension	Item No.	DU 1	DU 2
16 x 15 mm Cu	713805	10 pc.	100 pc.
20 x 22 mm Cu	713806	10 pc.	100 pc.



TECE pipe connector 1/2" x 3/4" MT

Nickel-plated pipe connector 1/2" x 3/4" Eurocone to connect radiators.

Dimension	Item No.	DU 1	DU 2
1/2" x 3/4" EC	8740440	10 pc.	100 pc.



* The Eurocone is not subject to any standards and its use must be checked by the customer!

TECEflex – System components

TECEflex flush-mounted ball valve with handwheel, standard brass*

Flush-mounted ball valve for shutting off TECEflex pipes. Body and screw-in part made of standard brass in accordance with EN 12164. Spindle with two O-rings, providing better guiding of the spindle and double safety. Ball made of chrome-plated brass. Ball seal made of PTFE. Full penetration, therefore minimum loss of pressure.

Max. permanent operating pressure: 90 °C. Pressure rating: 10 bar

Design:

- TECEflex connection on both sides
- With covering anchor plate and handle (chrome-plated)
- With colour coding (red/blue)



Dimension	Item No.	DU 1	DU 2
16 x 16	751016	1 pc.	10 pc.
20 x 20	751020	1 pc.	10 pc.

TECEflex flush-mounted ball valve with dummy cap, standard brass*

Flush-mounted ball valve for shutting off TECEflex pipes. Body and screw-in part made of standard brass in accordance with EN 12164. Spindle with two O-rings, providing better guiding of the spindle and double safety. Ball made of chrome-plated brass. Ball seal made of PTFE. Full penetration, therefore minimum loss of pressure.

Max. permanent operating pressure: 90 °C. Pressure rating: 10 bar

Design:

- TECEflex connection on both sides
- With covering anchor plate and handle (chrome-plated)
- With colour coding (red/blue)



Dimension	Item No.	DU 1	DU 2
16 x 16	751116	1 pc.	10 pc.
20 x 20	751120	1 pc.	10 pc.

TECE flush-mounted extension, 23 mm

Flush-mounted extension 23 mm for concealed ball valves 1/2".

Dimension	Item No.	DU 1	DU 2
1/2"	8780200	1 pc.	20 pc.



TECE stainless steel heating circuit manifold without flow rate indicator

Stainless steel radiator distribution manifold made of stainless-steel rectangular hollow section 40 x 1.5 mm, (grade 1.4301) in accordance with EN 10088, G 1" union nut on primary side, flat sealing, nickel-plated brass, distance to heating circuit 50 mm.


Fully pre-assembled feed and return with:

- Manifold bar with integrated control valves and black protective caps, in accordance with EN 1264-4, outgoing side with pipe connectors on G 3/4" male thread, inside cone in accordance with EN 16313, nickel-plated brass
- Two blanking plugs G 3/4", nickel-coated brass

Packaged in a sturdy carton including:

- Two dual wall brackets 200 x 54.4 x 34.5 with structure-borne sound insulation inserts (DIN 4109) incl. mounting material (1 dual wall bracket for manifold with 2 heating circuits)
- Two flat seals 1"

Version	a	Item No.	DU 1
2 heating circuits	152 mm	7 12540	1 pc.
3 heating circuits	202 mm	7 12541	1 pc.
4 heating circuits	252 mm	7 12542	1 pc.
5 heating circuits	302 mm	7 12543	1 pc.
6 heating circuits	352 mm	7 12544	1 pc.
7 heating circuits	402 mm	7 12545	1 pc.
8 heating circuits	452 mm	7 12546	1 pc.
9 heating circuits	502 mm	7 12547	1 pc.
10 heating circuits	552 mm	7 12548	1 pc.
11 heating circuits	602 mm	7 12549	1 pc.
12 heating circuits	652 mm	7 12550	1 pc.

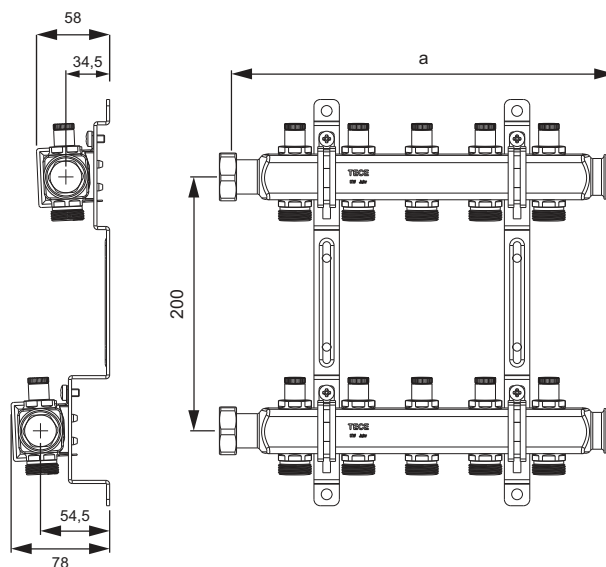

TECEflex – Manifolds

TECE stainless steel heating circuit manifold without flow rate indicator and control valves

Stainless steel radiator distribution manifold made of stainless-steel rectangular hollow section 40 x 1.5 mm (grade 1.4301) to EN 10088, with G 1" union nut on primary side, flat sealing, nickel plated brass, distance to heating circuit 50 mm.


Fully pre-assembled feed and return with:

- Manifold bar with pipe connectors on G 3/4" male thread, inside cone to EN 16313, nickel-plated brass
- Two blanking plugs G 3/4", nickel-plated brass
- Four blanking plugs G 1/2", nickel-plated brass

Packaged in a sturdy carton including:

- Two dual wall brackets 200 x 54.4 x 34.5 with structure-borne sound insulation inserts (DIN 4109) incl. mounting material (1 dual wall bracket for distributor with 2 heating circuits)
- Two flat seals 1"

Version	a	Item No.		DU 1
2 heating circuits	152 mm	712551	SALE	1 pc.
3 heating circuits	202 mm	712552	SALE	1 pc.
4 heating circuits	252 mm	712553	SALE	1 pc.
5 heating circuits	302 mm	712554	SALE	1 pc.
6 heating circuits	352 mm	712555	SALE	1 pc.
7 heating circuits	402 mm	712556	SALE	1 pc.
8 heating circuits	452 mm	712557	SALE	1 pc.
9 heating circuits	502 mm	712558	SALE	1 pc.
10 heating circuits	552 mm	712559	SALE	1 pc.
11 heating circuits	602 mm	712560	SALE	1 pc.
12 heating circuits	652 mm	712561	SALE	1 pc.

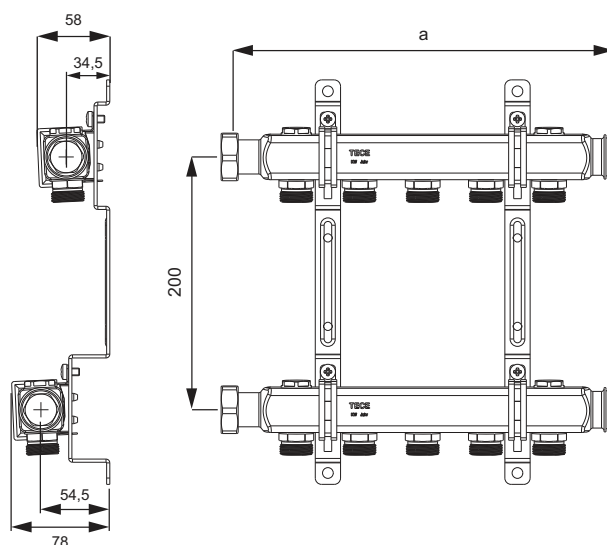

TECE fill and drain set with ventilation function 3/4" for TECE heating circuit manifold

Item No.		DU 1
712562	SALE	1 set



TECEflex manifold, silicon bronze

Manifold trunk 3/4"; one side with Rp 3/4"; female thread, other side with R 3/4"; male thread. TECEflex outlets dim. 16 without 3/4" cap and plug.

Dimension	Item No.	DU 1	DU 2
R 3/4" x Rp 3/4" x 16 Two-way	712201	1 pc.	12 pc.
R 3/4" x Rp 3/4" x 16 Three-way	712202	1 pc.	12 pc.



TECEflex manifold, standard brass

Manifold trunk, one side with Rp 3/4" female thread, other side with R 3/4" male thread, with TECEflex outlets dimension 16.

Dimension	Item No.	DU 1	DU 2
R 3/4" x Rp 3/4" x 16 Two-way	762201	1 pc.	12 pc.
R 3/4" x Rp 3/4" x 16 Three-way	762202	1 pc.	12 pc.



TECE universal manifold, with shut-off, standard brass

TECE manifold, valve with shut-off FT/MT, outlet 3/4" Eurocone.

Dimension	Item No.	DU 1	DU 2
3/4" x 3/4" EC Two-way	8730006	1 pc.	24 pc.
3/4" x 3/4" EC Three-way	8730007	1 pc.	24 pc.
1" x 3/4" EC Two-way	8730010	1 pc.	24 pc.
1" x 3/4" EC Three-way	8730011	1 pc.	24 pc.
1" x 3/4" EC four-way	8730040	1 pc.	12 pc.

**TECE double bracket for 3/4" and 1" manifold**

Robust bracket for mounting the 3/4" and 1" TECE manifold with sound insulation inserts.

Item No.	DU 1	DU 2
8730014	1 set	25 set



TECEflex – Gas installation



TECEflex – Gas installation

TECEflex can be used for domestic gas installations in Germany up to a pressure of 100 mbar. The certification applies for gases of the second and third Gas family (natural and liquefied gas). The regulations in accordance with the TRGI 2018 und der TRF 2021 apply for the installation. In addition, the regional building regulation as well as the regional fire protection regulations have to be observed for an expert installation. The national regulations, standards and worksheets as well as the accident prevention regulations and the recognised engineering rules also apply. The technical specification of TECEflex system shall have to be observed.

The following are available for gas installation:

- Metal fittings made of brass or silicon bronze
- Multi-layer composite pipes in yellow
- Gas safety valves specially devised for the TECEflex system with integrated type K gas flow monitor and thermal shut-off unit

Restrictions:

- No PPSU fittings may be used.
- Only the yellow multi-layer composite pipes may be used for gas installation. The use of plastic pipes or the white multi-layer composite pipes is not permitted.

TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT, yellow

Multi-layer composite pipe suitable for indoor gas installations. The regulations in accordance with TRGI 2018 and TRF 2021 shall apply for the installation.

Dimension	Item No.	DU 1	DU 2	DU 3
16 - Roll	732316	100 m	1000 m	2000 m
16 - Roll	732330	25 m	250 m	-
20 - Roll	732320	100 m	700 m	1400 m
20 - Roll	732331	25 m	250 m	-
25 - Roll	732325	50 m	250 m	500 m
25 - Roll	732332	25 m	250 m	-
32 - Roll	782032	25 m	125 m	-
16 - Rod	732416	100 m	-	-
20 - Rod	732420	70 m	-	-
25 - Rod	732425	45 m	-	-
32 - Rod	732432	30 m	-	-

(rod each 5 m)



TECEflex corrugated sheath pipe, yellow for 32 mm TECEflex multi-layer composite pipe

Yellow corrugated sheath pipe 32 mm for yellow TECEflex multi-layer composite pipe.

Dimension	Item No.	DU 1	DU 2
32 - Roll	782033	25 m	250 m



TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT, yellow, in yellow corrugated sheath pipe

Multi-layer composite pipe suitable for indoor gas installations. The regulations in accordance with TRGI 2018 and TRF 2021 shall apply for the installation.

Dimension	Item No.	DU 1	DU 2
16 - Roll	782016	50 m	500 m
20 - Roll	782020	50 m	350 m
25 - Roll	782025	25 m	150 m



TECEflex gas safety fitting, can be installed vertically upward or horizontally

Gas safety fitting, combines a thermal shut-off unit (TAE) with a type K gas flow detector in a metal housing. The fitting can be installed horizontally and vertically upright. Installation facing downward is not permitted. The safety has been tested in keeping with DVGW VP 305-1. One side with a parallel male thread to EN 10226-1 and on the other side with a TECEflex connection.

Dimension	Item No.	DU 1	DU 2
20 x R 1" GFG 2.5/TSO	750202	1 pc.	10 pc.
25 x R 1" GFG 2.5/TSO	750204	1 pc.	10 pc.
25 x R 1" GFG 4/TSO	750206	1 pc.	10 pc.
32 x R 1" GFG 4/TSO	750208	1 pc.	10 pc.
32 x R 1" GFG 6/TSO	750210	1 pc.	10 pc.



TECEflex – Accessories

TECEflex hygienic closure set in case

For closing pipe ends during the construction phase. Set consists of closures for female and male threads as well as for open pipe ends and nozzles. Packed in assortment case.

Set consisting of:

- 1 x closures for female thread Rp 1/2" to Rp 2"
- 1 x closures for male thread R 1/2" to R 2"
- 1 x closures for Flex nozzle dim. 16 to dim. 63
- 1 x closures for Flex pipe ends dim. 16 to dim. 63



Dimension	Item No.		DU 1	DU 2
16-63	720580	SALE	1 set	10 set

TECEflex hygienic closure female thread

For female thread from Rp 1/2" to Rp 2", refill pack.

Content consisting of:

- 30 x closures for female thread Rp 1/2"
- 25 x closures for female thread Rp 3/4"
- 10 x closures for female thread Rp 1"
- 10 x closures for female thread Rp 1 1/4"
- 8 x closures for female thread Rp 1 1/2"
- 6 x closures for female thread Rp 2"



Dimension	Item No.		DU 1	DU 2
Rp 1/2"-Rp 2"	720581	SALE	1 set	10 set

TECEflex hygienic closure male thread

For male thread from R 1/2" to R 2", refill pack.

Content consisting of:

- 30 x closures for male thread R 1/2"
- 25 x closures for male thread R 3/4"
- 10 x closures for male thread R 1"
- 10 x closures for male thread R 1 1/4"
- 8 x closures for male thread R 1 1/2"
- 6 x closures for male thread R 2"



Dimension	Item No.		DU 1	DU 2
R 1/2"-R 2"	720582	SALE	1 set	10 set

TECEflex hygienic closure nozzle

For nozzles of dim. 16-63, refill pack.

Content consisting of:

- 30 x closures for nozzle dim. 16
- 25 x closures for nozzle dim. 20
- 10 x closures for nozzle dim. 25
- 10 x closures for nozzle dim. 32
- 10 x closures for nozzle dim. 40
- 8 x closures for nozzle dim. 50
- 6 x closures for nozzle dim. 63



Dimension	Item No.		DU 1	DU 2
16-63	720583	SALE	1 set	10 set

TECEflex hygienic closure pipe

For open pipe ends of dim. 16-63, refill pack.

Content consisting of:

- 30 x closures for pipe end dim. 16
- 25 x closures for pipe end dim. 20
- 10 x closures for pipe end dim. 25
- 10 x closures for pipe end dim. 32
- 10 x closures for pipe end dim. 40
- 8 x closures for pipe end dim. 50
- 6 x closures for pipe end dim. 63



Dimension	Item No.		DU 1	DU 2
16-63	720584	SALE	1 set	10 set

TECE pipe clip made of polyamide, white

One-piece pipe clip made of white polyamide. Pipe clip closes when pipe is pressed in. Thanks to patented lateral guides, two or more clips can be joined together.

Note:

Not permitted for gas installation!



Dimension	Item No.	DU 1	DU 2
14	785036	100 pc.	2000 pc.
16	785037	100 pc.	2000 pc.
20	785038	50 pc.	1000 pc.
25	785039	50 pc.	1000 pc.
32	785040	50 pc.	1000 pc.
40	785041	25 pc.	250 pc.

TECE wrap-around tape assembly

Co-extruded three-layer tape for protecting TECE installation pipe connections against external corrosion influences.

Length 12.5 m, width 30 mm, thickness 1 mm



Item No.	DU 1	DU 2
720579	12.5 m	225 m

TECE pipe bend guides

Pipe bend guides made of plastic, to guide pipes out of the screed.



Dimension	Item No.	DU 1	DU 2
14-17 mm	77910010	25 pc.	200 pc.
18-20 mm	77910011	25 pc.	100 pc.
25 mm	77910012	25 pc.	100 pc.

TECEflex – Tools

TECEflex manual pipe expanding tool, type: RAZ-V

To expand TECEflex PE-X and composite pipes dim. 16-32.

Consisting of:

- Pipe expanding tool, manual
- Expanding heads dim. 16-32
- Robust tool case



Dimension	Item No.	DU 1
16-32	720056	1 pc.

TECEflex manual pressing tool for pressure sleeve, type: HPW-L

For sliding on and pressing TECEflex pressure sleeves.

Consisting of:

- Manual pressing tool
- Fork heads dim. 14-32
- Robust tool case



Dimension	Item No.	DU 1
14-32	720050	1 pc.

TECEflex manual tool set

Consisting of:

- TECEflex manual pipe expanding tool
- Expanding heads dim. 16-32
- Manual pressing tool for TECEflex pressure sleeves
- Fork heads dim. 14-32
- Robust tool case



Dimension	Item No.	DU 1
16-32	720203	1 set
16-20	720204	1 set

TECEflex RazFaz compact accumulator-operated expanding tool

NEW

Light-weight and easy-to-handle tool for electric expanding of TECEflex pipes dim. 16-32.

Consisting of:

- RazFaz cordless expanding tool
- Expanding heads dim. 16-32
- Powerful lithium-ion battery
- Fast battery charger
- Robust tool case



Dimension	Item No.	DU 1
16-32	720240	NEW 1 pc.

TECEflex RazFaz compact accumulator-operated pressing tool **NEW**

Light-weight and easy-to-handle pressing tool for dimensions from 14-32 mm. Permits rational working even in narrow mounting situations or pressing directly on the wall.

Consisting of:

- RazFaz cordless pressing tool
- Double pressing forks dim. 14/16-20 and 25-32
- Powerful lithium-ion battery
- Fast battery charger
- Robust tool case



Dimension	Item No.		DU 1
14-32	720241	NEW	1 pc.

TECEflex RazFaz compact tool set **NEW**

Consisting of:

- RazFaz compact accumulator-operated expanding tool
- RazFaz compact accumulator-operated pressing tool
- Expanding heads dim. 16-32
- Double pressing forks dim. 14/16-20 and 25-32
- 2 x lithium-ion battery
- Fast battery charger
- Robust tool case



Dimension	Item No.		DU 1
16-32	720242	NEW	1 pc.

TECEflex – Tools

TECEflex PMA 40 63 pressing tool and TECEflex expanding set in tool case

Pressing machine attachment for the mechanical pressing of TECEflex connections dim. 40-63. A standard commercial press machine with 32 kN pressure is required to use the tool.

Consisting of:

- Pressing machine attachment PMA 40 63
- Pressing forks dim. 40-63
- Expanding tool AWS 40 63 for pressing machines
- Expanding heads dim. 40-63
- Robust tool case



Dimension	Item No.	DU 1
40-63	720170	1 set

TECEflex expanding head for AWS 40 63

For the expanding tool AWS 40 63 of the PMA 40 63 set for TECEflex pipes dim. 25 and 32.



Dimension	Item No.	DU 1
25 and 32	720128	1 pc.

TECE bending machine dimension 16-32 mm

Compact, one-hand pipe bender, dimension 16-32 mm for TECEflex and TECElogo multi-layer composite pipes to produce consistent pipe bends. Complete with case, with matrices for 16/20/25/32 mm. Bending angle 0-90°.



Item No.	DU 1
720222	1 pc.

TECE bending machine dimension 40-63 mm

Manually operated hydraulic bending machine for TECEflex and TECElogo multi-layer composite pipes, dimensions 40-63 mm for use on-site or prefabrication. Complete with wooden box, with matrices for 40/50/63 mm. Bending angle 0-90°.



Item No.	DU 1
720223	1 pc.

TECEflex pipe cutter

Caution: Use the pipe cutter to cut TECEflex pipes only!

Dimension	Item No.	DU 1
14-25	720005	1 pc.
14-40	720093	1 pc.

**TECE pipe cutter**

Dimension	Item No.	DU 1
14-63	8760008	1 pc.

**TECE corrugated sheath pipe cutter**

For corrugated sheath pipe 14-25 mm.

Dimension	Item No.	DU 1
14-25	720090	1 pc.

**TECEflex calibrator**

For TECEflex pipes of dimensions 14, 16 and 20. For the assembly of TECEflex clamped joint.

Dimension	Item No.	DU 1	DU 2
14-20	720040	10 pc.	100 pc.

**TECE laying winder**

Laying winder, foldable, variably adjustable for TECEfloor, TECEflex and TECElogo rolls up 600 m length.

Dimension	Item No.	DU 1
up to 600 m	720193	1 pc.

**TECE pipe straightener**

To be mounted on the laying winder for straight removal of 16 and 20 mm TECEflex and TECElogo composite pipes.

Dimension	Item No.	DU 1
16 and 20	720194	1 pc.



TECEflex – Starter set

TECEflex starter set silicon bronze/PPSU

Plastic assortment case with standard parts from the TECEflex range, threaded components made of silicon bronze.


Pos.	Item No.	Designation	Quantity
1	734516	Pressure sleeve composite pipe 16	100
2	705102	Female connector 16 x Rp 1/2"	10
3	708610	Wall disk 16 x Rp 1/2"	10
4	705601	Male connector 16 x R 1/2"	10
5	730916	Tee 16 x 16 x 16	10
6	737016	Elbow 90° 16 x 16	10
7	736016	Coupling 16 x 16	10

Dimension	Item No.	SALE	DU 1
16	700004	SALE	1 pc.




TECE Seal System assembly plug with sealing sleeve

Pos.	Item No.	Designation	DU 1
1	704808	O-ring for assembly plug 1/2"	10 pc.
	704814	O-ring for assembly plug 3/4"	10 pc.




TECEflex flush-mounted ball valve with handwheel, standard brass

Pos.	Item No.	Designation	DU 1
1	8780000	Handwheel	1 pc.




TECEflex flush-mounted ball valve with dummy cap, standard brass

Pos.	Item No.	Designation	DU 1
1	8780100	Dummy cap	1 pc.




720056 – TECEflex manual pipe expanding tool, type: RAZ-V

Pos.	Item No.	Designation	DU 1
1	720041	Expanding head V 14 mm	1 pc.
2	720042	Expanding head V 16 mm	1 pc.
3	720043	Expanding head V 20 mm	1 pc.
4	720045	Expanding head V 25 mm	1 pc.
5	720046	Expanding head V 32 mm	1 pc.
6	720095	Spare mandrel for RAZ-V	1 pc.
7	720202	Tool case for TECEflex manual tools	1 pc.

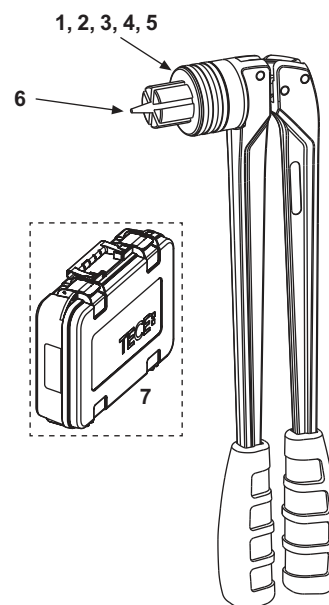

TECEflex – Spare parts


720050 – TECEflex manual pressing tool for pressure sleeve, type: HPW-L

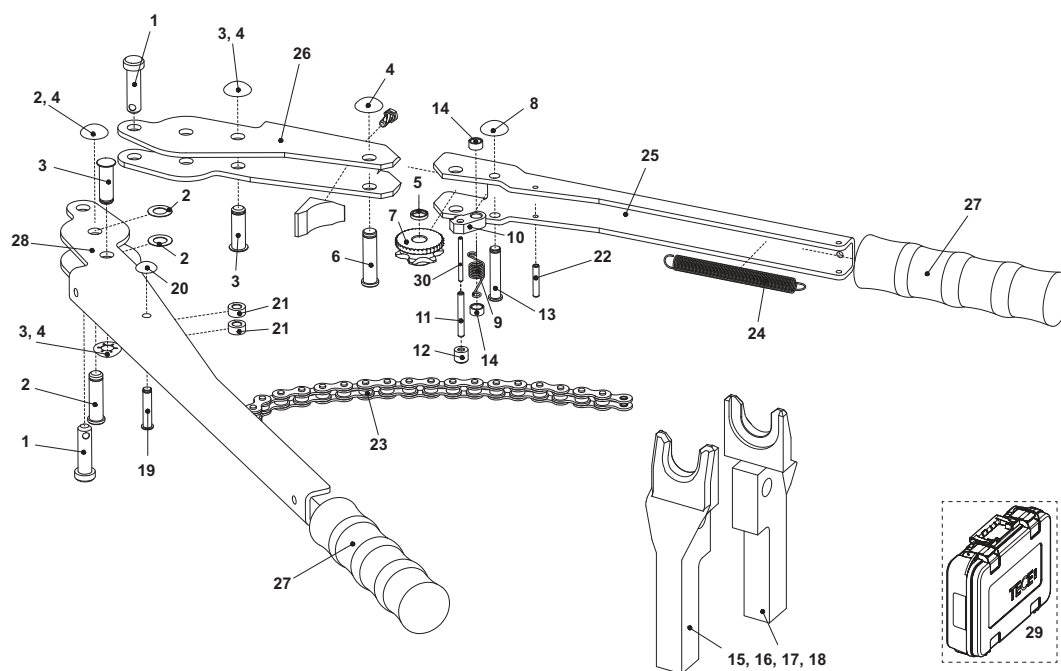

Pos.	Item No.	Designation	DU 1
1	720064	Retaining bolts for fork heads	1 pc.
2	720048	Central bolt including retaining ring	1 pc.
3	720072	Fork connection bolt including retaining ring	1 pc.
4	720096	Retaining ring for central, fork connection and sprocket bolts	1 pc.
5	720169	Spacer ring for sprocket bolts	1 pc.
6	720097	Bolt for sprocket	1 pc.
7	720158	Sprocket	1 pc.
8	720069	Retaining ring for pawl	1 pc.
9	720060	Hinge spring for pawl	1 pc.
10	720110	Pawl	1 pc.
11	720165	Sleeve for pawl	1 pc.
12	720166	Cap	1 pc.
13	720160	Bolt for pawl	1 pc.
14	720168	Spacer ring for pawl	1 pc.
15	720061	Yoke set 14/16 mm	1 pc.
16	720062	Yoke set 20 mm	1 pc.
17	720063	Yoke set 25 mm	1 pc.
18	720079	Yoke set 32 mm	1 pc.
19	720066	Chain pin	1 pc.
20	720067	Circlip for chain pin	1 pc.
21	720161	Spacer ring for sprocket bolts	1 pc.
22	720162	Spring pin for hinge spring	1 pc.
23	720102	Roller chain	1 pc.
24	720091	Tensioning spring for roller chain	1 pc.
	720115	Conversion set to replace tensioning spring (until 06/2001) with hinge spring (from 07/2001)	1 pc.
25	720157	Handle, long	1 pc.
26	720156	Handle, short	1 pc.
27	720153	Protective handle	1 pc.
28	720150	Handle	1 pc.
29	720202	Tool case for TECEflex manual tools	1 pc.
30	720167	Spring pin for pawl	1 pc.


720172 – TECEflex RazFaz accumulator-operated expanding tool

Pos.	Item No.	Designation	DU 1
1	720041	Expanding head V 14 mm	1 pc.
	720042	Expanding head V 16 mm	1 pc.
	720043	Expanding head V 20 mm	1 pc.
	720045	Expanding head V 25 mm	1 pc.
	720046	Expanding head V 32 mm	1 pc.
2	720210	Li-Ion rechargeable battery 3.0 Ah for RazFaz tools (from 2014, red tools)	1 pc.
3	720175	NiMh spare rechargeable battery 3.0 Ah for RazFaz devices (until 2014, black tools)	1 pc.
4	720211	Charger for RazFaz devices (from 2014, red tools)	1 pc.
5	720179	Charger for RazFaz tools (until 2014, black tools)	1 pc.
6	720212	Tool case for RazFaz tools	1 pc.

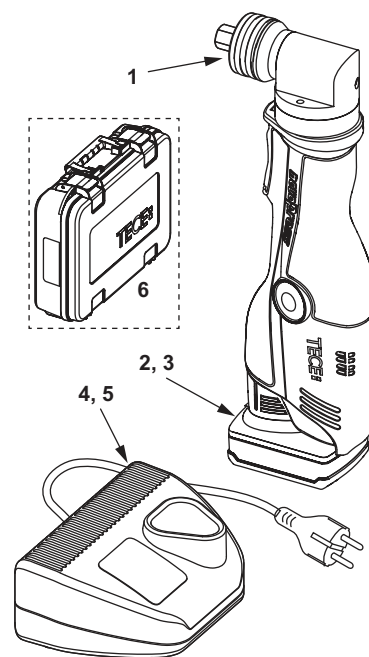

720240 – TECEflex RazFaz compact accumulator-operated expanding tool


Pos.	Item No.	Designation	DU 1
1	720042	Expanding head V 16 mm	1 pc.
2	720043	Expanding head V 20 mm	1 pc.
3	720045	Expanding head V 25 mm	1 pc.
4	720046	Expanding head V 32 mm	1 pc.
5	720237	Li-Ion battery 2.0 Ah for RazFaz compact units	NEW 1 pc.
6	720211	Charger for RazFaz devices (from 2014, red tools)	1 pc.
7	720236	Tool case empty for RazFaz compact units	NEW 1 pc.

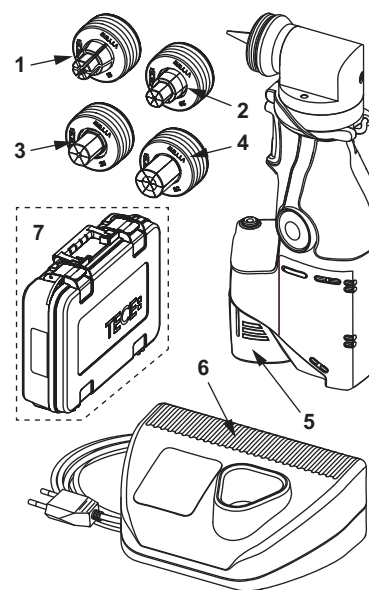

TECEflex – Spare parts


720173 – TECEflex RazFaz accumulator-operated pressing tool

Pos.	Item No.	Designation	DU 1
1	720205	RazFaz pressing forks 14/16-20 front	1 pc.
2	720206	RazFaz pressing forks 14/16-20 rear	1 pc.
3	720207	RazFaz pressing forks 25-32 front	1 pc.
4	720208	RazFaz pressing forks 25-32 rear	1 pc.
5	720235	Replacement bolt for TECEflex RazFaz battery pressing tool NEW	1 pc.
6	720210	Li-Ion rechargeable battery 3.0 Ah for RazFaz tools (from 2014, red tools)	1 pc.
7	720175	NiMh spare rechargeable battery 3.0 Ah for RazFaz devices (until 2014, black tools)	1 pc.
8	720211	Charger for RazFaz devices (from 2014, red tools)	1 pc.
9	720179	Charger for RazFaz tools (until 2014, black tools)	1 pc.
10	720212	Tool case for RazFaz tools	1 pc.

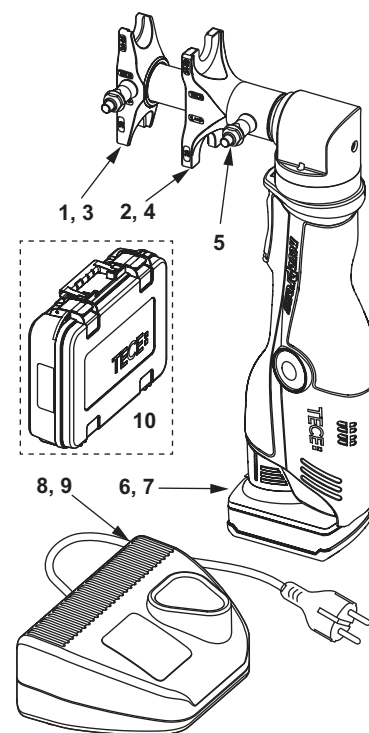


720241 – TECEflex RazFaz compact accumulator-operated pressing tool

Pos.	Item No.	Designation	DU 1
1	720205	RazFaz pressing forks 14/16-20 front	1 pc.
2	720206	RazFaz pressing forks 14/16-20 rear	1 pc.
3	720207	RazFaz pressing forks 25-32 front	1 pc.
4	720208	RazFaz pressing forks 25-32 rear	1 pc.
5	720235	Replacement bolt for TECEflex RazFaz battery pressing tool NEW	1 pc.
6	720237	Li-Ion battery 2.0 Ah for RazFaz compact units NEW	1 pc.
7	720211	Charger for RazFaz devices (from 2014, red tools)	1 pc.
8	720236	Tool case empty for RazFaz compact units NEW	1 pc.

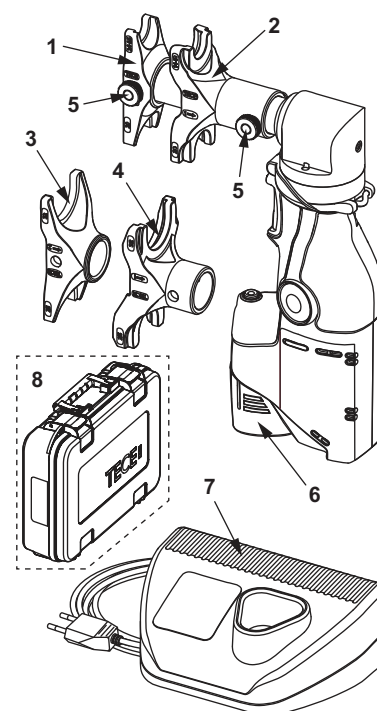


720170 – TECEflex PMA 40 63 pressing tool and TECEflex expanding set in tool case

Pos.	Item No.	Designation	DU 1
1	720213	PMA 40 63 pressing forks 40 mm fitting	1 pc.
2	720214	PMA 40 63 pressing forks 40 mm sleeve	1 pc.
3	720215	PMA 40 63 pressing forks 50 mm fitting	1 pc.
4	720216	PMA 40 63 pressing forks 50 mm sleeve	1 pc.
5	720217	PMA 40 63 pressing forks 63 mm fitting	1 pc.
6	720218	PMA 40 63 pressing forks 63 mm sleeve	1 pc.
7	720219	PMA 40 63 expanding head 40 mm	1 pc.
8	720220	PMA 40 63 expanding head 50 mm	1 pc.
9	720221	PMA 40 63 expanding head 63 mm	1 pc.

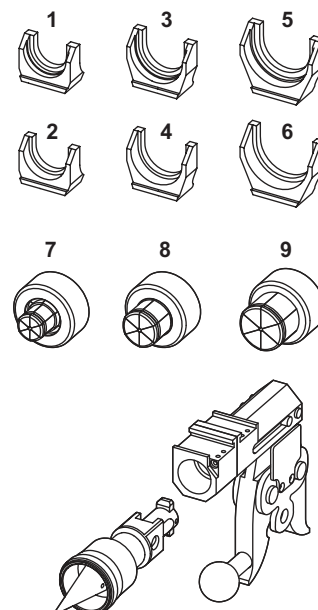

8760008 – TECE pipe cutter

Pos.	Item No.	Designation	DU 1
1	8760009	Replacement cutting wheel for pipe cutter	1 pc.



TECEflex – Technical pipe data

TECEflex system pipes	Composite pipes							
Pipe designation	PE-Xc/Al/PE-RT							
Dimension	14	16	20	25	32	40	50	63
Delivery length – roll in m	120	100	100	50	25	-	-	-
Ready-cut pipes in m (5 m/pipe)	-	100	70	45	30	15	15	5
Field of application*	HKA, FBH, DLA	TWA, HKA, FBH, DLA, GAS		TWA, HKA, DLA, GAS				
Application class/ operating pressure	2/10 bar 5/10 bar							
Colour	white	white yellow						
Outside diameter in mm	15	17	21	26	32	40	50	63
Wall thickness in mm	2.60	2.75	3.45	4.00	4.00	4.00	4.50	6.00
Inside diameter in mm	9.8	11.5	14.1	18	24	32	41	51
Available in corrugated protective pipe	yes				-			
Available with insulation λ = 0.040 W/(mK) - 6 mm - 9 mm - 13 mm - 26 mm	-- -- -- --	yes yes yes yes			-- -- -- --			
Pipe weight empty in kg/m	0.11	0.14	0.21	0.30	0.40	0.53	0.80	1.29
Internal volume in dm³/m	0.08	0.10	0.16	0.25	0.45	0.80	1.32	2.04
Pipe roughness in mm	0.007							
Thermal conductivity uninsulated in W/(m²K)	0.35							
Coefficient of thermal expansion in mm/(mK)	0.026							
Minimum bending radius in mm (5 x dimension)	70	80	100 (80)**	125	160	200	250	315

* TWA - potable water systems; HKA - radiator connection; FBH - floor heating; DLA - compressed air systems; GAS - gas installation
The classification of the application classes corresponds to the information in ISO 10508[4].

** Pipes of dimension 20 can also be bent with 4 times the dimension.

TECEflex system pipes	PE-Xc 5S universal pipe in accordance with EN ISO 15875		PE-Xa 5S universal pipe in accordance with EN ISO 21003		
Pipe designation	PE-Xc 5S		PE-Xa 5S		
Dimension	16	20	16	20	25
Delivery length – roll in m	200	120	100	100	50
Ready-cut pipes in m (5 m/pipe)	--	--	--	--	--
Field of application*	TWA,FBH, HKA, DLA		TWA,FBH, HKA, DLA		
Application class/operating pressure	2/10 bar 5/6 bar		2/10 bar 5/10 bar		
Colour	silver		white		
Outside diameter in mm	16	20	16	20	25
Wall thickness in mm	2.2	2.8	2.2	2.8	3.5
Inside diameter in mm	11.6	14.4	11.6	14.4	18
Available in corrugated protective pipe	yes		--		
Lieferbar mit Dämmung $\lambda = 0,040 \text{ W/(m} \cdot \text{K)}$ - 6 mm - 9 mm - 13 mm	-- -- --		-- -- --		
Pipe weight empty in kg/m	0.09	0.14	0.09	0.14	0.22
Internal volume in dm ³ /m	0.11	0.16	0.11	0.16	0.25
Pipe roughness in mm	0.007		0.007		
Thermal conductivity uninsulated in W/(m ² K)	0.35		0.35		
Coefficient of thermal expansion in mm/(mK)	0.2		0.2		
Minimum bending radius in mm (5 x dimension)	80	100	80	100	125


* TWA – potable water system; HKA – radiator connection; FBH – floor heating; DLA - compressed air systems
The classification of the application classes corresponds to the information in ISO 10508[4].

TECEflex – Technical pipe data

TECEflex system pipes	PE-Xc potable water pipes in accordance with DIN 16892			PE-Xc heating pipe in accordance with DIN 4726		
Pipe designation	PE-Xc			PE-Xc		
Dimension	16	20	25	16	20	25
Delivery length – roll in m	50	50	50	120	75	75
Ready-cut pipes in m (5 m/pipe)	-	-	-	-	-	-
Field of application*	TWA			FBH, HKA		
Application class/operating pressure	2/10 bar			5/6 bar		
Colour	mother of pearl			silver		
Outside diameter in mm	16	20	25	16	20	25
Wall thickness in mm	2.2	2.85	3.5	2.0	2.8	3.5
Inside diameter in mm	11.6	14.3	18	12	14.4	18.0
Available in corrugated protective pipe	-			-		
Lieferbar mit Dämmung $\lambda = 0,040 \text{ W/(m} \cdot \text{K)}$ - 6 mm - 9 mm - 13 mm	-- -- --			-- -- --		
Pipe weight empty in kg/m	0.09	0.14	0.22	0.08	0.14	0.22
Internal volume in dm ³ /m	0.11	0.16	0.25	0.11	0.16	0.25
Pipe roughness in mm	0.007			0.007		
Thermal conductivity uninsulated in W/(m ² K)	0.35			0.35		
Coefficient of thermal expansion in mm/(mK)	0.2			0.2		
Minimum bending radius in mm (5 x dimension)	80	100	125	80	100	125

* TWA – potable water system; HKA – radiator connection; FBH – floor heating; DLA - compressed air systems
The classification of the application classes corresponds to the information in ISO 10508[4].

Application limits of fittings made of standard brass for drinking water installations

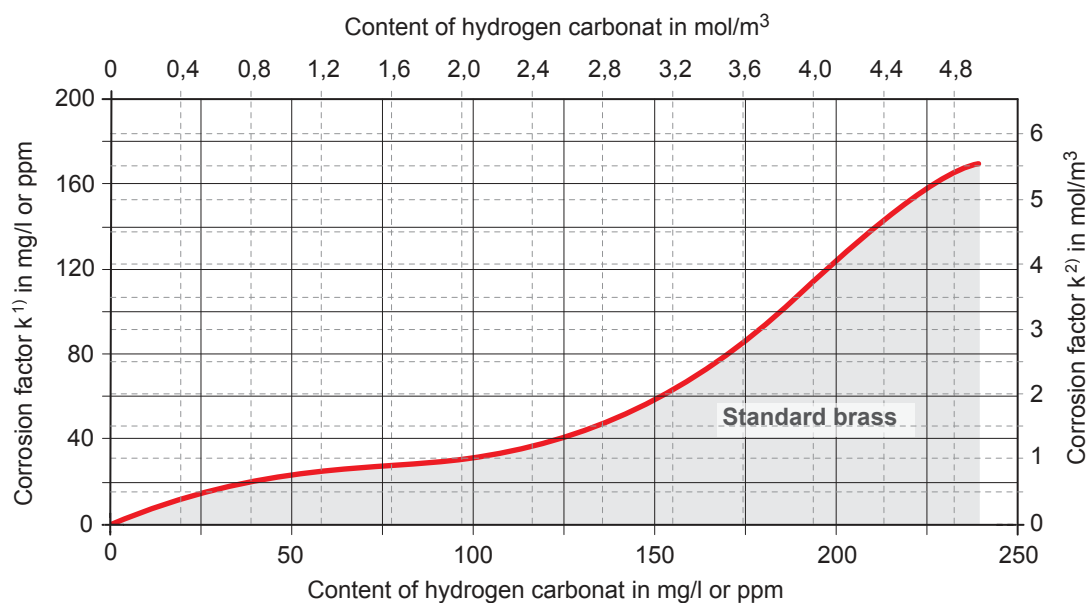

¹) k = content of chlorid Cl + 1/3 content of sulphate SO₄ (in mg/l)

²) k = content of chlorid Cl + content of sulphate SO₄ (in mol/m³)

For water qualities that are above the limit curve, dezincification corrosion for standard brass is to be expected. They must not be used for these water qualities.

Application classes and classification of operating conditions in accordance with ISO 10508

Application class	Calculated temperature T _D °C	Operating duration ^b at T _D Years ^a	T _{max} °C	Operating duration at T _{max} Years	T _{mal} °C	Operating duration at T _{mal} Hours	Typical application area
1 ^a	60	49	80	1	95	100	Hot water supply (60 °C)
2 ^a	70	49	80	1	95	100	Hot water supply (70 °C)
3 ^c	20	0.5	50	4.5	65	100	Low-temperature floor heating
	30	20					
	40	25					
4 ^b	20	2.5	70	2.5	100	100	Floor heating and low-temperature radiator connection
	40	20					
	60	25					
5 ^b	20	14	90	1	100	100	High-temperature radiator connection
	60	25					
	80	10					

T_D = temperature for which the pipe system is designed. T_{max} = maximum temperature, which can occur for a short period.

T_{mal} = highest maximum temperature, which can occur briefly in the event of a fault (maximum of 100 hours in 50 years).


^a A country can select either class 1 or class 2 in accordance with its national regulations.

^b For an application class, if more than one calculated temperature results for the operating period and its temperature, the associated times for the operating period should be added. "Plus cumulative" in the table implies a temperature combination of the specified temperature for an operating duration (e.g. the temperature combination for a duration of 50 years for class 5 comprises: 20 °C over 14 years, followed by 60 °C over 25 years, followed by 80 °C over 10 years, followed by 90 °C over 1 year, followed by 100 °C over 100 h).

^c Only permitted if the temperature during a fault cannot rise above 65 °C.


TECEflex – Dimensional drawings

TECEflex female connector




Dimension	Silicon bronze				Standard brass			
	Item No.	Z1	L1	SW	Item No.	Z1	L1	SW
16 x Rp 1/2"	705102	13	43	25	765002	13	43	27
20 x Rp 1/2"	705103	12	45	25	765003	13	45	27
20 x Rp 3/4"	705104	13	46	31	765004	15	48	32
25 x Rp 1"	705106	15	58	38	765009	15	58	40
25 x Rp 3/4"	705105	15	54	31	765007	16	56	32
32 x Rp 1"	705107	16	67	38	765008	16	67	40
40 x Rp 1 1/2"	705108	20	75	53	765010	20	75	56
50 x Rp 2"	705109	24	88	67	-	-	-	-
63 x Rp 2"	705110	22	94	67	-	-	-	-

TECEflex male connector




Dimension	Silicon bronze				Standard brass			
	Item No.	Z1	L1	SW	Item No.	Z1	L1	SW
16 x R 1/2"	705601	18	46	21	765502	18	46	21
16 x R 3/4"	705602	18	47	27	765506	18	47	27
16 x R 3/8"	-	-	-	-	765514	18	44	22
20 x R 1/2"	705603	18	48	21	765503	18	48	21
20 x R 3/4"	705604	18	49	27	765504	18	49	17
25 x R 1"	705606	22	62	34	765508	22	63	24
25 x R 3/4"	705605	21	59	27	765507	19	57	22
32 x R 1"	705607	23	71	34	765509	25	73	34
32 x R 1 1/4"	705608	25	75	42	765510	25	75	43
40 x R 1 1/4"	705609	28	81	42	765511	28	81	43
50 x R 1 1/2"	705610	29	89	48	765512	30	88	48
63 x R 2"	705611	28	100	60	765513	30	99	60

TECEflex coupling



Dimension	Silicon bronze			PPSU			Standard brass		
	Item No.	Z1	L1	Item No.	Z1	L1	Item No.	Z1	L1
14 x 14	720594	14	43	-	-	-	-	-	-
16 x 16	706216	14	43	736016	15	48	766016	14	43
20 x 20	706220	14	48	736020	16	53	766020	14	48
25 x 25	706225	17	64	736025	16	64	766025	17	64
32 x 32	706232	19	81	736032	24	81	766032	19	81
40 x 40	706240	24	91	736040	28	91	766040	24	91
50 x 50	706250	26	103	-	-	-	766050	26	103
63 x 63	706263	28	118	-	-	-	766063	28	118


TECEflex coupling reduced



Dimension	Silicon bronze			PPSU			Standard brass		
	Item No.	Z1	L1	Item No.	Z1	L1	Item No.	Z1	L1
16 x 14	720595	14	43	-	-	-	-	-	-
20 x 16	706603	14	45	736503	15	50	766503	14	45
25 x 16	706604	15	53	736504	15	56	766504	15	53
25 x 20	706605	15	56	736505	16	58	766505	15	56
32 x 20	706606	16	64	736506	23	70	766506	16	64
32 x 25	706607	18	72	736507	23	75	766507	18	72
40 x 32	706608	22	87	736508	27	87	766508	22	87
50 x 40	706609	25	97	-	-	-	766509	25	97
63 x 50	706610	26	110	-	-	-	-	-	-

TECEflex – Dimensional drawings


TECEflex 90° elbow

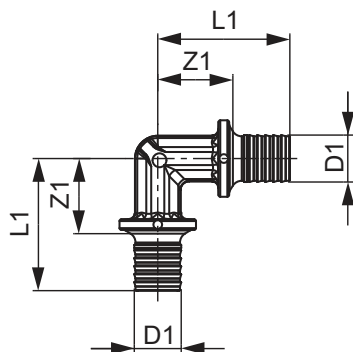


Dimension	PPSU			Standard brass		
	Item No.	Z1	L1	Item No.	Z1	L1
16 x 16	737016	22	38	767016	23	38
20 x 20	737020	24	43	767020	25	42
25 x 25	737025	28	52	767025	30	54
32 x 32	737032	35	64	767032	35	66
40 x 40	737040	41	73	767040	38	73
50 x 50	-	-	-	767050	45	84
63 x 63	-	-	-	767063	53	99

TECEflex 90° elbow pressure-loss optimised, silicon bronze

Dimension	Item No.	Z1	L1
16 x 16	707316	26	41
20 x 20	707320	28	45
25 x 25	707325	33	57
32 x 32	707332	39	70
40 x 40	707340	49	82
50 x 50	707350	55	93
63 x 63	707363	61	107
14 x 14	720593	26	41

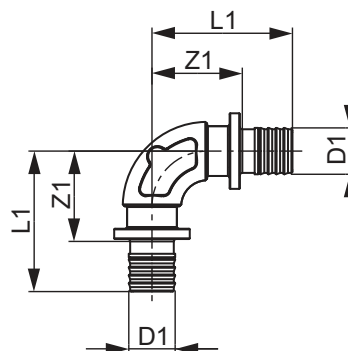


TECEflex 45° elbow

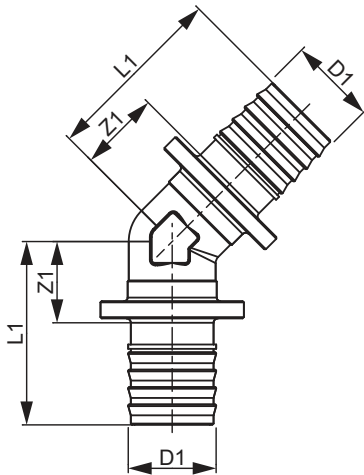

Dimension	Silicon bronze			Standard brass		
	Item No.	Z1	L1	Item No.	Z1	L1
25 x 25	707167	19	42	767125	19	42
32 x 32	707168	22	53	767132	22	53
40 x 40	707169	22	56	767140	22	56
50 x 50	707165	25	64	-	-	-
63 x 63	707166	29	74	-	-	-


TECEflex female elbow



Dimension	Silicon bronze					Standard brass				
	Item No.	Z1	Z2	L1	L2	Item No.	Z1	Z2	L1	L2
16 x Rp 1/2"	708101	26	16	41	31	768016	26	16	41	31
20 x Rp 1/2"	708102	26	18	43	33	768020	26	18	43	33
20 x Rp 3/4"	708103	29	23	46	40	768002	29	23	46	40
25 x Rp 3/4"	708104	31	24	54	40	768025	31	24	54	40
32 x Rp 1"	708105	36	25	67	45	768032	36	25	67	45
40 x Rp 1 1/2"	708106	45	29	78	50	-	-	-	-	-
50 x Rp 1 1/2"	708107	46	31	84	52	-	-	-	-	-

TECEflex – Dimensional drawings


TECEflex male elbow




Dimension	Silicon bronze					Standard brass				
	Item No.	Z1	Z2	L1	L2	Item No.	Z1	Z2	L1	L2
16 x R 1/2"	707801	23	24	37	37	767516	23	24	37	37
20 x R 1/2"	707802	23	26	40	39	767520	23	26	40	39
20 x R 3/4"	707803	25	26	42	40	767501	25	26	42	40
25 x R 1"	707805	31	43	55	60	767526	31	43	55	60
25 x R 3/4"	707804	27	30	51	45	767525	27	30	51	45
32 x R 1"	707806	32	39	63	56	767532	32	39	63	56

TECEflex compact angled connector, silicon bronze

Dimension	Item No.	Z1	Z2	L1	L2
16 x Rp 1/2"	708100	30	8	45	19




TECEflex tee female thread

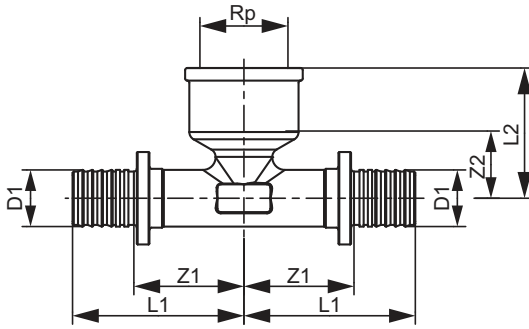

	Silicon bronze					Standard brass				
Dimension	Item No.	Z1	Z2	L1	L2	Item No.	Z1	Z2	L1	L2
16 x Rp 1/2" x 16	709801	26	16	41	31	769516	26	16	41	31
20 x Rp 1/2" x 20	709802	26	18	43	33	769520	26	18	43	33
25 x Rp 1/2" x 25	709803	28	10	51	25	769522	28	10	51	25
25 x Rp 3/4" x 25	709804	31	23	54	40	769525	31	23	54	40
32 x Rp 1/2" x 32	-	-	-	-	-	769527	29	7	60	22
32 x Rp 1" x 32	709805	35	26	66	45	769532	35	26	66	45
40 x Rp 1/2" x 40	-	-	-	-	-	769534	30	10	64	26
40 x Rp 1" x 40	709806	37	28	70	48	769540	37	28	70	48
40 x Rp 3/4" x 40	709809	33	15	67	30	-	-	-	-	-
50 x Rp 1 1/4" x 50	709807	43	33	82	55	-	-	-	-	-
50 x Rp 3/4" x 50	709810	34	19	73	35	-	-	-	-	-
63 x Rp 1 1/2" x 63	709808	53	31	99	52	-	-	-	-	-
63 x Rp 3/4" x 63	709811	53	30	99	43	-	-	-	-	-


TECEflex tee

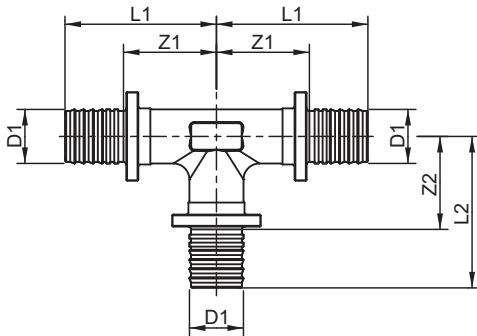

	Silicon bronze					PPSU					Standard brass				
Dimension	Item No.	Z1	Z2	L1	L2	Item No.	Z1	Z2	L1	L2	Item No.	Z1	Z2	L1	L2
14 x 14 x 14	720591	24	24	39	39	-	-	-	-	-	-	-	-	-	-
16 x 16 x 16	710116	23	23	38	38	730916	17	22	34	38	760016	23	23	38	38
20 x 20 x 20	710120	25	25	42	42	730920	19	25	38	43	760020	25	25	42	42
25 x 25 x 25	710125	30	30	54	54	730925	24	28	48	52	760025	30	30	54	54
32 x 32 x 32	710132	35	35	66	66	730932	34	34	64	64	760032	35	35	66	66
40 x 40 x 40	710140	39	39	73	73	730940	41	41	73	73	760040	39	39	73	73
50 x 50 x 50	710150	45	45	84	84	-	-	-	-	-	-	-	-	-	-
63 x 63 x 63	710163	54	54	99	99	-	-	-	-	-	-	-	-	-	-


TECEflex – Dimensional drawings

TECEflex tee reduced

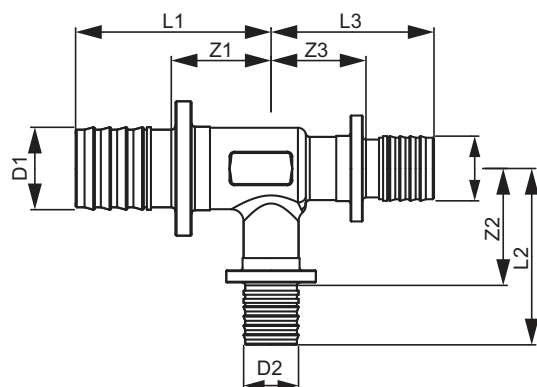

Dimension	Silicon bronze							PPSU							Standard brass						
	Item No.	Z1	Z2	Z3	L1	L2	L3	Item No.	Z1	Z2	Z3	L1	L2	L3	Item No.	Z1	Z2	Z3	L1	L2	L3
16 x 14 x 16	720592	24	24	24	39	39	39	-	-	-	-	-	-	-	-	-	-	-	-	-	-
16 x 20 x 16	710601	25	23	25	40	40	40	730504	19	22	19	35	41	35	760504	25	23	25	40	40	40
20 x 16 x 16	710602	23	25	23	40	40	38	730508	22	24	22	41	40	38	760508	23	25	23	40	40	38
20 x 16 x 20	710603	23	25	23	40	40	40	730509	22	24	22	40	40	40	760509	23	25	23	40	40	40
20 x 20 x 16	710604	25	25	25	42	42	40	730511	19	24	19	38	43	35	760511	25	25	25	42	42	40
20 x 25 x 20	710609	29	27	29	46	50	46	730521	21	24	21	40	48	40	760521	29	27	29	46	50	46
25 x 16 x 16	-	-	-	-	-	-	-	730516	22	27	22	46	44	38	760516	25	29	23	48	43	38
25 x 16 x 20	710605	25	29	23	48	43	40	730544	22	27	22	46	44	41	760544	25	29	23	48	43	40
25 x 16 x 25	710606	25	29	29	48	43	48	730514	22	27	22	46	44	46	760514	25	29	29	48	43	48
25 x 20 x 20	710607	27	29	25	50	46	42	730522	19	28	19	43	46	38	760522	27	29	25	50	46	42
25 x 20 x 25	710608	27	29	27	50	46	50	730515	19	28	19	43	46	43	760515	27	29	27	50	46	50
25 x 32 x 25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	760517	34	31	34	57	62	57
32 x 16 x 32	710610	26	32	26	57	47	57	730537	26	31	26	55	47	55	760537	26	32	26	57	47	57
32 x 20 x 25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	760518	28	32	27	59	49	50
32 x 20 x 32	710611	28	32	28	59	49	59	730519	28	31	28	57	50	57	760519	28	32	28	59	49	59
32 x 25 x 25	710613	31	34	32	62	57	56	730520	32	32	28	60	55	52	760520	31	34	30	62	57	54
32 x 25 x 32	710612	31	34	31	62	57	62	730523	32	32	32	60	55	60	760523	31	34	31	62	57	62
32 x 32 x 20	-	-	-	-	-	-	-	-	-	-	-	-	-	-	760529	34	34	32	66	66	49
40 x 20 x 40	710614	29	35	29	63	52	63	730536	31	34	31	63	53	63	760536	29	35	29	63	52	63
40 x 25 x 32	-	-	-	-	-	-	-	-	-	-	-	-	-	-	760543	33	37	31	66	60	62
40 x 25 x 40	710615	33	37	33	66	60	66	730533	35	34	35	67	58	67	760533	33	37	33	66	60	66
40 x 32 x 32	710617	36	38	33	70	69	66	730525	38	38	36	70	67	64	760525	36	38	33	70	69	66
40 x 32 x 40	710616	36	38	36	70	69	70	730524	38	38	38	70	67	70	760524	36	38	36	70	69	70
50 x 20 x 50	710618	30	40	30	69	57	69	-	-	-	-	-	-	-	-	-	-	-	-	-	-
50 x 25 x 50	710619	34	42	34	72	65	72	-	-	-	-	-	-	-	760534	34	42	34	72	65	72
50 x 32 x 50	710620	37	43	37	76	74	76	-	-	-	-	-	-	-	760526	37	43	37	76	74	76
50 x 40 x 50	710621	40	44	40	79	78	79	-	-	-	-	-	-	-	-	-	-	-	-	-	-
63 x 32 x 63	710622	53	51	53	99	82	99	-	-	-	-	-	-	-	-	-	-	-	-	-	-
63 x 50 x 63	710623	53	53	53	99	92	99	-	-	-	-	-	-	-	-	-	-	-	-	-	-


TECEflex screw connection, flat sealing



Dimension	Silicon bronze					Standard brass				
	Item No.	Z1	L1	G	SW	Item No.	Z1	L1	G	SW
16 x 1/2"	717601	22	37	1/2"	24	767578	22	37	1/2"	24
16 x 3/4"	717602	19	34	3/4"	29	767570	19	34	3/4"	29
16 x 3/8"	-	-	-	-	-	767579	22	37	3/8"	19
20 x 1/2"	-	-	-	-	-	767575	22	39	1/2"	24
20 x 1"	717604	20	37	1"	37	767576	20	37	1"	37
20 x 3/4"	717603	23	40	3/4"	29	767572	23	40	3/4"	29
25 x 1"	717605	29	53	1"	37	767574	29	53	1"	37
25 x 1 1/4"	717606	20	44	1 1/4"	46	-	-	-	-	-
25 x 3/4"	-	-	-	-	-	767573	23	48	3/4"	29
32 x 1"	-	-	-	-	-	767581	29	61	1"	37
32 x 1 1/2"	717608	22	53	1 1/2"	52	-	-	-	-	-
32 x 1 1/4"	717607	31	62	1 1/4"	46	-	-	-	-	-


TECEflex elbow coupling flat sealing, standard brass

Dimension	Item No.	Z1	Z2	L1	L2	G	SW
16 x 1/2"	767590	23	26	38	31	1/2"	24
20 x 1/2"	767591	23	28	41	33	1/2"	24
25 x 3/4"	767592	27	30	51	35	3/4"	29

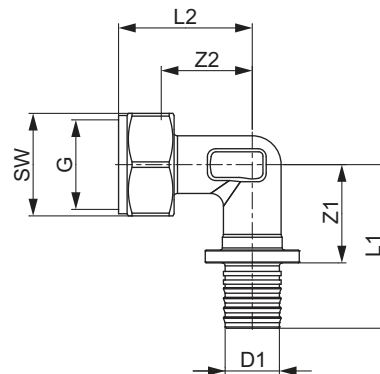

TECEflex quick adapter straight, silicon bronze


Dimension	Item No.	Z1	L1	G
16 x 1/2"	708630	22	36	1/2"

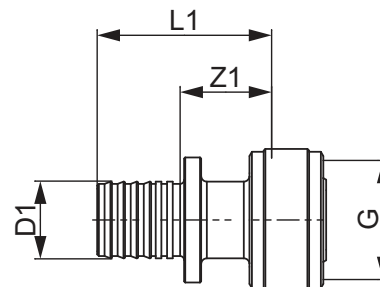

TECEflex – Dimensional drawings


TECEflex quick adapter 90° angle, silicon bronze

Dimension	Item No.	Z1	Z2	L1	G
16 x 1/2"	708631	24	25	40	1/2"

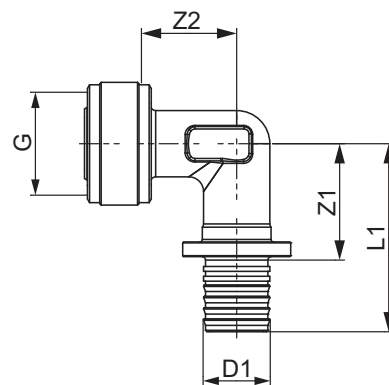


TECEflex quick adapter tee through type, silicon bronze

Dimension	Item No.	Z1	Z2	Z3	L1	L2	G
16 x 16 x 1/2"	708632	23	25	25	38	40	1/2"

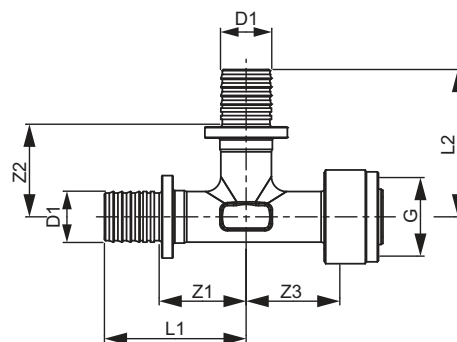


TECEflex quick adapter tee outlet, silicon bronze

Dimension	Item No.	Z1	Z2	L1	G
16 x 1/2" x 16	708633	23	26	38	1/2"

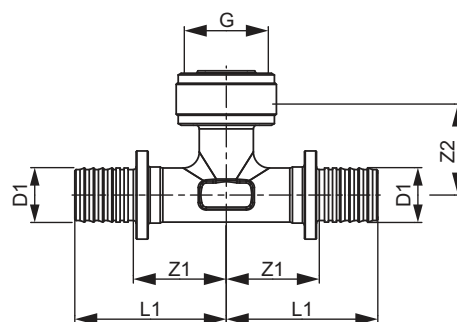


TECEflex end plug



Dimension	PPSU			Standard brass		
	Item No.	Z1	L1	Item No.	Z1	L1
16	730616	11	27	765116	9	23
20	730620	11	30	765120	9	26


TECEflex wall disk

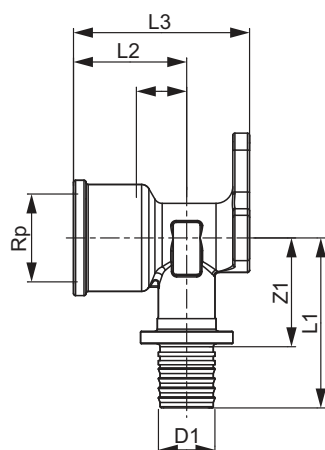

Dimension	Silicon bronze						Standard brass					
	Item No.	Z1	Z2	L1	L2	L3	Item No.	Z1	Z2	L1	L2	L3
14 x Rp 1/2"	720590	28	17	43	32	47	-	-	-	-	-	-
16 x Rp 1/2"	708610	26	12	41	27	42	768516	26	12	41	27	42
20 x Rp 1/2"	708611	26	12	43	27	42	768520	26	12	43	27	42
20 x Rp 3/4"	708612	29	15	46	31	46	768525	29	15	46	31	46
25 x Rp 3/4"	708613	31	11	54	28	46	768526	31	11	54	28	46


TECEflex wall disk, outlet 54 mm long, standard brass

Dimension	Item No.	Z1	Z2	L1	L2	L3
16 x Rp 1/2"	768503	25	25	41	39	54

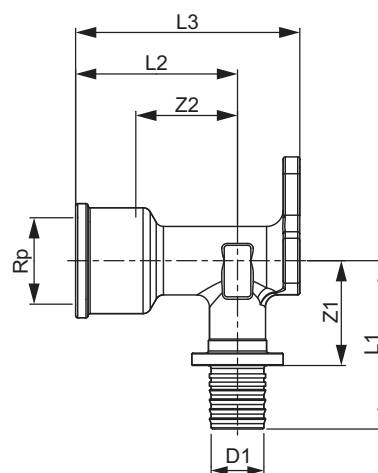

TECEflex – Dimensional drawings


TECEflex wall disk, long

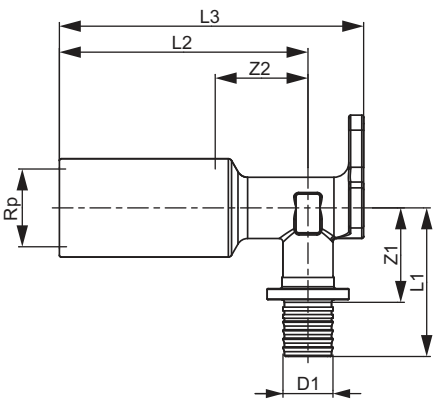

Dimension	Silicon bronze						Standard brass					
	Item No.	Z1	Z2	L1	L2	L3	Item No.	Z1	Z2	L1	L2	L3
16 x Rp 1/2"	708614	25	25	40	67	82	768502	25	25	40	67	82


TECEflex double wall disk, standard brass

Dimension	Item No.	Z1	Z2	L1	L2	L3
16 x 1/2" x 16	768501	33	11	48	26	42

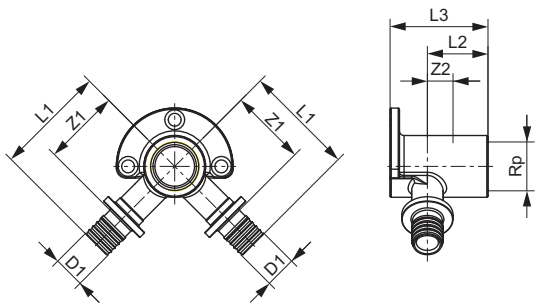


TECEflex double wall disk long, silicon bronze

Dimension	Item No.	Z1	Z2	L1	L2	L3
16 x Rp 1/2" x 16	708628	32	23	48	38	54

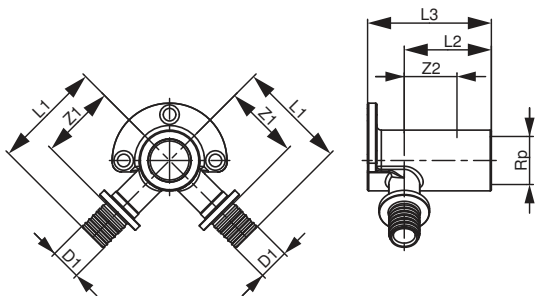


TECEflex U-double wall disk pressure-loss optimised, silicon bronze

Dimension	Item No.	Z1	Z2	L1	L2	L3	L4
16 x Rp 1/2" x 16	708625	37	12	51	27	42	45
20 x Rp 1/2" x 20	708626	26	11	53	26	42	45

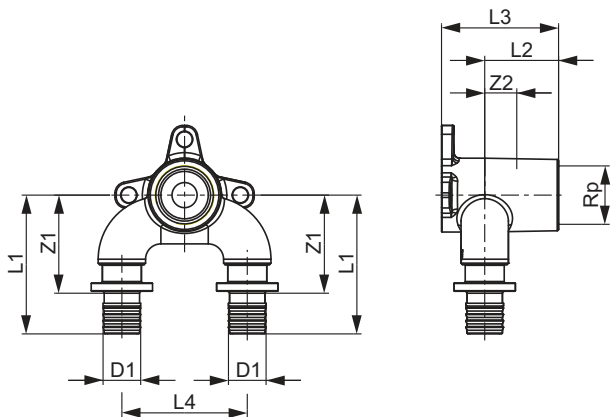


TECEflex U-double wall disk reduced pressure-loss optimised, silicon bronze

Dimension	Item No.	Z1	Z2	Z3	L1	L2	L3	L4	L5
16 x Rp 1/2" x 20	708606	36	36	11	50	53	26	42	45
20 x Rp 1/2" x 16	708607	36	36	11	53	50	26	42	45

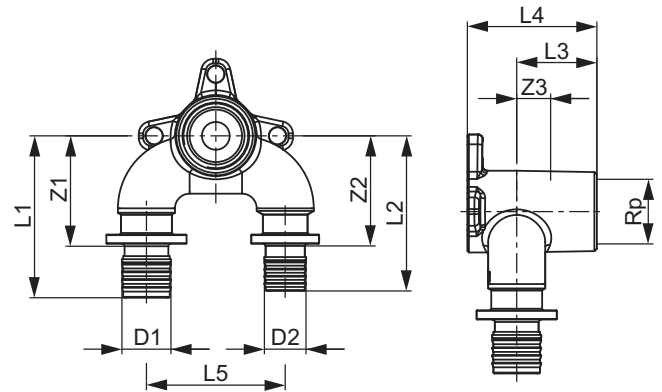


TECEflex double connection pressure-loss optimised, silicon bronze

Dimension	Item No.	Z1	Z2	L1	L2	L3
16 x R 1/2"	708608	29	31	43	44	50

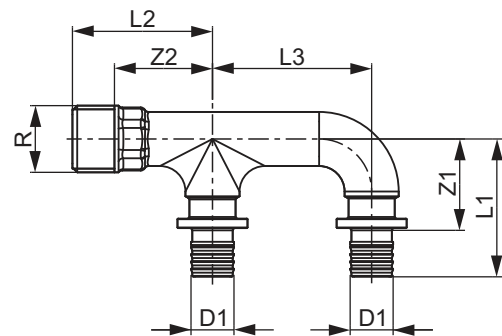


TECEflex wall bushing with pressure ring, silicon bronze

Dimension	Item No.	Z1	Z2	L1	L3	L2
16 x Rp 1/2"	708705	23	33	41	18-25	57

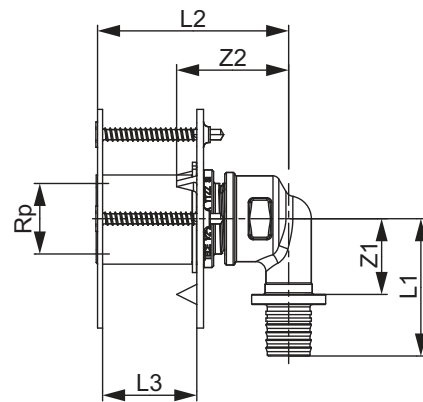

TECEflex universal wall bushing, silicon bronze


Dimension	Item No.	Z1	L1	L2
R 1/2" x Rp 1/2"	708706	14	51	18-25

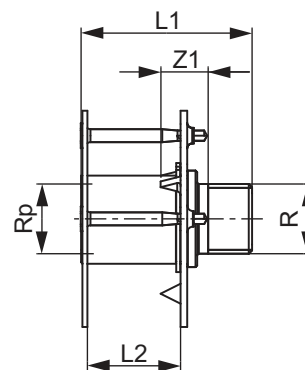

TECEflex – Dimensional drawings


TECEflex pressure-soldered connection, silicon bronze

Dimension	Item No.	Z1	L1	L2
16 x 15 mm Cu	716316	10	50	25
20 x 18 mm Cu	716320	10	52	25
20 x 22 mm Cu	716321	10	52	25
25 x 22 mm Cu	716325	12	60	25
32 x 28 mm Cu	716332	13	69	25




TECEflex Cu soldered connection made of standard brass

Dimension	Item No.	Z1	L1
14 x 15/18 mm Cu	713914	15	42
16 x 15/18 mm Cu	713916	15	42
20 x 18/22 mm Cu	713920	13	45
25 x 22/28 mm Cu	713925	18	60




TECEflex system adapter copper pipe

Dimension	Item No.	Z1	L1
16 x 15 mm Cu	713816	162	177

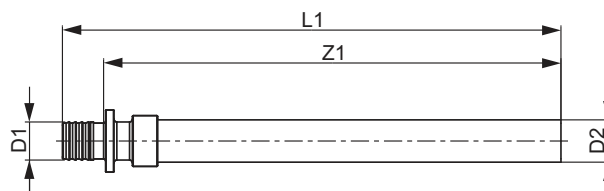


TECEflex joint adapter for TECO FASTEC, standard brass

Dimension	Item No.	Z1	L1
16	716350	10	40
20	716351	10	42
25	716352	10	50




TECEflex mounting unit with wall disks, silicon bronze, sound-proofing elements and fastener for high-temperature drain bend

Dimension	Item No.	L1	L2	L3	L4
16 x Rp 1/2"	720565	80	308	144	54

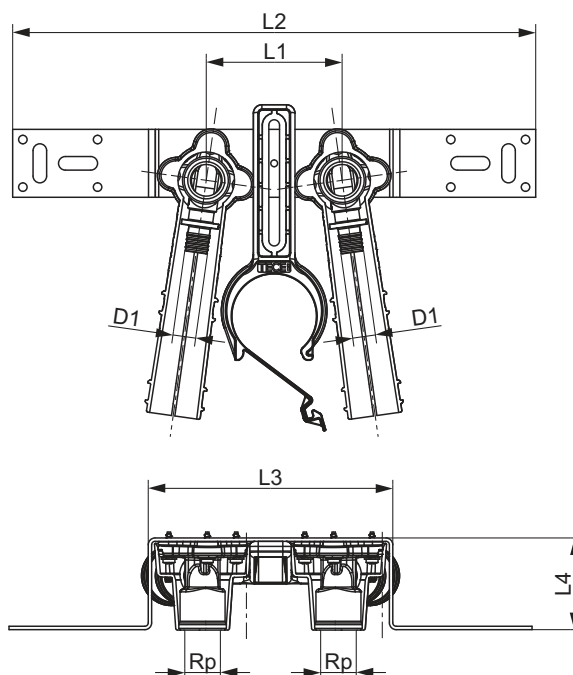


TECEflex mounting unit with reinforced brackets made of galvanised sheet steel, wall disks made of standard brass and sound insulation caps

Dimension	Item No.	L1	L2	L3	L4
16 x Rp 1/2"	721009	150	417	263	43

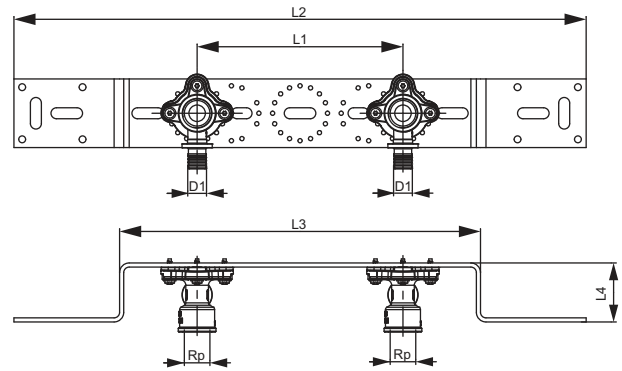


TECEflex assembly unit with wall disks made of silicone bronze and sound insulation boxes

Dimension	Item No.	L1	L2	L3	L4
16 x Rp 1/2"	720567	150	390	230	54
20 x Rp 1/2"	720568	150	390	230	54

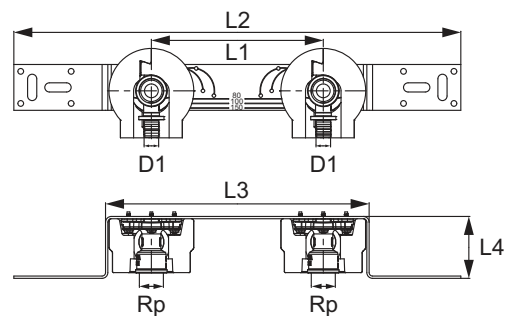


TECEflex mounting unit with wall disks made of standard brass

Dimension	Item No.	L1	L2	L3	L4
16 x Rp 1/2"	765130	150	390	230	54

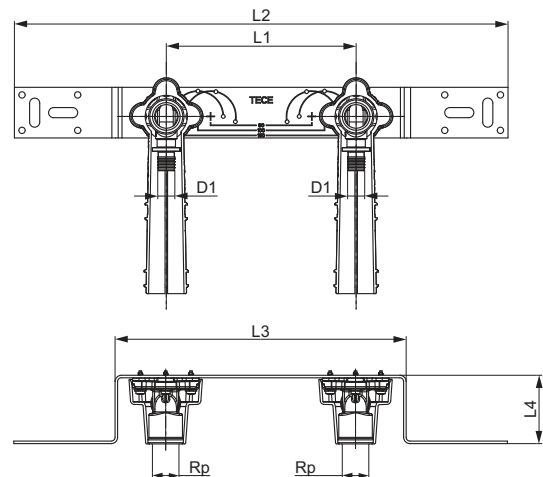

TECEflex assembly unit with wall disks made of silicone bronze and sound insulation boxes


Dimension	Item No.	L1	L2	L3	L4
16 x Rp 1/2" x 16	720569	150	434	274	54

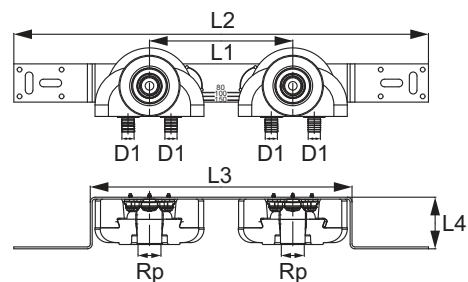

TECEflex – Dimensional drawings


TECEflex mounting unit with wall disks silicon bronze

Dimension	Item No.	L1	L2	L3	L4
16 x Rp 1/2"	720550	150	205	91	40

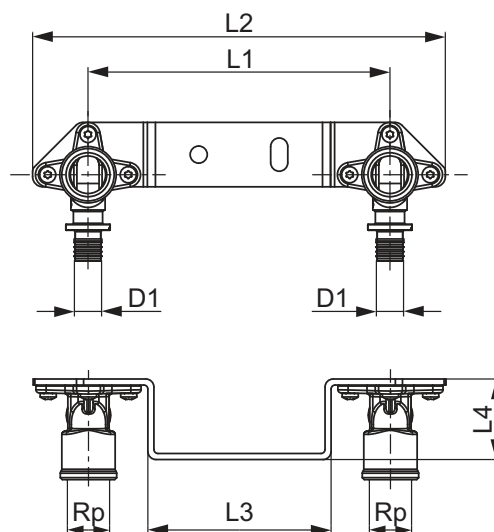


TECE Seal System assembly plug with filling and emptying valve with sealing sleeve

Dimension	Item No.	Z1	L1	G	SW
1/2"	704809	138	174	1/2"	27




TECE fastener made of galvanized steel, single

Item No.	L1	L2	L3	L4
720527	40	150	70	47




TECE fastener made of galvanized steel, double

Item No.	L1	L2	L3	L4
720528	40	390	230	54

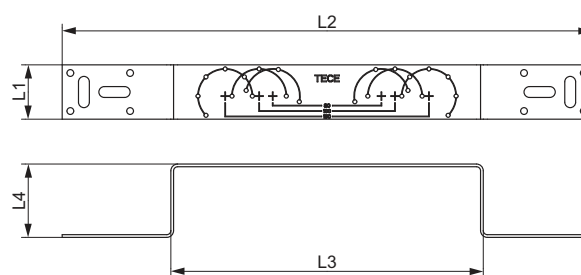


TECE fastener made of galvanized steel, double

Item No.	L1	L2	L3	L4
721005	50	417	263	43

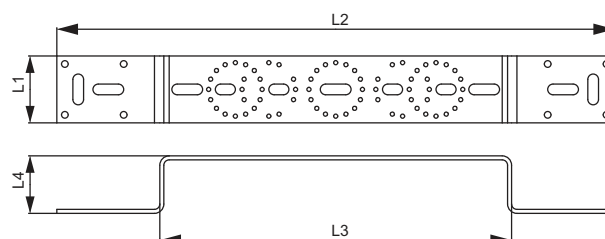


TECE screw

Dimension	Item No.	L1
3,5 x 16 mm	720524	16




TECEflex 15 mm radiator mounting bracket, nickel-plated copper

Dimension	Item No.	Z1	L1	L2
14 x 15 mm Cu	714014	73	88	289
16 x 15 mm Cu	714016	73	88	289
20 x 15 mm Cu	714020	73	90	289
16 x 15 mm Cu	714516	73	88	1089

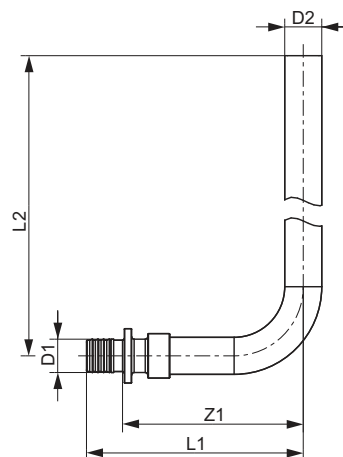


TECEflex 15 mm radiator mounting tee, nickel-plated copper

Dimension	Item No.	Z1	L1	L2
16 x 15 mm Cu	715016	40	69	289
20 x 15 mm Cu	715020	40	74	290

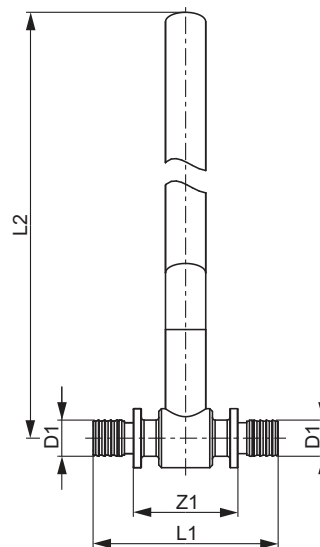

TECEflex radiator assembly set for compact valve heaters, floor-mounted, nickel-plated


Dimension	Item No.	Z1	L1	L2	L3	L4
16 x 15 mm Cu	714901	20	35	50	333	120

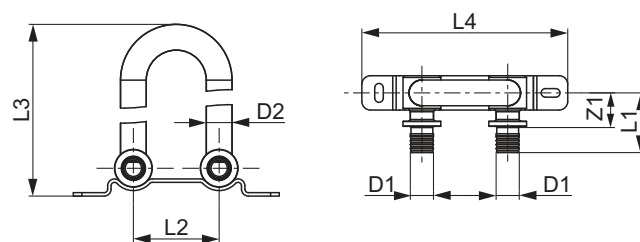

TECEflex – Dimensional drawings


TECEflex radiator mounting set for compact radiator with integrated valve, wall-mounted, nickel-plated

Dimension	Item No.	Z1	L1	L2	L3	L4
16 x 15 mm Cu	714905	20	35	50	225	240

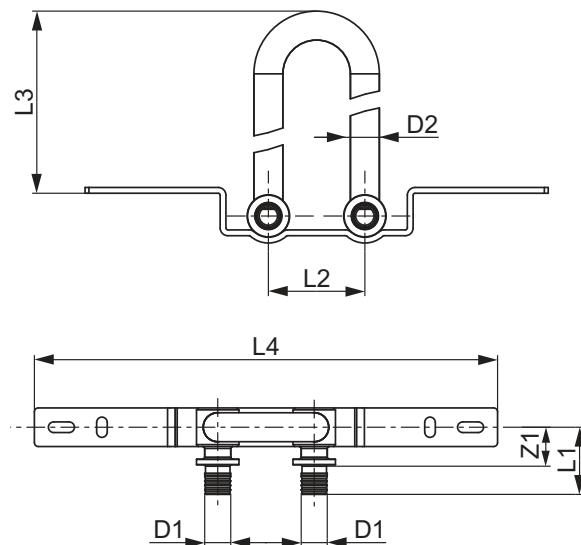


TECE skirting board radiator elbow shut-offs

Dimension	Item No.	L1	L2
15 mm Cu	730010	95	120

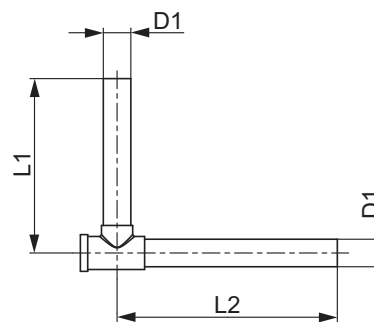


TECE skirting board radiator elbows

Dimension	Item No.	L1	L2
15 mm Cu	730025	155	75

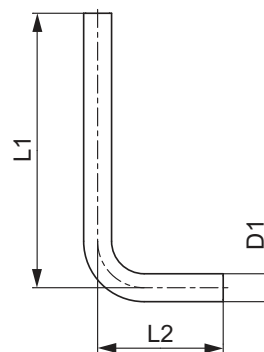


TECE male pinch screw connection 1/2"

Dimension	Item No.	G	SW
15 mm x R 1/2"	717501	1/2"	22




TECEflex radiator mounting unit for compact radiator with integrated valve, wall-mounted

Dimension	Item No.	L1	L2	L3	L4
16	714907	50	500	210	165

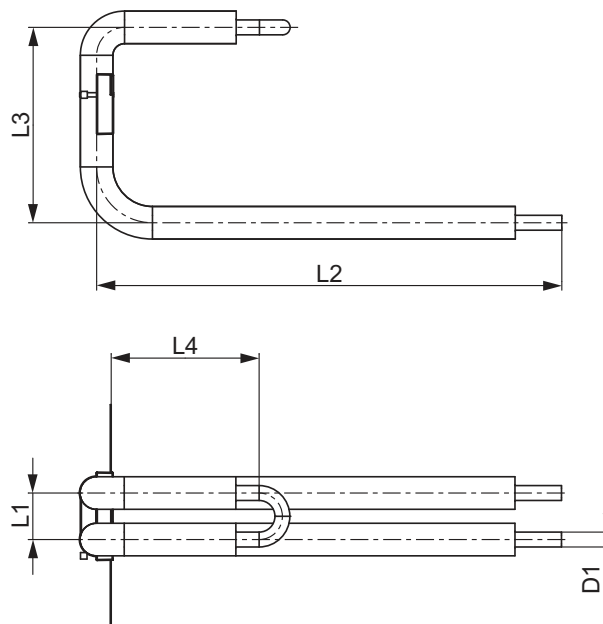


TECEflex cross fitting

Dimension	Item No.	Z1	Z2	L1	L2	L3	L4
16 x 16 x 16	718501	84	46	114	76	38	38
20 x 16 x 16	718502	86	49	116	80	40	38
20 x 16 x 20	718503	86	49	119	82	40	38

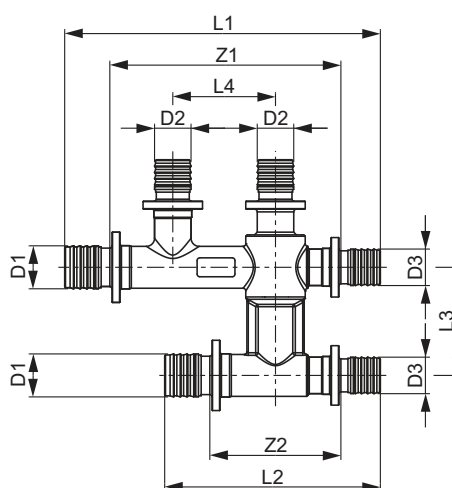

TECEflex protection box made of PS for cross-fittings


Dimension	Item No.	L1	L2	L3
16-20	718020	102	124	36

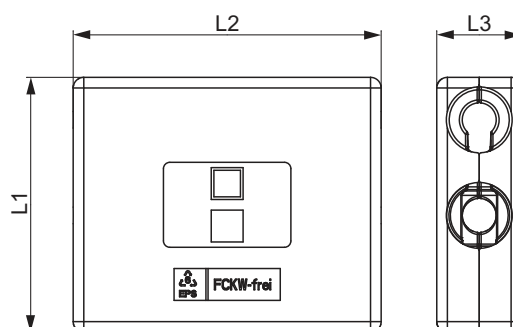

TECEflex – Dimensional drawings


TECEflex radiator installation box for compact valve heaters

Dimension	Item No.	L1	L2	L3	L4	L5	L6
16	716116	50	180	175	300	105	50

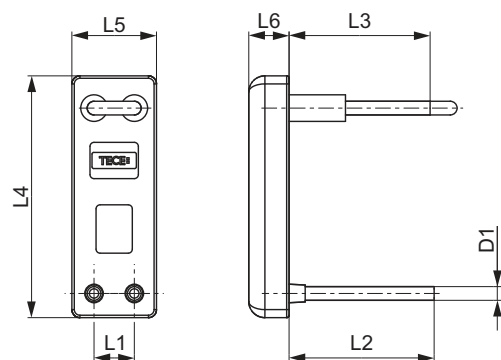


TECE two-pipe valve block for HC, through type

Dimension	Item No.	L1	G
3/4" EC x 3/4" EC	8740435	50	3/4"




TECE two-pipe valve block for HC, corner type

Dimension	Item No.	L1	G
3/4" EC x 3/4" EC	8740436	50	3/4"

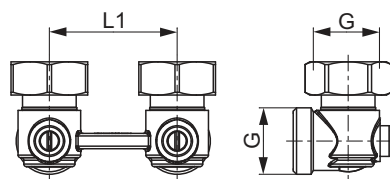


TECE two-pipe valve block for HC 1/2" MT, through type

Dimension	Item No.	L1	G
3/4" EC x R 1/2"	8740437	50	3/4"




TECE two-pipe valve block for HC 1/2" MT, corner type

Dimension	Item No.	L1	G
3/4" EC x R 1/2"	8740438	50	3/4"

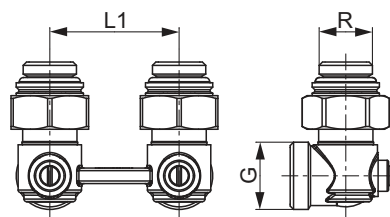


TECEflex clamped joint for all-plastic pipes

Dimension	Item No.	G	SW
14	713014	3/4"	27
20	713020	3/4"	27
16	713516	3/4"	27




TECEflex clamped joint for TECEflex multi-layer composite pipe

Dimension	Item No.	G	SW
14	713314	3/4"	27
16	713316	3/4"	27
20	713320	3/4"	27




TECE Eurocone clamped joint for copper pipes

Dimension	Item No.	G	SW
3/4" for copper pipe 15 x 1	8740439	3/4"	27




TECEflex Eurocone screw connection 3/4" with TECEflex pressure connection made of brass, nickel-plated

Dimension	Item No.	Z1	L1	G	SW
16	7136161	25	39	3/4"	30
20	7136201	23	40	3/4"	30




TECEflex Eurocone screw connection 3/4" with TECEflex press connection made of standard brass

Dimension	Item No.	Z1	L1	G	SW
16	763616	25	39	3/4"	30
20	763620	26	43	3/4"	30



TECEflex flush-mounted ball valve with handwheel, standard brass


Dimension	Item No.	Z1	L1	L2
16 x 16	751016	28	42	104
20 x 20	751020	28	46	104

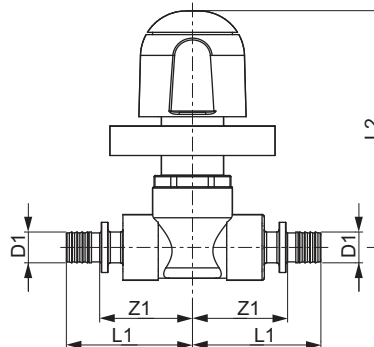

TECEflex – Dimensional drawings



TECEflex flush-mounted ball valve with dummy cap, standard brass

Dimension	Item No.	Z1	L1	L2
16 x 16	751116	28	42	76
20 x 20	751120	28	46	76

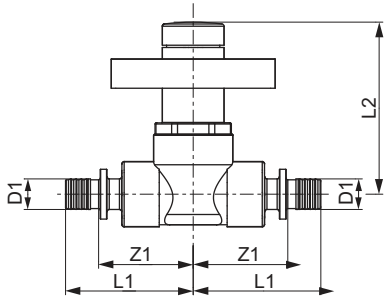



TECEflex manifold, silicon bronze

Dimension	Item No.	Z1	Z2	L1	L2	L3	L4	SW
R 3/4" x Rp 3/4" x 16 Two-way	712201	29	71	44	43	28	100	32
R 3/4" x Rp 3/4" x 16 Three-way	712202	29	114	44	43	28	143	32

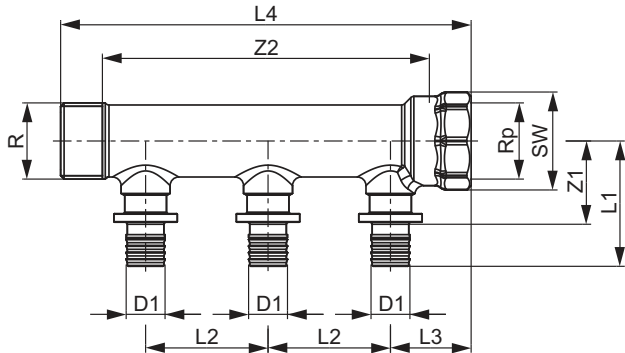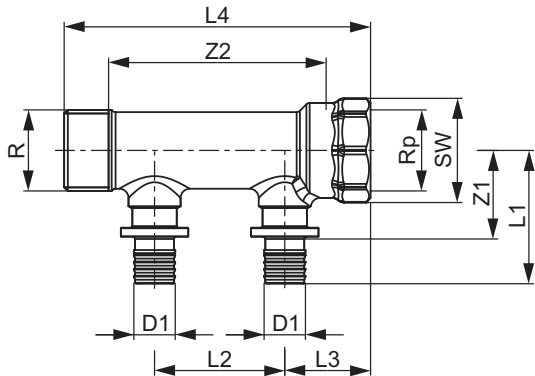


TECEflex manifold, standard brass

Dimension	Item No.	Z1	Z2	L1	L2	L3	L4	SW
R 3/4" x Rp 3/4" x 16 Two-way	762201	29	71	44	43	28	100	32
R 3/4" x Rp 3/4" x 16 Three-way	762202	29	114	44	43	28	143	32

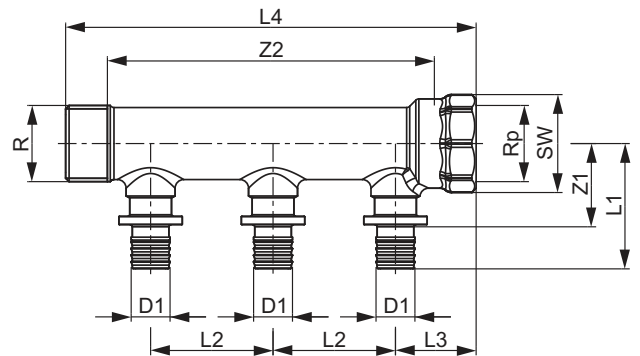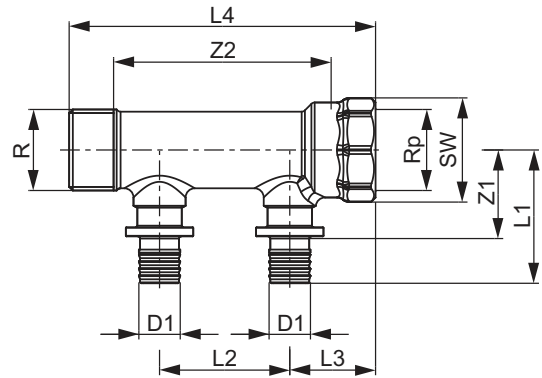


TECE universal manifold, with shut-off, standard brass

Dimension	Item No.	Z1	Z2	L1	L2	L3	L4	SW
3/4" x 3/4" EC Two-way	8730006	28	73	35	40	29	98	32
3/4" x 3/4" EC Three-way	8730007	28	113	35	40	29	138	32
1" x 3/4" EC Two-way	8730010	28	71	35	40	28	96	38
1" x 3/4" EC Three-way	8730011	28	111	35	40	28	136	38
1" x 3/4" EC four-way	8730040	28	151	35	40	28	176	38

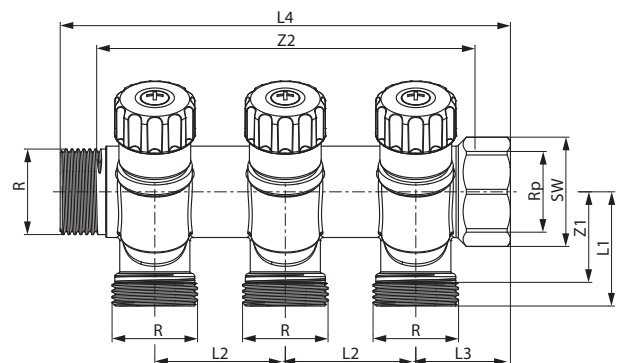

TECEflex gas safety fitting, can be installed vertically upward or horizontally

Dimension	Item No.	Z1	L1	SW
20 x R 1" GFG 2.5/TSO	750202	58	91	41
25 x R 1" GFG 2.5/TSO	750204	59	99	41
25 x R 1" GFG 4/TSO	750206	59	99	41
32 x R 1" GFG 4/TSO	750208	60	107	41
32 x R 1" GFG 6/TSO	750210	60	107	41

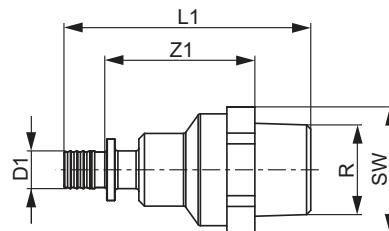



Pipe Systems

TECElogo INSTALLATION PIPE SYSTEM

TECElogo



	Page
Composite pipe	80
Push fittings	83
Push assembly elements	91
Push radiator connection	95
Push manifold	100
System components	103
Tools	105
Starter set	108
Spare parts	109
Technical pipe data	111
Dimensional drawings	113

Use TECElogo fittings with original TECElogo pipes only. The warranty will be invalid if non-system components are used. TECElogo must be processed only with system cutter and calibration tools.

Delivery unit 1 (DU 1) cannot be changed for technical reasons.

The TECElogo Installation System

The TECElogo installation system TECElogo is a universally applicable system with the dimensions 16-63 mm which has been certified by the DVGW (i.e. the German Association for Gas and Water Applications). It is suitable for heating and potable water systems. It fulfills all requirements of EN ISO 21003 for application class 5/10 bar for the heating installation or the application class 2/10 bar for the potable water installation.

Processing and laying must be carried out in accordance with EN 806, EN 1717 and national supplementary standards if required, manufacturer-specific specifications and in compliance with the relevant standards. Leak test has been carried out in accordance with ZVSHK instruction leaflet, issue January 2011. Flushing in accordance with EN 806-4.

System components

TECElogo multilayer composite pipe according to EN ISO 21003, consisting of a medium-carrying pipe made of high-density polyethylene with increased temperature resistance (PE-RT type 2) or electron-beam cross-linked polyethylene (PE-Xc), a middle layer made of a butt-welded aluminium pipe and an outer protective layer made of polyethylene (PE-RT).

TECElogo multi-layer composite pipe

Bendable and dimensionally stable; five-layer aluminium pipe according to EN ISO 21003 for potable water and heating installation. 100 % diffusion-tight.

Dimension	Item No.	DU 1	DU 2	DU 3
16 - Roll	8705016	100 m	1000 m	2000 m
20 - Roll	8705020	100 m	700 m	1400 m
25 - Roll	8705025	50 m	350 m	700 m
32 - Roll	8705232	25 m	125 m	250 m
16 - Rod	8705116	100 m	-	-
20 - Rod	8705120	70 m	-	-
25 - Rod	8705125	45 m	-	-
32 - Rod	8705132	30 m	-	-
40 - Rod	8700140	15 m	-	-
50 - Rod	8700150	15 m	-	-
63 - Rod	8700163	5 m	-	-

(rod each 5 m)



TECElogo multi-layer composite pipe in corrugated sheath pipe, black

Bendable and dimensionally stable five-layer aluminium pipe according to EN ISO 21003 for potable water and heating installation, in corrugated protective pipe (colour: black). 100 % diffusion-tight.

Dimension	Item No.	DU 1	DU 2	DU 3
16 - Roll	8705216	75 m	525 m	1050 m
20 - Roll	8705220	50 m	350 m	700 m
25 - Roll	8705225	25 m	175 m	350 m



TECElogo multi-layer composite pipe in corrugated sheath pipe, red

Multi-layer composite pipe to EN ISO 21003 for potable water and heating installation in corrugated sheath pipe (colour: red). 100 % diffusion-tight.

Dimension	Item No.	DU 1	DU 2	DU 3
16 - Roll	8709016	75 m	525 m	1050 m
20 - Roll	8709020	50 m	350 m	700 m



TECElogo multi-layer composite pipe in corrugated sheath pipe, blue

Multi-layer composite pipe to EN ISO 21003 for potable water and heating installation in corrugated sheath pipe (colour: blue). 100 % diffusion-tight.

Dimension	Item No.	DU 1	DU 2	DU 3
16 - Roll	8709017	75 m	525 m	1050 m
20 - Roll	8709021	50 m	350 m	700 m

**TECElogo multi-layer composite pipe pre-insulated, 6 mm insulation, red**

Bendable and dimensionally stable five-layer aluminium pipe according to EN ISO 21003 for potable water and heating installation, pre-insulated with 6 mm PE insulation ($\lambda_R = 0.04 \text{ W/mK}$) and tear-proof PE foil (colour: red). Can be used in accordance with DIN 1988-200 (table 8, no. 4/5 and table 9, no. 6). Normal flammability according to EN 13501 class E; 100 % HCFC and HFC free.

Dimension	Item No.	DU 1	DU 2	DU 3
16 - 6 mm insulation	8702116	75 m	300 m	600 m
20 - 6 mm insulation	8702120	75 m	300 m	600 m
25 - 6 mm insulation	8702125	50 m	200 m	400 m

**TECElogo multi-layer composite pipe pre-insulated, 6 mm insulation, blue**

Bendable and dimensionally stable five-layer aluminium pipe according to EN ISO 21003 for potable water and heating installation, pre-insulated with 6 mm PE insulation ($\lambda_R = 0.04 \text{ W/mK}$) and tear-proof PE foil (colour: blue). Can be used in accordance with DIN 1988-200 (table 8, no. 4/5 and table 9, no. 6). Normal flammability according to EN 13501 class E; 100 % HCFC and HFC free.

Dimension	Item No.	DU 1	DU 2	DU 3
16 - 6 mm insulation	8702516	75 m	300 m	600 m
20 - 6 mm insulation	8702520	75 m	300 m	600 m
25 - 6 mm insulation	8702525	50 m	200 m	400 m

**TECElogo multi-layer composite pipe pre-insulated, 9 mm insulation, red**

Bendable and dimensionally stable five-layer aluminium pipe according to EN ISO 21003 for potable water and heating installation, pre-insulated with 9 mm PE insulation ($\lambda_R = 0.04 \text{ W/mK}$) and tear-proof PE foil (colour: red). Can be used in accordance with GEG 2021 (appendix 8, line ff) and DIN 1988-200 (table 8, no. 1). Normal flammability according to EN 13501 class E; 100 % HCFC and HFC free.

Dimension	Item No.	DU 1	DU 2	DU 3
16 - 9 mm insulation	8702016	75 m	225 m	450 m
20 - 9 mm insulation	8702020	75 m	225 m	450 m
25 - 9 mm insulation	8702025	50 m	150 m	300 m



TECElogo multi-layer composite pipe pre-insulated, 9 mm insulation, blue

Bendable and dimensionally stable five-layer aluminium pipe according to EN ISO 21003 for potable water and heating installation, pre-insulated with 9 mm PE insulation ($\lambda_R = 0.04 \text{ W/mK}$) and tear-proof PE foil (colour: blue). Can be used in accordance with GEG 2021 (appendix 8, line ff) and DIN 1988-200 (table 8, no. 1). Normal flammability according to EN 13501 class E; 100 % HCFC and HFC free.



Dimension	Item No.	DU 1	DU 2	DU 3
16 - 9 mm insulation	8702416	75 m	225 m	450 m
20 - 9 mm insulation	8702420	75 m	225 m	450 m
25 - 9 mm insulation	8702425	50 m	150 m	300 m

TECElogo multi-layer composite pipe pre-insulated, 13 mm insulation, red

Bendable and dimensionally stable five-layer aluminium pipe according to EN ISO 21003 for potable water and heating installation, pre-insulated with 13 mm PE insulation ($\lambda_R = 0.04 \text{ W/mK}$) and tear-proof PE foil (colour: red). Can be used in accordance with GEG 2021 (appendix 8, line ee) and DIN 1988-200 (table 8, no. 2 and 6). Normal flammability according to EN 13501 class E; 100 % HCFC and HFC free.



Dimension	Item No.	DU 1	DU 2	DU 3
16 - RS 13 mm	8702216	50 m	150 m	300 m
20 - RS 13 mm	8702220	50 m	150 m	300 m
25 - RS 13 mm	8702225	25 m	100 m	200 m

TECElogo multi-layer composite pipe PE-RT/Al/PE-RT pre-insulated, 26 mm insulation, red

Multi-layer composite pipe according to EN ISO 21003 for potable water and heating installation, pre-insulated with 26 mm PE insulation ($\lambda_R = 0.04 \text{ W/mK}$) and tear-proof PE foil (colour: red). Can be used in accordance with GEG 2021 (Appendix 8 line Aa) and DIN 1988-200 (table 8, nos. 2 and 6). Normal flammability according to EN 13501 class E; 100 % HCFC and HFC free.



Dimension	Item No.	DU 1	DU 2	DU 3
16 - RS 26 mm	8702616	25 m	50 m	100 m
20 - RS 26 mm	8702620	25 m	50 m	100 m
25 - RS 26 mm	8702625	25 m	50 m	100 m

TECElogo-Push

Push fittings with integrated retaining technology for a tool-free connection. TECElogo-Push is available in dimensions from 16-63 mm. Threaded fittings made of red brass/silicon bronze, threadless fittings made of polyphenylsulfone (PPSU). As an alternative, fittings made of standard brass are available for heating installations. Standard brass is not approved by TECE for drinking water installations.

TECElogo-Push female connector

Push-fitting with integrated grip function. For potable water and heating installations.

Red brass/silicon bronze**Standard brass***

Dimension	DU 1	DU 2	Item No.	Item No.
16 x Rp 1/2"	10 pc.	100 pc.	8713002	8610002
20 x Rp 1/2"	10 pc.	100 pc.	8713003	8610003
20 x Rp 3/4"	10 pc.	80 pc.	8713004	8610004
25 x Rp 1"	5 pc.	50 pc.	8713006	8610006
25 x Rp 3/4"	10 pc.	50 pc.	8713005	8610005
32 x Rp 1"	1 pc.	20 pc.	8713007	8610007
40 x Rp 1 1/2"	1 pc.	20 pc.	8713008	8610008
50 x Rp 2"	1 pc.	8 pc.	8713009	8610009
63 x Rp 2"	1 pc.	4 pc.	8713010	-

TECElogo-Push male connector

Push-fitting with integrated grip function. For potable water and heating installations.

Red brass/silicon bronze**Standard brass***

Dimension	DU 1	DU 2	Item No.	Item No.
16 x R 1/2"	10 pc.	100 pc.	8713102	8610102
16 x R 3/4"	10 pc.	100 pc.	8713103	8610103
16 x R 3/8"	10 pc.	100 pc.	-	8610100
20 x R 1/2"	10 pc.	80 pc.	8713104	8610104
20 x R 3/4"	10 pc.	50 pc.	8713105	8610105
25 x R 1"	10 pc.	50 pc.	8713107	8610107
25 x R 3/4"	10 pc.	50 pc.	8713106	8610106
32 x R 1"	1 pc.	20 pc.	8713108	8610116
40 x R 1 1/4"	1 pc.	20 pc.	8713109	8610117
50 x R 1 1/2"	1 pc.	8 pc.	8713110	8610118
63 x R 2"	1 pc.	4 pc.	8713111	-

* For the selection of materials, please refer to the information in the "Technical pipe data" chapter.

TECElogo – Push fittings

TECElogo-Push coupling, PPSU

Push-fitting with integrated grip function. For potable water and heating installations.

Dimension	Item No.	DU 1	DU 2
16 x 16	8710516	10 pc.	80 pc.
20 x 20	8710520	10 pc.	80 pc.
25 x 25	8710525	10 pc.	80 pc.
32 x 32	8710532	1 pc.	20 pc.
40 x 40	8710540	1 pc.	20 pc.
50 x 50	8710550	1 pc.	8 pc.
63 x 63	8710563	1 pc.	4 pc.



TECElogo-Push coupling reduced, PPSU

Push-fitting with integrated grip function. For potable water and heating installations.

Dimension	Item No.	DU 1	DU 2
20 x 16	8710616	10 pc.	80 pc.
25 x 16	8710620	10 pc.	80 pc.
25 x 20	8710625	10 pc.	80 pc.
32 x 20	8710632	1 pc.	20 pc.
32 x 25	8710633	1 pc.	20 pc.
40 x 32	8710640	1 pc.	20 pc.
50 x 40	8710650	1 pc.	8 pc.
63 x 50	8710663	1 pc.	4 pc.



TECElogo-Push 90° elbow, PPSU

Push-fitting with integrated grip function. For potable water and heating installations.

Dimension	Item No.	DU 1	DU 2
16 x 16	8710716	10 pc.	100 pc.
20 x 20	8710720	10 pc.	50 pc.
25 x 25	8710725	10 pc.	40 pc.
32 x 32	8710732	1 pc.	20 pc.
40 x 40	8710740	1 pc.	8 pc.
50 x 50	8710750	1 pc.	4 pc.
63 x 63	8710763	1 pc.	4 pc.



TECElogo-Push insertion elbow 90°, PPSU

Push-fitting with integrated grip function. For potable water and heating installations.

Dimension	Item No.	DU 1	DU 2
16 x 16	8711116	10 pc.	100 pc.
20 x 20	8711120	10 pc.	50 pc.
25 x 25	8711125	10 pc.	40 pc.



TECElogo-Push elbow 45°, red brass/silicon bronze

Push-fitting with integrated grip function. For potable water and heating installations.

Dimension	Item No.	DU 1	DU 2
25 x 25	8711225	10 pc.	40 pc.
32 x 32	8711232	5 pc.	20 pc.
40 x 40	8711240	2 pc.	20 pc.
50 x 50	8711250	2 pc.	10 pc.
63 x 63	8711263	1 pc.	5 pc.

**TECElogo-Push female elbow****Red brass/silicon bronze****Standard brass***

Dimension	DU 1	DU 2	Item No.	Item No.
16 x Rp 1/2"	10 pc.	100 pc.	8713202	8610202
20 x Rp 1/2"	10 pc.	100 pc.	8713203	8610203
20 x Rp 3/4"	10 pc.	80 pc.	8713204	8610204
25 x Rp 3/4"	10 pc.	50 pc.	8713205	8610205
32 x Rp 1"	1 pc.	20 pc.	8713206	8610206

TECElogo-Push male elbow**Red brass/silicon bronze****Standard brass***

Dimension	DU 1	DU 2	Item No.	Item No.
16 x R 1/2"	10 pc.	100 pc.	8713302	8610302
20 x R 1/2"	10 pc.	80 pc.	8713303	8610303
20 x R 3/4"	10 pc.	80 pc.	8713304	8610304
25 x R 1"	10 pc.	50 pc.	8713306	8610306
25 x R 3/4"	10 pc.	50 pc.	8713305	8610305
32 x R 1"	1 pc.	20 pc.	8713307	8610312

* For the selection of materials, please refer to the information in the "Technical pipe data" chapter.

TECElogo – Push fittings

TECElogo-Push tee female thread

Red brass/silicon bronze

Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.
16 x Rp 1/2" x 16	10 pc.	80 pc.	8713402	8610402
20 x Rp 1/2" x 20	10 pc.	50 pc.	8713403	8610403
25 x Rp 3/4" x 25	10 pc.	40 pc.	8713404	8610404
32 x Rp 1" x 32	1 pc.	8 pc.	8713405	8610406
40 x Rp 1" x 40	1 pc.	8 pc.	8713406	8610408
50 x Rp 1 1/4" x 50	1 pc.	4 pc.	8713407	8610410
63 x Rp 1 1/2" x 63	1 pc.	4 pc.	8713408	-

TECElogo-Push tee, PPSU

Push-fitting with integrated grip function. For potable water and heating installations.

Dimension	Item No.	DU 1	DU 2
16 x 16 x 16	8710916	10 pc.	40 pc.
20 x 20 x 20	8710920	10 pc.	40 pc.
25 x 25 x 25	8710925	10 pc.	40 pc.
32 x 32 x 32	8710932	1 pc.	8 pc.
40 x 40 x 40	8710940	1 pc.	8 pc.
50 x 50 x 50	8710950	1 pc.	4 pc.
63 x 63 x 63	8710963	1 pc.	4 pc.



TECElogo-Push tee reduced, PPSU

Push-fitting with integrated grip function. For potable water and heating installations.

Dimension	Item No.	DU 1	DU 2
20 x 16 x 16	8711004	10 pc.	40 pc.
20 x 16 x 20	8711005	10 pc.	40 pc.
20 x 20 x 16	8711006	10 pc.	40 pc.
20 x 25 x 20	8711011	10 pc.	40 pc.
25 x 16 x 16	8711007	10 pc.	40 pc.
25 x 16 x 25	8711008	10 pc.	40 pc.
25 x 20 x 20	8711009	10 pc.	40 pc.
25 x 20 x 25	8711010	10 pc.	40 pc.
32 x 16 x 32	8711012	1 pc.	8 pc.
32 x 20 x 32	8711013	1 pc.	8 pc.
32 x 25 x 32	8711014	1 pc.	8 pc.
32 x 25 x 25	8711015	1 pc.	8 pc.
40 x 25 x 40	8711017	1 pc.	8 pc.
40 x 32 x 40	8711018	1 pc.	8 pc.
40 x 32 x 32	8711019	1 pc.	8 pc.
50 x 25 x 50	8711020	1 pc.	4 pc.
50 x 32 x 50	8711021	1 pc.	4 pc.
63 x 32 x 63	8711022	1 pc.	4 pc.
63 x 50 x 63	8711023	1 pc.	4 pc.



TECElogo-Push end plug, PPSU

Push-fitting with integrated grip function. For potable water and heating installations.



Dimension	Item No.	DU 1	DU 2
16	8710817	10 pc.	50 pc.
20	8710821	10 pc.	50 pc.

TECElogo-Push pressing adapter, red brass/silicon bronze

Pressing adapter on stainless-steel or copper pipes with TECElogo-Push push-fitting with integrated grip function.



Dimension	Item No.	DU 1	DU 2
16 x 15 mm	8730100	10 pc.	100 pc.
20 x 18 mm	8730101	10 pc.	100 pc.
25 x 22 mm	8730102	10 pc.	50 pc.

TECElogo-Push screw connection, flat sealing

Red brass/silicon bronze

Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.
16 x 1/2"	5 pc.	80 pc.	8733201	8630201
16 x 3/4"	5 pc.	80 pc.	8733202	8630202
16 x 3/8"	5 pc.	80 pc.	-	8630200
20 x 3/4"	5 pc.	50 pc.	8733203	8630203
25 x 1"	5 pc.	50 pc.	8733204	8630204
32 x 1 1/4"	1 pc.	20 pc.	8733205	8630205
40 x 1 1/2"	1 pc.	20 pc.	-	8630207

TECElogo-Push elbow coupling flat sealing, standard brass*

Dimension	Item No.	DU 1	DU 2
16 x 1/2"	8730216	5 pc.	80 pc.
16 x 3/8"	8730215	5 pc.	80 pc.

**TECElogo-Push quick adapter, silicon bronze**

Quick adapter to connect TECElogo pipes to a 1/2" TECE quick connection without tools. The TECE cisterns are equipped with compatible quick connectors; with plug-in male thread for TECElogo-Push push-fitting with integrated grip function.



Dimension	Item No.	DU 1	DU 2
16 x 1/2"	8730310	10 pc.	50 pc.

TECElogo – Push fittings

TECElogo-Push wall disk

Red brass/silicon bronze



Standard brass*



Dimension	DU 1	DU 2	Item No.	Item No.
16 x Rp 1/2"	10 pc.	80 pc.	8723002	8620002
20 x Rp 1/2"	10 pc.	60 pc.	-	8620003

TECElogo-Push universal wall disk, red brass/silicon bronze

Universal wall disk with 20 mm plug-in male thread for TECElogo-Push push-fittings with integrated grip function. For potable water and heating installations.



Dimension	Item No.	DU 1	DU 2
20 x Rp 1/2"	8723003	10 pc.	60 pc.

Note:

In conjunction with a TECElogo-Push tee or tee reduced, you build your double wall disk yourself.

TECElogo-Push double wall disk, standard brass*

Dimension	Item No.	DU 1	DU 2
16 x Rp 1/2" x 16	8620007	10 pc.	40 pc.



TECElogo-Push double wall disk, silicon bronze

Dimension	Item No.	DU 1	DU 2
16 x Rp 1/2" x 16	8723014	10 pc.	40 pc.



TECElogo-Push universal double wall disk, red brass/silicon bronze

Universal double wall disk with 20 mm plug-in male thread for TECElogo-Push push-fittings with integrated grip function. For potable water and heating installations.



Dimension	Item No.	DU 1	DU 2
20 x Rp 1/2" x 20	8723011	10 pc.	40 pc.

TECElogo-Push wall disk long, standard brass*

Dimension	Item No.	DU 1	DU 2
16 x Rp 1/2"	8620008	10 pc.	50 pc.

**TECElogo-Push universal wall disk, long, red brass/silicon bronze**

Universal wall disk, long, with 20 mm plug-in male thread for TECElogo-Push push-fittings with integrated grip function. For potable water and heating installations.

Dimension	Item No.	DU 1	DU 2
20 x Rp 1/2"	8723008	10 pc.	50 pc.

**Note:**

In conjunction with a TECElogo-Push tee or tee reduced, you build your double wall disk yourself.

TECElogo-Push mounting unit, standard brass*

Wall bushing with push-fitting with integrated grip function.

Dimension	Item No.	DU 1	DU 2
16 x Rp 1/2"	8620009	10 pc.	40 pc.

**TECElogo-Push universal wall bushing, red brass/silicon bronze**

Universal wall bushing with 16 mm plug-in male thread for TECElogo push-fittings with integrated grip function. For potable water and heating installations. With pressure ring, screws and sound-insulation inserts, can be adjusted for wall thicknesses of 18-25 mm.

Dimension	Item No.	DU 1	DU 2
16 x Rp 1/2"	8723009	10 pc.	40 pc.

**TECElogo-Push push-fit wall bushing with attachment nuts 3/4"**

Universal wall bushing made of silicon bronze with long thread and metallic attachment nuts for variable depth adjustment. The maximum wall thickness/depth setting is 35 mm. With plug-in male thread for TECElogo-Push push-fitting with integrated grip function, for potable water and heating installations.

Dimension	Item No.	DU 1	DU 2
16 x Rp 1/2"	8723012	10 pc.	40 pc.
20 x Rp 1/2"	8723013	10 pc.	40 pc.



* For the selection of materials, please refer to the information in the "Technical pipe data" chapter.

TECElogo – Push fittings

TECElogo-Push plug-in coupling, DR brass*

Dimension	Item No.	DU 1	DU 2
25 x 20	8730028	1 pc.	50 pc.



TECElogo-Push push-in stopper

Dimension	Item No.	DU 1	DU 2
16	8730032	10 pc.	200 pc.



TECElogo-Push joint adapter for TECO FASTEC, standard brass

Joint adapter for connecting TECElogo pipes to TECO FASTEC products, with 20 mm plug-in male thread for TECElogo-Push push-fittings with integrated grip function.

Use the TECElogo FASTEC adapter in combination with the TECElogo coupling 8710520 and for diameters 16 and 25 with the TECElogo coupling reduced 8710616 for 16 mm and 8710625 for 25 mm.

Dimension	Item No.	DU 1	DU 2
20	8730050	10 pc.	50 pc.



TECE sound-proofing element

Sound-proofing element for TECEflex and TECElogo wall disks. To minimize transmission of noise to the structure; consisting of sound insulation inserts and sound-proofing cover.

Dimension	Item No.	DU 1	DU 2
For 1/2" wall disks	7 18017	10 pc.	40 pc.
For 1/2" wall disks, long	7 18022	10 pc.	40 pc.
For 1/2" U-double wall disks	7 18024	10 pc.	40 pc.

Caution: Not suitable for use with the Seal System sealing sleeve.

**TECE sound insulation box with a special recess for the Seal System sealing sleeve**

Sound insulation box for TECEflex and TECElogo wall disks made of high-quality EPP with heat and sound insulation properties. Corresponds to thermal insulation according to GEG 2021 (Annex 8, line ee), specially for combination with the Seal System sealing sleeve.

Dimension	Item No.	DU 1	DU 2
16-20 x Rp 1/2"	7 18031	10 pc.	40 pc.

**TECE sound shield for wall disk**

Sound shield for TECEflex and TECElogo wall disks. To reduce noise transmission to structure.

Item No.	DU 1	DU 2
7 18026	10 pc.	100 pc.

**TECE Seal System assembly plug with sealing sleeve**

Reusable special assembly plug for mounting the sealing sleeve in the shell construction phase. Suitable for leak and load testing with air or water. With a metallic thread made of material suitable for drinking water, including Seal System sealing sleeve.

Dimension	Item No.	DU 1	DU 2
1/2"	704802	6 pc.	-
3/4"	704812	10 pc.	50 pc.

**TECE Seal System sealing sleeve**

Sealing sleeve for creating a standard-compliant wall bushing with walls exposed to water in accordance with DIN 18534 (2017).

Leak water created by an unsealed threaded connection between the wall disk and the valve extension is guided forwards out of the wall. In addition to the TECE wall disks, also suitable for many third-party products.

Dimension	Item No.	DU 1	DU 2
1/2"	704801	10 pc.	-
3/4"	704811	10 pc.	50 pc.

In connection with the Seal System sealing sleeve and a suitable sealing grout. The suitability of external products can be found in the technical information.



TECElogo – Push assembly elements

TECE Seal System assembly plug with filling and emptying valve with sealing sleeve

Reusable assembly plug with a filling and emptying valve, equipped with a hose connection.

Dimension	Item No.	DU 1	DU 2
1/2"	704809	10 pc.	30 pc.



TECE Seal System sealing collar

Seal System sealing collar for sealing against intrusion of moisture into the wall via fitting connections.

Dimension	Version	Item No.	DU 1	DU 2
140 x 140 mm	1/2"	704803	10 pc.	500 pc.
170 x 170 mm	3/4"	704813	10 pc.	500 pc.



TECE Seal System sealing set 1/2" for wall bushings

Seal System sealing set consisting of:

- 2 x assembly plugs
- 2 x sealing sleeves
- 2 x sealing collars

Item No.	DU 1
704805	1 pc.



TECE fastener made of galvanized steel, single

To fasten TECEflex and TECElogo wall disks, angled, made of galvanized steel.

Item No.	DU 1	DU 2
720527	10 pc.	80 pc.



TECE fastener made of galvanized steel, double

To fasten TECEflex and TECElogo wall disks, angled, made of galvanized steel. Suitable for centres 150 and 80 mm.

Item No.	DU 1	DU 2
720528	5 pc.	20 pc.



TECE fastener made of galvanized steel, double

Item No.	DU 1	DU 2
721005	5 pc.	25 pc.



TECE screw

To fasten TECEflex and TECElogo wall disks to galvanized steel fasteners.

Dimension	Item No.	DU 1	DU 2
3,5 x 16 mm	720524	100 pc.	3000 pc.

**TECElogo-Push mounting unit, red brass/silicon bronze**

Prefabricated mounting unit, centre 80 mm. Consisting of two TECElogo-Push wall disks, mounted twist-proof on TECE wall mount. Includes sound-proofing elements and fastener for drain bend. For potable water installations.

Dimension	Centre	Item No.	DU 1	DU 2
16 x Rp 1/2"	80 mm	8723101	1 pc.	5 pc.

**TECElogo-Push mounting unit, red brass/silicon bronze**

Prefabricated mounting unit, centre 150 mm. Consisting of two TECElogo-Push wall disks, mounted twist-proof on TECE wall mount, includes sound-proofing elements. For potable water installations.

Dimension	Centre	Item No.	DU 1	DU 2
16 x Rp 1/2"	150 mm	8723100	1 pc.	5 pc.

**TECElogo-Push universal mounting, red brass/silicon bronze**

Prefabricated mounting unit, centre 150 mm. Consisting of two TECElogo-Push universal wall disks, mounted twist-proof on TECE wall mount, includes sound-proofing elements. For potable water installations.

Dimension	Centre	Item No.	DU 1	DU 2
20 x 1/2"	150 mm	8723102	1 pc.	5 pc.

**TECElogo-Push mounting unit standard brass**

Dimension	Centre	Item No.	DU 1	DU 2
16 x Rp 1/2"	150 mm	8620100	1 pc.	5 pc.

**TECE wrap-around tape assembly**

Co-extruded three-layer tape for protecting TECE installation pipe connections against external corrosion influences.

Length 12.5 m, width 30 mm, thickness 1 mm

Item No.	DU 1	DU 2
720579	12.5 m	225 m



TECElogo – Push assembly elements

TECElogo-Push mounting unit standard brass

Dimension	Centre	Item No.	DU 1	DU 2
16 x 1/2"	153 mm	8620103	1 pc.	5 pc.



TECE pipe bend guides

Pipe bend guides made of plastic, to guide pipes out of the screed.

Dimension	Item No.	DU 1	DU 2
14-17 mm	77910010	25 pc.	200 pc.
18-20 mm	77910011	25 pc.	100 pc.
25 mm	77910012	25 pc.	100 pc.



TECElogo-Push radiator mounting elbow

Radiator mounting elbow with push-fitting with integrated grip function, for heating installations, 15 mm copper pipe, nickel-plated.

Dimension	Item No.	DU 1	DU 2
16 x 15 mm Cu	8740401	10 pc.	50 pc.
20 x 15 mm Cu	8740402	10 pc.	50 pc.

**TECElogo-Push radiator mounting tee**

Radiator mounting tee with push-fitting with integrated grip function, for heating installations, 15 mm copper pipe, nickel-plated.

Dimension	Item No.	DU 1	DU 2
16 x 15 mm Cu	8740403	10 pc.	40 pc.
20 x 15 mm Cu	8740404	10 pc.	40 pc.

**TECElogo-Push radiator mounting set**

Radiator mounting set with push-fitting with integrated grip function, for compact radiator with integrated valve, floor-mounted, for heating installations, 15 mm copper pipe, nickel-plated.

Dimension	Item No.	DU 1	DU 2
16 x 15 mm Cu	8740405	1 pc.	5 pc.

**TECElogo-Push radiator mounting set**

Radiator mounting set with push-fitting with integrated grip function, for compact radiator with integrated valve, wall-mounted, for heating installations, 15 mm copper pipe, nickel-plated.

Dimension	Item No.	DU 1	DU 2
16 x 15 mm Cu	8740406	1 pc.	5 pc.

**TECE skirting board radiator elbow shut-offs**

Made of 15 mm nickel-plated Cu pipe, adjustable and with shut-off, for connection of radiator to TECEflex or TECElogo-Push skirting board radiator connection set.

Dimension	Item No.	DU 1	DU 2
15 mm Cu	730010	1 set	25 set



TECElogo – Push radiator connection

TECE skirting board radiator elbows

Made of nickel-plated copper pipe 15 mm, for connecting the radiator to standard skirting board connection fittings.

Dimension	Item No.	DU 1	DU 2
15 mm Cu	730025	1 set	20 set



TECE male pinch screw connection 1/2"

15 mm, nickel-plated pinch screw connection to join TECEflex/TECElogo radiator mounting elbow or radiator tees to thermostat valves or to the radiator screw connections.

Dimension	Item No.	DU 1	DU 2
15 mm x R 1/2"	717501	10 pc.	150 pc.



TECE thermostat head

TECE thermostat head M 30 x 1.5, setting range 7-28 °C.

Colour	Item No.	DU 1	DU 2
White	8740461	1 pc.	75 pc.



TECE thermostat valve body, through type

Thermostat valve body, through type, preconfigurable.

Dimension	Item No.	DU 1	DU 2
R 1/2" x Rp 1/2"	8740431	1 pc.	20 pc.



TECE thermostat valve body, corner type

Thermostat valve body, corner type, preconfigurable.

Dimension	Item No.	DU 1	DU 2
R 1/2" x Rp 1/2"	8740432	1 pc.	20 pc.



TECE thermostat valve, through type

Thermostat valve lower part, 90° presettable.

Dimension	Item No.	DU 1	DU 2
R 1/2" x Rp 1/2"	8740463	1 pc.	20 pc.



TECE radiator return screw connection, through type

Radiator return screw connection, through type.

Dimension	Item No.	DU 1	DU 2
R 1/2" x Rp 1/2"	8740433	1 pc.	20 pc.



TECE radiator return screw connection, corner type

Radiator return screw connection, corner version.

Dimension	Item No.	DU 1	DU 2
R 1/2" x Rp 1/2"	8740434	1 pc.	20 pc.

**TECE two-pipe valve block for HC, through type**

Two-pipe valve block for radiator, through type with 3/4" Eurocone.

Dimension	Item No.	DU 1	DU 2
3/4" EC x 3/4" EC	8740435	1 pc.	10 pc.

**TECE two-pipe valve block for HC, corner type**

Two-pipe valve block for radiator, corner type with 3/4" Eurocone.

Dimension	Item No.	DU 1	DU 2
3/4" EC x 3/4" EC	8740436	1 pc.	10 pc.

**TECE two-pipe valve block for HC 1/2" MT, through type**

Two-pipe valve block for radiator, through type with 1/2" male thread and 3/4" Eurocone.

Dimension	Item No.	DU 1	DU 2
3/4" EC x R 1/2"	8740437	1 pc.	10 pc.

**TECE two-pipe valve block for HC 1/2" MT, corner type**

Two-pipe valve block for radiator, corner type with 1/2" male thread and 3/4" Eurocone.

Dimension	Item No.	DU 1	DU 2
3/4" EC x R 1/2"	8740438	1 pc.	10 pc.

**TECElogo radiator mounting unit**Radiator mounting unit for compact radiator with integrated valve, with pre-insulated multi-layer composite pipe, 9 mm insulation, λ_R 0.040 W/(mK).

Dimension	Item No.	DU 1	DU 2
16	8740550	1 pc.	5 pc.



TECElogo – Push radiator connection

TECElogo-Push adapter screw connection, standard brass

Dimension	Item No.	DU 1	DU 2
16 x 12 mm	8611212	10 pc.	80 pc.
16 x 14 mm	8611210	10 pc.	80 pc.
20 x 16 mm	8611211	10 pc.	80 pc.
20 x 18 mm	8611205	10 pc.	80 pc.



TECElogo Eurocone clamped joint*

Clamped joint for TECElogo multi-layer composite pipe. For heating installations.

Dimension	Item No.	DU 1	DU 2
16 x 3/4" EC	8740216	10 pc.	200 pc.
20 x 3/4" EC	8740220	10 pc.	200 pc.



TECE Eurocone clamped joint for copper pipes*

Eurocone clamped joint for copper pipes 15 x 1 mm, with nickel-plated 3/4" union nut and Eurocone.

Dimension	Item No.	DU 1	DU 2
3/4" for copper pipe 15 x 1	8740439	2 pc.	100 pc.



TECElogo-Push pressure-testing plug with ventilation, standard brass

Dimension	Item No.	DU 1	DU 2
16	8640001	10 pc.	50 pc.



TECElogo-Push male connector Eurocone, standard brass

Male connector for 3/4" Eurocone clamp connection.

Dimension	Item No.	DU 1	DU 2
16 x 3/4"	8610108	10 pc.	100 pc.
20 x 3/4"	8610109	10 pc.	50 pc.



TECElogo-Push adapter screw connection with metallic sealing elements

Adapter screw connection for hard copper pipes.

Dimension	Item No.	DU 1	DU 2
16 x 15 mm Cu	8711206	10 pc.	100 pc.
20 x 22 mm Cu	8711207	10 pc.	100 pc.



TECE pipe connector 1/2" x 3/4" MT

Nickel-plated pipe connector 1/2" x 3/4" Eurocone to connect radiators.



Dimension	Item No.	DU 1	DU 2
1/2" x 3/4" EC	8740440	10 pc.	100 pc.

TECElogo – Push manifold

TECE stainless steel heating circuit manifold without flow rate indicator

Stainless steel radiator distribution manifold made of stainless-steel rectangular hollow section 40 x 1.5 mm, (grade 1.4301) in accordance with EN 10088, G 1" union nut on primary side, flat sealing, nickel-plated brass, distance to heating circuit 50 mm.


Fully pre-assembled feed and return with:

- Manifold bar with integrated control valves and black protective caps, in accordance with EN 1264-4, outgoing side with pipe connectors on G 3/4" male thread, inside cone in accordance with EN 16313, nickel-plated brass
- Two blanking plugs G 3/4", nickel-coated brass

Packaged in a sturdy carton including:

- Two dual wall brackets 200 x 54.4 x 34.5 with structure-borne sound insulation inserts (DIN 4109) incl. mounting material (1 dual wall bracket for manifold with 2 heating circuits)
- Two flat seals 1"

Version	a	Item No.	DU 1
2 heating circuits	152 mm	7 12540	1 pc.
3 heating circuits	202 mm	7 12541	1 pc.
4 heating circuits	252 mm	7 12542	1 pc.
5 heating circuits	302 mm	7 12543	1 pc.
6 heating circuits	352 mm	7 12544	1 pc.
7 heating circuits	402 mm	7 12545	1 pc.
8 heating circuits	452 mm	7 12546	1 pc.
9 heating circuits	502 mm	7 12547	1 pc.
10 heating circuits	552 mm	7 12548	1 pc.
11 heating circuits	602 mm	7 12549	1 pc.
12 heating circuits	652 mm	7 12550	1 pc.

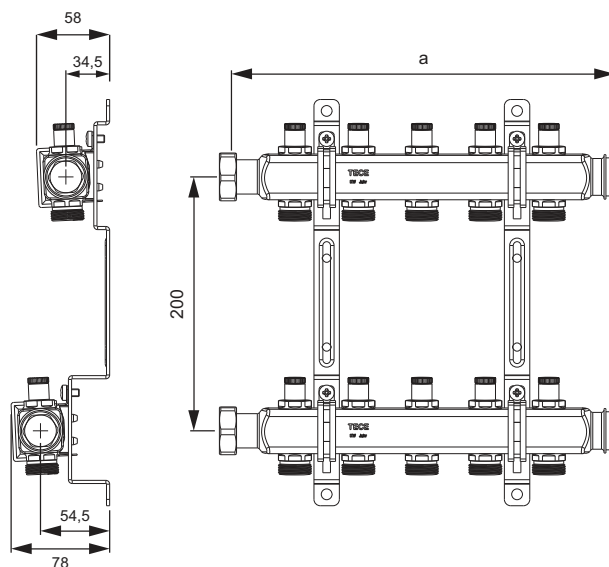

TECE stainless steel heating circuit manifold without flow rate indicator and control valves

Stainless steel radiator distribution manifold made of stainless-steel rectangular hollow section 40 x 1.5 mm (grade 1.4301) to EN 10088, with G 1" union nut on primary side, flat sealing, nickel plated brass, distance to heating circuit 50 mm.


Fully pre-assembled feed and return with:

- Manifold bar with pipe connectors on G 3/4" male thread, inside cone to EN 16313, nickel-plated brass
- Two blanking plugs G 3/4", nickel-plated brass
- Four blanking plugs G 1/2", nickel-plated brass

Packaged in a sturdy carton including:

- Two dual wall brackets 200 x 54.4 x 34.5 with structure-borne sound insulation inserts (DIN 4109) incl. mounting material (1 dual wall bracket for distributor with 2 heating circuits)
- Two flat seals 1"

Version	a	Item No.		DU 1
2 heating circuits	152 mm	712551	SALE	1 pc.
3 heating circuits	202 mm	712552	SALE	1 pc.
4 heating circuits	252 mm	712553	SALE	1 pc.
5 heating circuits	302 mm	712554	SALE	1 pc.
6 heating circuits	352 mm	712555	SALE	1 pc.
7 heating circuits	402 mm	712556	SALE	1 pc.
8 heating circuits	452 mm	712557	SALE	1 pc.
9 heating circuits	502 mm	712558	SALE	1 pc.
10 heating circuits	552 mm	712559	SALE	1 pc.
11 heating circuits	602 mm	712560	SALE	1 pc.
12 heating circuits	652 mm	712561	SALE	1 pc.

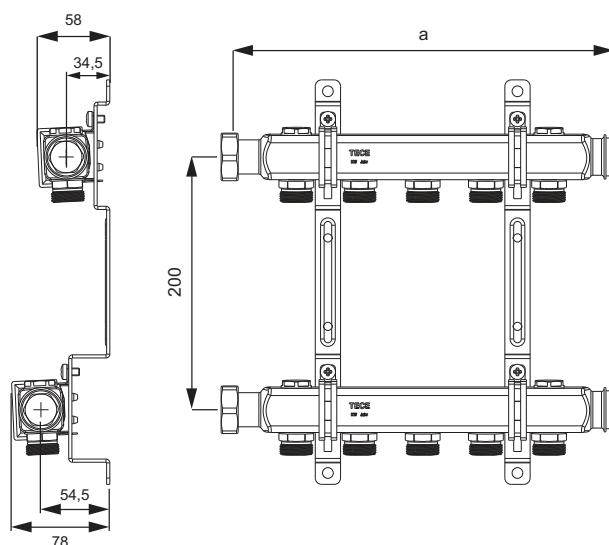

TECE fill and drain set with ventilation function 3/4" for TECE heating circuit manifold

Item No.		DU 1
712562	SALE	1 set



TECElogo-Push manifold, shut-off, standard brass*

TECElogo-Push manifold dimension 16 with shut-offs.

Dimension	Item No.	DU 1	DU 2
3/4" x 16 Two-way	8730008	1 pc.	24 pc.
3/4" x 16 Three-way	8730009	1 pc.	24 pc.



TECElogo – Push manifold

TECE universal manifold, with shut-off, standard brass

TECE manifold, valve with shut-off FT/MT, outlet 3/4" Eurocone.

Dimension	Item No.	DU 1	DU 2
3/4" x 3/4" EC Two-way	8730006	1 pc.	24 pc.
3/4" x 3/4" EC Three-way	8730007	1 pc.	24 pc.
1" x 3/4" EC Two-way	8730010	1 pc.	24 pc.
1" x 3/4" EC Three-way	8730011	1 pc.	24 pc.
1" x 3/4" EC four-way	8730040	1 pc.	12 pc.



TECE double bracket for 3/4" and 1" manifold

Robust bracket for mounting the 3/4" and 1" TECE manifold with sound insulation inserts.

Item No.	DU 1	DU 2
8730014	1 set	25 set



TECElogo-Push manifold, standard brass*

Dimension	Item No.	DU 1	DU 2
R 3/4" x Rp 3/4" x 16 Two-way	8630002	1 pc.	20 pc.
R 3/4" x R 3/4" x 16 Three-way	8630003	1 pc.	20 pc.



TECElogo-Push universal manifold, red brass/silicon bronze

Universal manifold, 3/4" without cap and stopper, with 20 mm plug-in male thread for TECElogo push-fittings with integrated grip function. For potable water and heating installations.

Dimension	Item No.	DU 1	DU 2
R 3/4" x Rp 3/4" x 20 Two-way	8733002	1 pc.	20 pc.
R 3/4" x Rp 3/4" x 20 Three-way	8733003	1 pc.	20 pc.



TECElogo flush-mounted ball valve with handwheel*

Flush-mounted ball valve for shutting off TECElogo pipes. Body and screw-in part made of standard brass in accordance with EN 12164. Spindle with 2 O-rings, providing better guiding of the spindle and double safety. Ball made of chrome-plated brass. Ball sleeve made of PTFE. Full penetration, therefore minimum loss of pressure.

Max. permanent operating temperature: 90 °C. Pressure rating: 10 bar.

Design:

- TECElogo connection on both sides
- With covering anchor plate and handle (chrome-plated)
- With colour coding (red/blue)



Dimension	Item No.	DU 1	DU 2
16	8780016	1 pc.	10 pc.
20	8780020	1 pc.	10 pc.

TECElogo flush-mounted ball valve with dummy cap*

Flush-mounted ball valve for shutting off TECElogo pipes. Body and screw-in part made of standard brass in accordance with EN 12164. Spindle with 2 O-rings, providing better guiding of the spindle and double safety. Ball made of chrome-plated brass. Ball sleeve made of PTFE. Full penetration, therefore minimum loss of pressure.

Max. permanent operating temperature: 90 °C

Pressure rating: 10 bar

Design:

- TECElogo connection on both sides
- Covering anchor plate and dummy cap (chrome-plated)
- Key for shut-off
- Colour coding (red/blue)



Dimension	Item No.	DU 1	DU 2
16	8780116	1 pc.	10 pc.
20	8780120	1 pc.	10 pc.

TECE flush-mounted extension, 23 mm

Flush-mounted extension 23 mm for concealed ball valves 1/2".

Dimension	Item No.	DU 1	DU 2
1/2"	8780200	1 pc.	20 pc.



TECE pipe clip made of polyamide, white

One-piece pipe clip made of white polyamide. Pipe clip closes when pipe is pressed in. Thanks to patented lateral guides, two or more clips can be joined together.

Note:

Not permitted for gas installation!



Dimension	Item No.	DU 1	DU 2
14	785036	100 pc.	2000 pc.
16	785037	100 pc.	2000 pc.
20	785038	50 pc.	1000 pc.
25	785039	50 pc.	1000 pc.
32	785040	50 pc.	1000 pc.
40	785041	25 pc.	250 pc.

TECElogo-Push tool case

Tool case with pipe scissors, calibrating and chamfering tools, handle and disassembly tools.

Dimension	Item No.	DU 1
16-25	8760001	1 pc.
32-50	8760007*	1 pc.
32-40	8760010**	1 pc.

**TECE pipe cutter**

Dimension	Item No.	DU 1
14-25	8760002	1 pc.

**TECElogo-Push calibration and chamfering tool**

Dimension	Item No.	DU 1
16	8760016	1 pc.
20	8760020	1 pc.
25	8760025	1 pc.
32	8760032	1 pc.
40	8760040	1 pc.
50	8760050	1 pc.
63	8760063	1 pc.

**TECElogo-Push handle for calibration and chamfering tool**

Dimension	Item No.	DU 1
16-63	8760000	1 pc.

**TECElogo-Push quick change tool holder for calibration and chamfering tool**

Quick change tool holder for use in cordless screwdrivers and drills. Facilitates rapid exchange of calibration tools.

Dimension	Item No.	DU 1
16-63	8760005	1 pc.

**TECElogo-Push disassembly key 16/20**

Dimension	Item No.	DU 1
16/20	8760103	1 pc.



* It is possible to extend the tool case 32-50 to include dimension 63.

** It is possible to extend the tool case 32-40 to include dimensions 50 and 63.

TECElogo-Push disassembly key

Dimension	Item No.	DU 1
25	8760125	1 pc.
32	8760132	1 pc.
40	8760140	1 pc.
50	8760150	1 pc.
63	8760163	1 pc.



TECElogo-Push disassembly open-end wrench

Dimension	Item No.	DU 1
16	8760416	1 pc.
20	8760420	1 pc.
25	8760425	1 pc.
32	8760432	1 pc.
40	8760440	1 pc.
50	8760450	1 pc.
63	8760463	1 pc.



TECElogo-Push tool bag

Rugged tool bag for TECElogo tools 16-25 mm, attaches to a belt. TECElogo-Push tools are not included.

Item No.	DU 1
8760011	1 pc.



TECE bending machine dimension 16-32 mm

Compact, one-hand pipe bender, dimension 16-32 mm for TECEflex and TECElogo multi-layer composite pipes to produce consistent pipe bends. Complete with case, with matrices for 16/20/25/32 mm. Bending angle 0-90°.

Item No.	DU 1
720222	1 pc.



TECE bending machine dimension 40-63 mm

Manually operated hydraulic bending machine for TECEflex and TECElogo multi-layer composite pipes, dimensions 40-63 mm for use on-site or prefabrication. Complete with wooden box, with matrices for 40/50/63 mm. Bending angle 0-90°.

Item No.	DU 1
720223	1 pc.



TECElogo outer bending spring

Outer bending spring for ISO composite pipe.

Dimension	Item No.	DU 1
16	8760316	1 pc.
20	8760320	1 pc.
25	8760325	1 pc.

**TECE pipe cutter**

Dimension	Item No.	DU 1
14-63	8760008	1 pc.

**TECElogo pipe holding pliers**

Pipe holding pliers with grip-lock to securely hold 16-25 mm TECElogo pipes during calibration process.

Dimension	Item No.	DU 1
16-25	8760006	1 pc.

**TECE laying winder**

Laying winder, foldable, variably adjustable for TECEfloor, TECEflex and TECElogo rolls up 600 m length.

Dimension	Item No.	DU 1
up to 600 m	720193	1 pc.

**TECE pipe straightener**

To be mounted on the laying winder for straight removal of 16 and 20 mm TECEflex and TECElogo composite pipes.

Dimension	Item No.	DU 1
16 and 20	720194	1 pc.



TECElogo – Starter set

TECElogo-Push starter set (red brass/silicon bronze/PPSU)

Assortment case with common components of the TECElogo-Push assortment (dimension 16) and tools. Threaded components made of red brass/silicon bronze.


Pos.	Item No.	Designation	Quantity
1	8713002	Female connector 16 x Rp 1/2"	10
2	8713102	Male connector 16 x R 1/2"	10
3	8710716	Elbow 90° 16 x 16	10
4	8710916	Tee 16 x 16 x 16	10
5	8723002	Wall disk 16 x Rp 1/2"	10
6	8760002	Pipe cutter 16-25	1
7	8760016	Calibration and chamfering tool 16	1
8	8760000	Handle 16-63	1
9	8760103	Disassembly key 16/20	1
10	8760416	Disassembly open-end wrench 16	1

Item No.	DU 1
8790003	1 pc.




TECElogo-Push screw connection flat sealing, red brass/silicon bronze

Pos.	Item No.	Designation	DU 1
1	8790201	1/2" flat gasket for flat-sealing connectors	10 pc.
	8790202	3/4" flat gasket for flat-sealing connectors	10 pc.
2	8790116	O-ring, dim. 16	10 pc.
	8790120	O-ring, dim. 20	10 pc.




TECElogo-Push elbow coupling flat sealing, standard brass

Pos.	Item No.	Designation	DU 1
1	8790202	3/4" flat gasket for flat-sealing connectors	10 pc.
	8790201	1/2" flat gasket for flat-sealing connectors	10 pc.




TECE Seal System assembly plug with sealing sleeve

Pos.	Item No.	Designation	DU 1
1	704808	O-ring for assembly plug 1/2"	10 pc.
	704814	O-ring for assembly plug 3/4"	10 pc.




TECElogo flush-mounted ball valve with handwheel

Pos.	Item No.	Designation	DU 1
1	8780000	Handwheel	1 pc.




TECElogo flush-mounted ball valve with dummy cap

Pos.	Item No.	Designation	DU 1
1	8780100	Dummy cap	1 pc.



8760002 – TECE pipe cutter


Pos.	Item No.	Designation	DU 1
1	8760003	Spare blade for pipe cutter	1 pc.



TECElogo – Spare parts

8760008 – TECE pipe cutter

Pos.	Item No.	Designation	DU 1
1	8760009	Replacement cutting wheel for pipe cutter	1 pc.



TECElogo-Push O-rings


Dimension	Item No.	DU 1	DU 2
16	8790116	10 pc.	100 pc.
20	8790120	10 pc.	500 pc.
25	8790125	10 pc.	100 pc.
32	8790132	10 pc.	100 pc.
40	8790140	10 pc.	100 pc.
50	8790150	10 pc.	100 pc.
63	8790163	10 pc.	100 pc.



TECElogo system pipe	Composite pipe						
Pipe designation	PE-RT/Al/PE-RT				PE-Xc/Al/PE-RT		
Size	16	20	25	32	40	50	63
Delivery lengths of roll (m)	100	100	50	--	--	--	--
Straight lengths (m) (5 m/length)	100	70	45	30	15	15	5
Field of application*	TWA, HKA, FBH*		TWA, HKA				
Application class/operating pressure	2/10 bar; 5/10 bar						
Colour	white						
Outside diameter (mm)	16	20	25	32	40	50	63
Wall thickness (mm)	2	2.25	2.5	3	4	4.5	6
Inside diameter (mm)	12	15.5	20	26	32	41	51
Fitting insertion (mm)	27	32	35	46	48	48	55
Available in corrugated protective pipe	yes			--			
Available with insulation λ = 0.040 W/(m · K) - 6 mm - 9 mm - 13 mm - 26 mm	yes yes yes yes			-- -- -- --			
Pipe weight empty (kg/m)	0.10	0.14	0.20	0.26	0.53	0.79	1.22
Internal volume (dm ³ /m)	0.11	0.19	0.31	0.53	0.80	1.32	2.04
Pipe roughness (mm)	0.007						
Uninsulated heat conductivity (W/(m ² · K))	0.42						
Coefficient of thermal expansion (mm/(m · K))	0.026						
Minimum bending radius (mm) - without bending spring - with bending spring	80 64	100 80	125 100	160 --	200 --	250 --	315 --

* TWA – potable water system; HKA – radiator connection; FBH – floor heating.

Application limits of fittings made of standard brass for drinking water installations

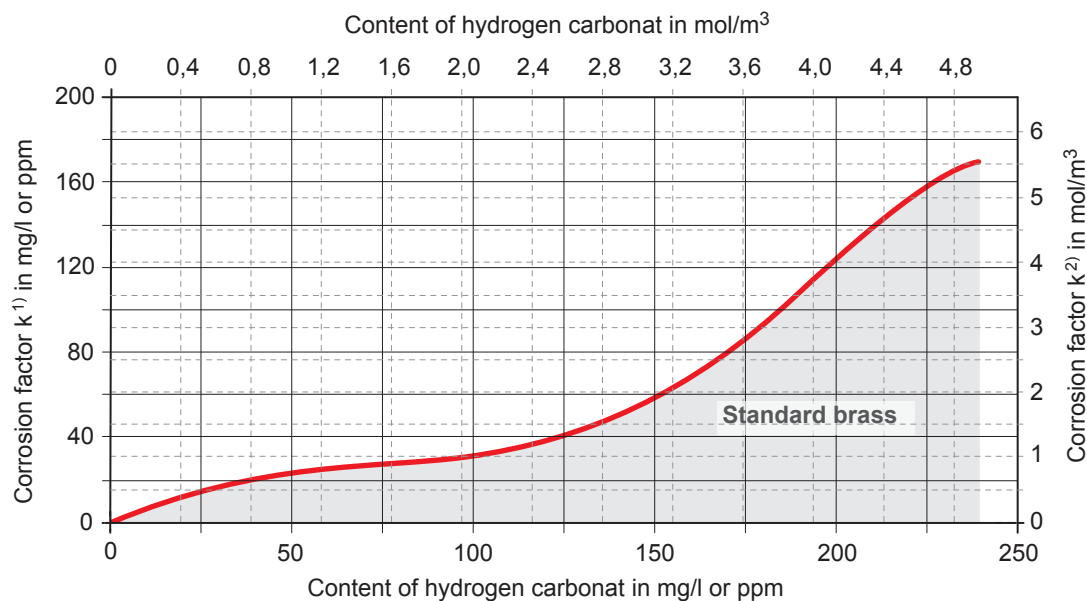

1) k = content of chlorid Cl + 1/3 content of sulphate SO_4 (in mg/l)

2) k = content of chlorid Cl + content of sulphate SO_4 (in mol/m³)

For water qualities that are above the limit curve, dezincification corrosion for standard brass is to be expected. They must not be used for these water qualities.

Classification of the operating conditions (according to ISO 10508)

Application class	Calculation temperature T_D °C	Operating period ^b at T_D years ^a	T_{max} °C	Operating period at T_{max} years	T_{mal} °C	Operating period at T_{mal} hours	Typical application range
1 ^a	60	49	80	1	95	100	Hot water supply (60 °C)
2 ^a	70	49	80	1	95	100	Hot water supply (70 °C)
3 ^c	20	0.5	50	4.5	65	100	Low temperature floor heating
	30	20					
	40	25					
4 ^b	20	2.5	70	2.5	100	100	Floor heating and low temperature radiator connection
	40	20					
	60	25					
5 ^b	20	14	90	1	100	100	High temperature radiator connection
	60	25					
	80	10					

T_D = Temperature for which the pipe is designed. T_{max} = Maximum temperature which may occur for a short period


T_{mal} = Highest possible "one-off" temperature which may occur during a breakdown (maximum 100 hours in 50 years)

^a Depending on its national regulations, a country may choose either class 1 or class 2.

^b For an application class, if more than one calculated temperature results for the operating period and its temperature, the associated times for the operating period should be added. "Plus cumulative" in the table implies a temperature group for the temperature given for an operating period (e.g. the temperature group for a period of 50 years for class 5 is made up as follows: 20 °C for 14 years, followed by 60 °C for 25 years, followed by 80 °C for 10 years, followed by 90 °C for 1 year, followed by 100 °C for 100 h).


^c Only allowed if the breakdown event temperature cannot rise above 65 °C.

TECElogo-Push female connector



Dimension	Red brass/silicon bronze				Standard brass			
	Item No.	Z1	L1	SW	Item No.	Z1	L1	SW
16 x Rp 1/2"	8713002	17	58	25	8610002	17	58	25
20 x Rp 1/2"	8713003	16	62	25	8610003	16	62	25
20 x Rp 3/4"	8713004	16	64	31	8610004	16	64	31
25 x Rp 1"	8713006	16	69	38	8610006	16	69	38
25 x Rp 3/4"	8713005	16	66	31	8610005	16	66	31
32 x Rp 1"	8713007	19	85	38	8610007	19	85	38
40 x Rp 1 1/2"	8713008	21	91	53	8610008	21	91	53
50 x Rp 2"	8713009	23	97	67	8610009	23	97	67
63 x Rp 2"	8713010	23	106	67	-	-	-	-


TECElogo-Push male connector

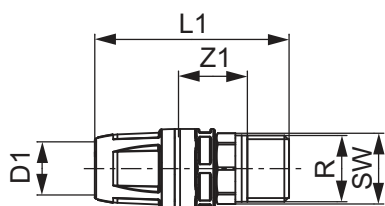

Dimension	Red brass/silicon bronze				Standard brass			
	Item No.	Z1	L1	SW	Item No.	Z1	L1	SW
16 x R 1/2"	8713102	22	62	21	8610102	22	62	21
16 x R 3/4"	8713103	22	63	27	8610103	21	62	27
16 x R 3/8"	-	-	-	-	8610100	21	58	19
20 x R 1/2"	8713104	22	67	21	8610104	21	66	21
20 x R 3/4"	8713105	20	66	27	8610105	21	67	27
25 x R 1"	8713107	21	72	34	8610107	20	72	34
25 x R 3/4"	8713106	20	69	27	8610106	20	69	27
32 x R 1"	8713108	26	89	34	8610116	26	89	34
40 x R 1 1/4"	8713109	26	94	42	8610117	26	94	42
50 x R 1 1/2"	8713110	26	95	48	8610118	26	95	48
63 x R 2"	8713111	30	110	60	-	-	-	-


TECElogo-Push coupling, PPSU

Dimension	Item No.	Z1	L1
16 x 16	8710516	24	77
20 x 20	8710520	24	87
25 x 25	8710525	24	93
32 x 32	8710532	32	124
40 x 40	8710540	32	128
50 x 50	8710550	32	128
63 x 63	8710563	43	150

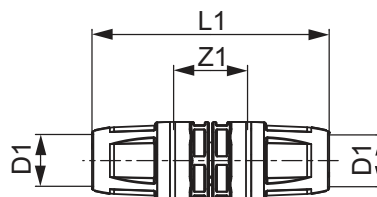


TECElogo-Push coupling reduced, PPSU

Dimension	Item No.	Z1	L1
20 x 16	8710616	24	82
25 x 16	8710620	24	85
25 x 20	8710625	24	90
32 x 20	8710632	28	106
32 x 25	8710633	28	109
40 x 32	8710640	32	126
50 x 40	8710650	32	129
63 x 50	8710663	37	140

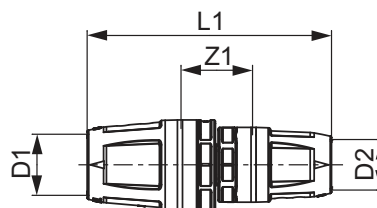


TECElogo-Push 90° elbow, PPSU

Dimension	Item No.	Z1	L1
16 x 16	8710716	25	51
20 x 20	8710720	27	58
25 x 25	8710725	32	66
32 x 32	8710732	38	83
40 x 40	8710740	41	91
50 x 50	8710750	47	97
63 x 63	8710763	65	119

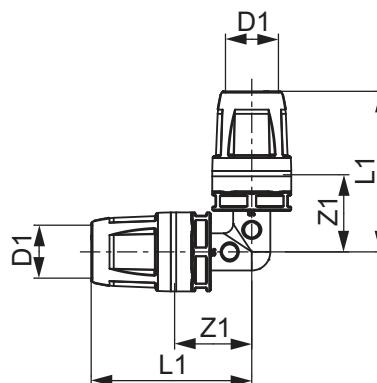


TECElogo-Push insertion elbow 90°, PPSU

Dimension	Item No.	Z1	Z2	L1	L2
16 x 16	8711116	22	16	48	43
20 x 20	8711120	23	18	55	49
25 x 25	8711125	26	20	60	55

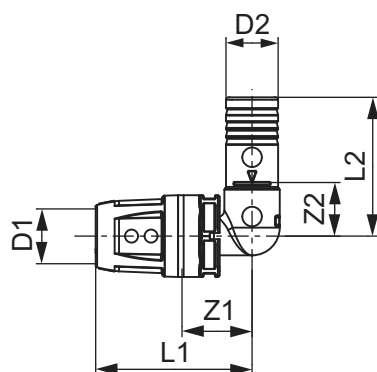


TECElogo-Push elbow 45°, red brass/silicon bronze

Dimension	Item No.	Z1	L1
25 x 25	8711225	22	57
32 x 32	8711232	27	73
40 x 40	8711240	31	79
50 x 50	8711250	32	80
63 x 63	8711263	41	95

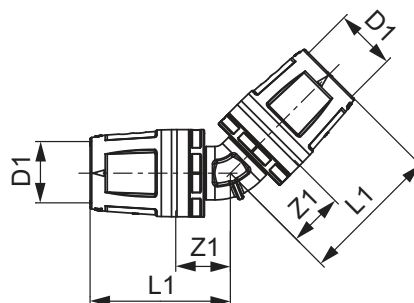


TECElogo-Push female elbow

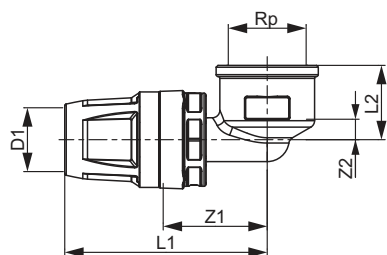


Dimension	Red brass/silicon bronze					Standard brass				
	Item No.	Z1	Z2	L1	L2	Item No.	Z1	Z2	L1	L2
16 x Rp 1/2"	8713202	28	8	55	20	8610202	28	8	55	20
20 x Rp 1/2"	8713203	28	8	59	20	8610203	28	8	59	20
20 x Rp 3/4"	8713204	31	10	62	23	8610204	31	10	62	23
25 x Rp 3/4"	8713205	31	14	66	30	8610205	31	14	66	30
32 x Rp 1"	8713206	40	16	86	35	8610206	40	16	86	35

TECElogo-Push male elbow

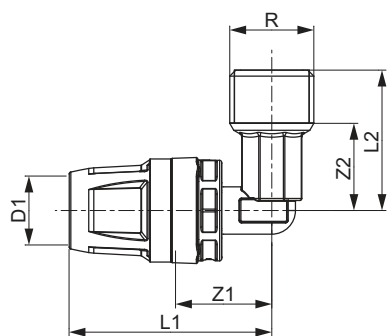

Dimension	Red brass/silicon bronze					Standard brass				
	Item No.	Z1	Z2	L1	L2	Item No.	Z1	Z2	L1	L2
16 x R 1/2"	8713302	24	22	51	35	8610302	24	22	51	35
20 x R 1/2"	8713303	24	22	56	35	8610303	24	22	56	35
20 x R 3/4"	8713304	27	22	59	36	8610304	27	22	59	36
25 x R 1"	8713306	31	28	65	45	8610306	31	28	65	45
25 x R 3/4"	8713305	27	27	62	41	8610305	27	27	62	41
32 x R 1"	8713307	36	28	82	45	8610312	36	28	82	45


TECElogo-Push tee female thread

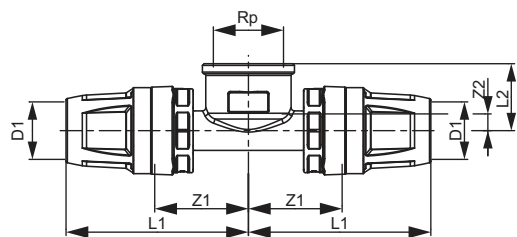

	Red brass/silicon bronze					Standard brass				
Dimension	Item No.	Z1	Z2	L1	L2	Item No.	Z1	Z2	L1	L2
16 x Rp 1/2" x 16	8713402	28	5	55	20	8610402	28	5	55	20
20 x Rp 1/2" x 20	8713403	28	5	60	20	8610403	28	5	60	20
25 x Rp 3/4" x 25	8713404	31	14	66	30	8610404	31	14	66	30
32 x Rp 1" x 32	8713405	36	13	86	32	8610406	36	13	86	32
40 x Rp 1" x 40	8713406	39	14	87	33	8610408	39	14	87	33
50 x Rp 1 1/4" x 50	8713407	44	18	92	39	8610410	44	18	92	39
63 x Rp 1 1/2" x 63	8713408	60	31	114	52	-	-	-	-	


TECElogo-Push tee, PPSU

Dimension	Item No.	Z1	Z2	L1	L2
16 x 16 x 16	8710916	19	26	46	52
20 x 20 x 20	8710920	21	28	53	60
25 x 25 x 25	8710925	23	31	58	66
32 x 32 x 32	8710932	28	39	74	85
40 x 40 x 40	8710940	31	45	79	93
50 x 50 x 50	8710950	36	52	84	100
63 x 63 x 63	8710963	60	60	118	118

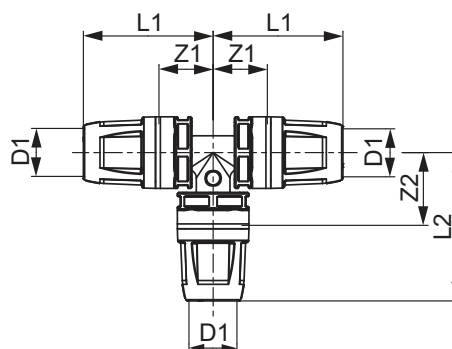


TECElogo-Push tee reduced, PPSU

Dimension	Item No.	Z1	Z2	Z3	L1	L2	L3
20 x 16 x 16	8711004	20	28	20	51	55	46
20 x 16 x 20	8711005	20	28	20	51	55	51
20 x 20 x 16	8711006	21	28	21	53	60	48
25 x 16 x 16	8711007	19	31	19	54	58	46
25 x 16 x 25	8711008	19	31	19	54	58	54
25 x 20 x 20	8711009	21	31	21	56	63	53
25 x 20 x 25	8711010	21	31	21	56	63	56
20 x 25 x 20	8711011	23	28	23	55	63	55
32 x 16 x 32	8711012	22	36	22	68	62	68
32 x 20 x 32	8711013	24	36	24	70	67	70
32 x 25 x 32	8711014	26	36	26	72	70	72
32 x 25 x 25	8711015	26	36	23	72	70	57
40 x 25 x 40	8711017	26	41	26	74	76	74
40 x 32 x 40	8711018	28	45	28	76	91	76
40 x 32 x 32	8711019	28	45	28	76	91	74
50 x 25 x 50	8711020	26	48	26	74	83	74
50 x 32 x 50	8711021	28	52	28	76	98	76
63 x 32 x 63	8711022	41	59	41	99	105	99
63 x 50 x 63	8711023	53	59	53	111	107	111

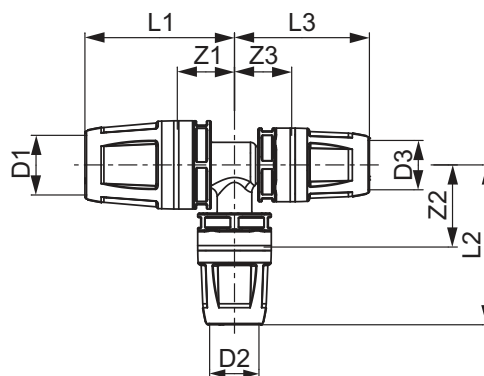


TECElogo-Push end plug, PPSU

Dimension	Item No.	Z1	L1
16	8710817	12	38
20	8710821	12	44




TECElogo-Push pressing adapter, red brass/silicon bronze

Dimension	Item No.	Z1	L1	L2
16 x 15 mm	8730100	12	39	27
20 x 18 mm	8730101	12	44	27
25 x 22 mm	8730102	12	47	27




TECElogo-Push screw connection, flat sealing

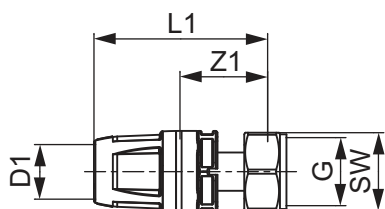

Dimension	Red brass/silicon bronze					Standard brass				
	Item No.	Z1	L1	G	SW	Item No.	Z1	L1	G	SW
16 x 1/2"	8733201	27	54	1/2"	24	8630201	27	54	1/2"	24
16 x 3/4"	8733202	28	54	3/4"	29	8630202	28	54	3/4"	29
16 x 3/8"	-	-	-	-	-	8630200	27	54	3/8"	19
20 x 3/4"	8733203	28	59	3/4"	29	8630203	28	59	3/4"	29
25 x 1"	8733204	32	67	1"	37	8630204	32	67	1"	37
32 x 1 1/4"	8733205	37	84	1 1/4"	46	8630205	37	84	1 1/4"	46
40 x 1 1/2"	-	-	-	-	-	8630207	40	88	1 1/2"	52


TECElogo-Push elbow coupling flat sealing, standard brass

Dimension	Item No.	Z1	Z2	L1	G	SW
16 x 3/8"	8730215	22	24	49	3/8"	19
16 x 1/2"	8730216	27	25	53	1/2"	24




TECElogo-Push quick adapter, silicon bronze

Dimension	Item No.	Z1	L1	G
16 x 1/2"	8730310	3	32	1/2"

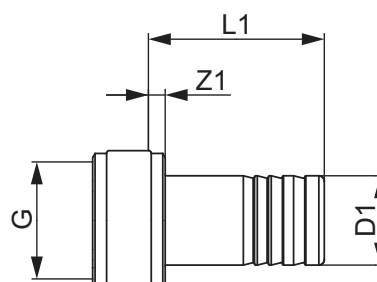


TECElogo-Push wall disk

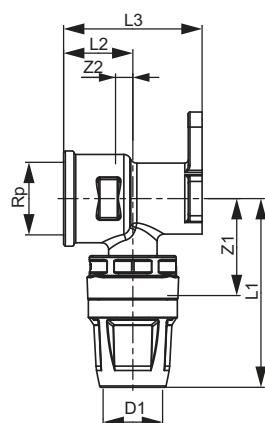

Dimension	Red brass/silicon bronze						Standard brass					
	Item No.	Z1	Z2	L1	L2	L3	Item No.	Z1	Z2	L1	L2	L3
16 x Rp 1/2"	8723002	28	5	55	20	40	8620002	28	5	55	20	40
20 x Rp 1/2"	-	-	-	-	-	-	8620003	28	5	60	20	40


TECElogo-Push universal wall disk, red brass/silicon bronze

Dimension	Item No.	Z1	Z2	L1	L2	L3
20 x Rp 1/2"	8723003	19	17	51	32	52

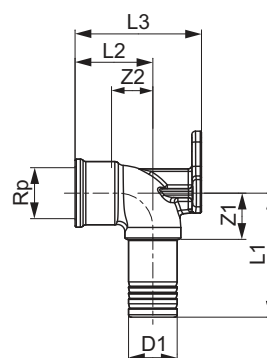


TECElogo-Push double wall disk, standard brass

Dimension	Item No.	Z1	Z2	L1	L2	L3
16 x Rp 1/2" x 16	8620007	35	5	62	20	40

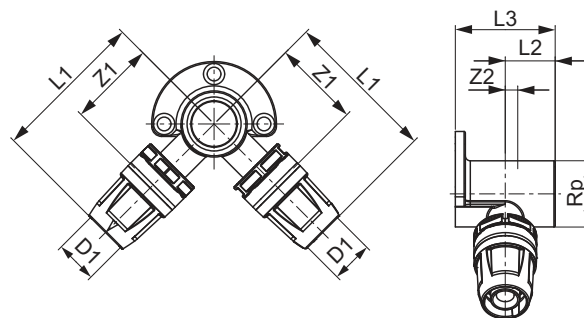


TECElogo-Push double wall disk, silicon bronze

Dimension	Item No.	Z1	Z2	L1	L2	L3
16 x Rp 1/2" x 16	8723014	35	5	62	20	40

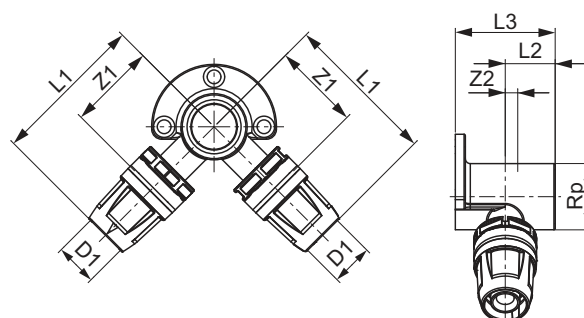


TECElogo-Push universal double wall disk, red brass/silicon bronze

Dimension	Item No.	Z1	Z2	L1	L2	L3	L4
20 x Rp 1/2" x 20	8723011	33	11	64	26	45	45

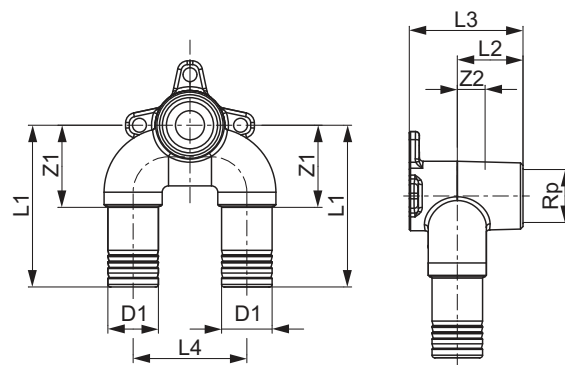


TECElogo-Push wall disk long, standard brass

Dimension	Item No.	Z1	Z2	L1	L2	L3
16 x Rp 1/2"	8620008	28	9	55	49	69

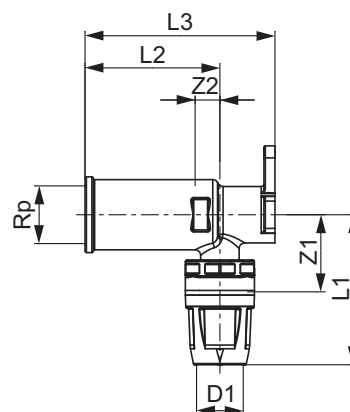


TECElogo-Push universal wall disk, long, red brass/silicon bronze

Dimension	Item No.	Z1	Z2	L1	L2	L3
20 x Rp 1/2"	8723008	20	19	51	67	87

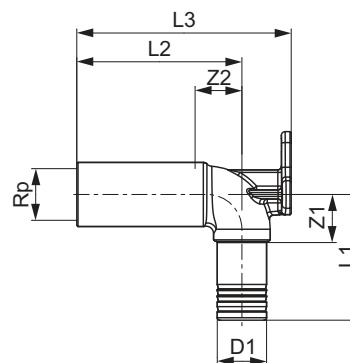

TECElogo-Push universal wall bushing, red brass/silicon bronze


Dimension	Item No.	Z1	L1	L2
16 x Rp 1/2"	8723009	11	63	18-25



TECElogo – Dimensional drawings


TECElogo-Push push-fit wall bushing with attachment nuts 3/4"

Dimension	Item No.	Z1	L1	L2	SW
16 x Rp 1/2"	8723012	8	83	37	30
20 x Rp 1/2"	8723013	8	87	37	30

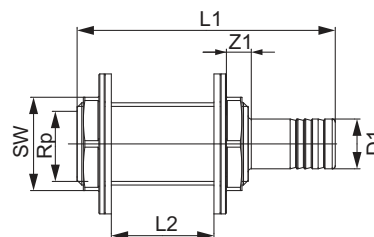


TECElogo-Push plug-in coupling, DR brass

Dimension	Item No.	Z1	L1
25 x 20	8730028	9	74




TECElogo-Push push-in stopper

Dimension	Item No.	L1
16	8730032	31




TECElogo-Push joint adapter for TECO FASTEC, standard brass

Dimension	Item No.	Z1	L1
20	8730050	3	48




TECE Seal System assembly plug with filling and emptying valve with sealing sleeve

Dimension	Item No.	Z1	L1	G	SW
1/2"	704809	138	174	1/2"	27




TECE fastener made of galvanized steel, single

Item No.	L1	L2	L3	L4
720527	40	150	70	47




TECE fastener made of galvanized steel, double

Item No.	L1	L2	L3	L4
720528	40	390	230	54

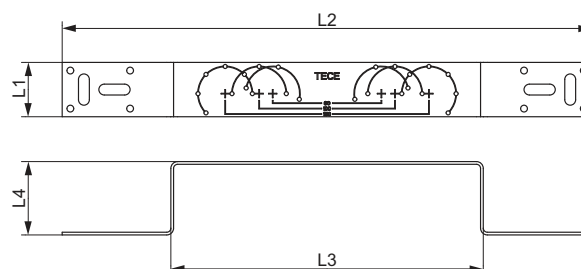


TECE fastener made of galvanized steel, double

Item No.	L1	L2	L3	L4
721005	50	417	263	43

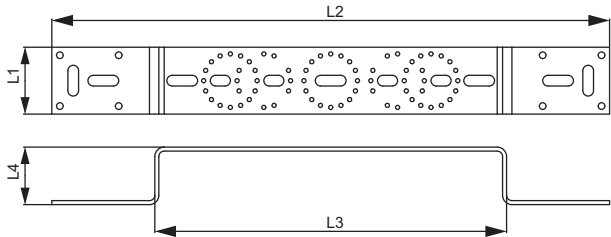


TECE screw

Dimension	Item No.	L1
3,5 x 16 mm	720524	16




TECElogo-Push mounting unit, red brass/silicon bronze

Dimension	Item No.	L1	L2	L3	L4
16 x Rp 1/2"	8723101	80	308	144	54

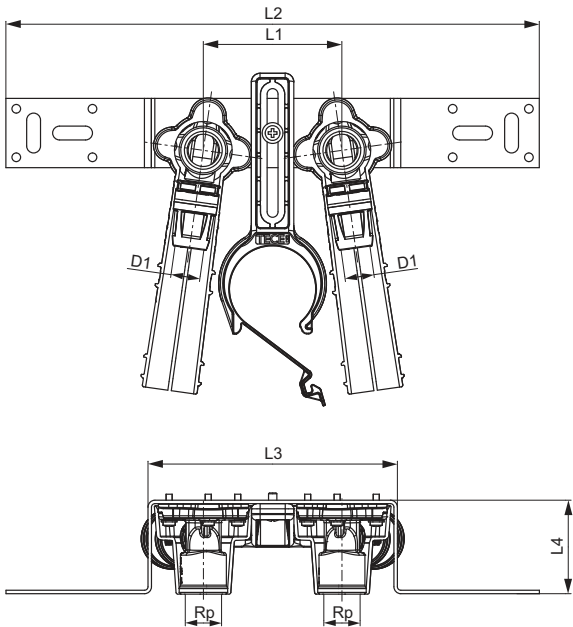

TECElogo-Push mounting unit, red brass/silicon bronze


Dimension	Item No.	L1	L2	L3	L4
16 x Rp 1/2"	8723100	150	390	230	54

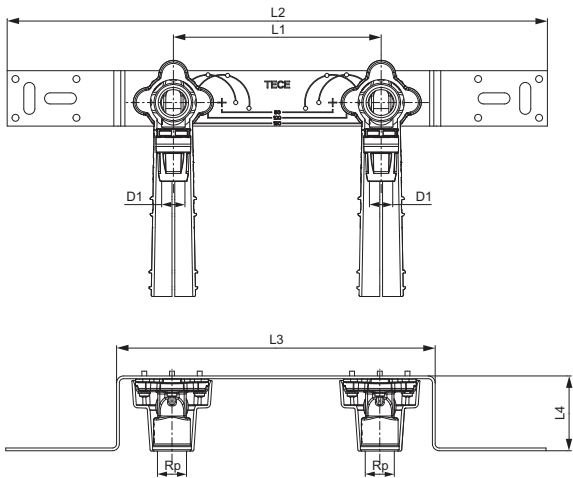

TECElogo – Dimensional drawings


TECElogo-Push universal mounting, red brass/silicon bronze

Dimension	Item No.	L1	L2	L3	L4
20 x 1/2"	8723102	150	390	230	54

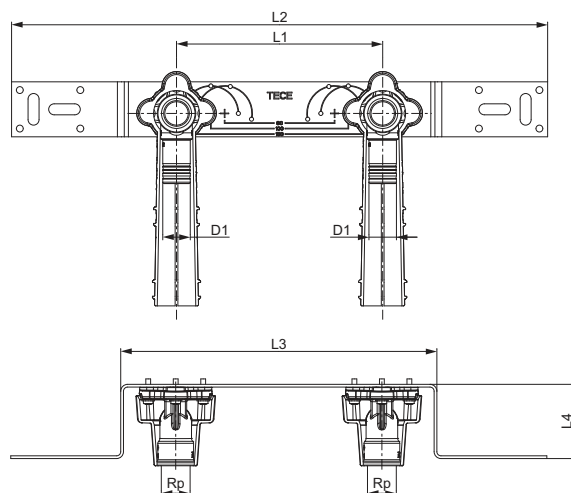


TECElogo-Push mounting unit standard brass

Dimension	Item No.	L1	L2	L3	L4
16 x Rp 1/2"	8620100	150	390	230	54

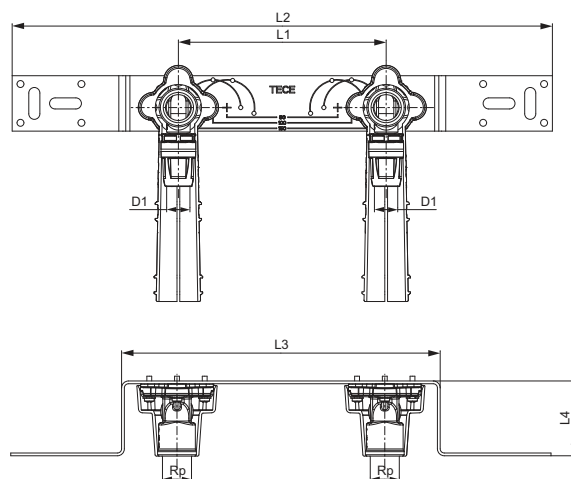


TECElogo-Push mounting unit standard brass

Dimension	Item No.	L1	L2	L3	L4
16 x 1/2"	8620103	153	203	95	35

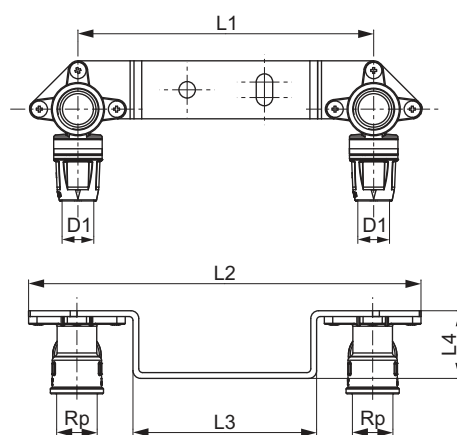


TECElogo-Push radiator mounting elbow

Dimension	Item No.	Z1	L1	L2
16 x 15 mm Cu	8740401	75	102	289
20 x 15 mm Cu	8740402	75	107	289

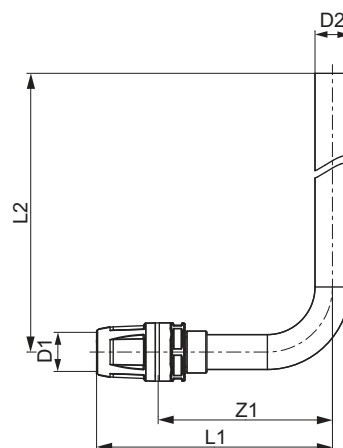


TECElogo-Push radiator mounting tee

Dimension	Item No.	Z1	L1	L2
16 x 15 mm Cu	8740403	43	96	270
20 x 15 mm Cu	8740404	43	106	270

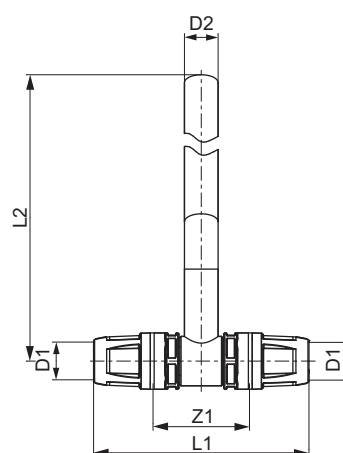


TECElogo-Push radiator mounting set

Dimension	Item No.	Z1	L1	L2	L3	L4
16 x 15 mm Cu	8740405	22	49	50	334	120

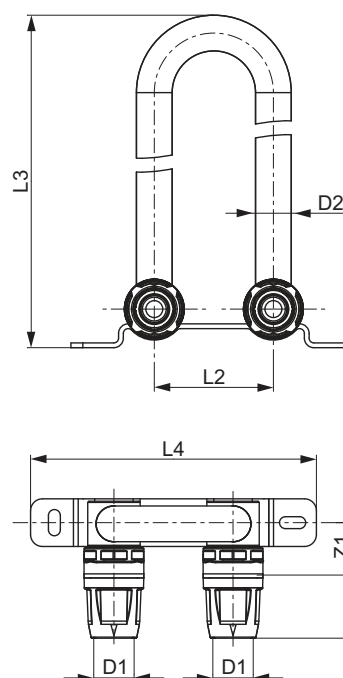


TECElogo-Push radiator mounting set

Dimension	Item No.	Z1	L1	L2	L3	L4
16 x 15 mm Cu	8740406	22	49	50	225	240

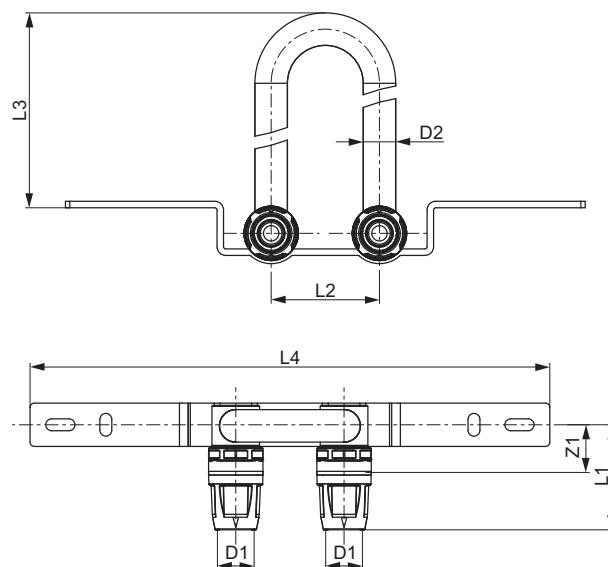


TECE skirting board radiator elbow shut-offs

Dimension	Item No.	L1	L2
15 mm Cu	730010	95	120

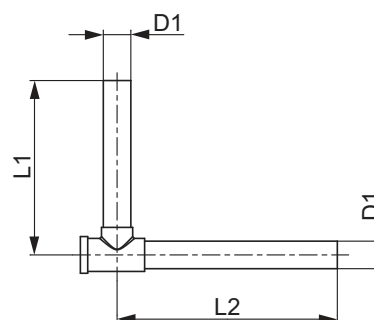


TECE skirting board radiator elbows

Dimension	Item No.	L1	L2
15 mm Cu	730025	155	75

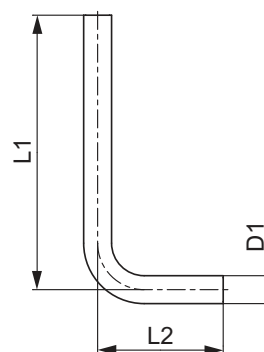


TECE male pinch screw connection 1/2"

Dimension	Item No.	G	SW
15 mm x R 1/2"	717501	1/2"	22




TECE two-pipe valve block for HC, through type

Dimension	Item No.	L1	G
3/4" EC x 3/4" EC	8740435	50	3/4"




TECE two-pipe valve block for HC, corner type

Dimension	Item No.	L1	G
3/4" EC x 3/4" EC	8740436	50	3/4"

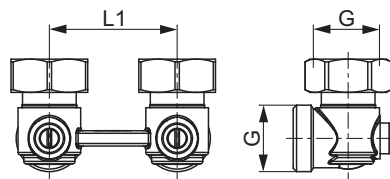


TECE two-pipe valve block for HC 1/2" MT, through type

Dimension	Item No.	L1	G
3/4" EC x R 1/2"	8740437	50	3/4"




TECE two-pipe valve block for HC 1/2" MT, corner type

Dimension	Item No.	L1	G
3/4" EC x R 1/2"	8740438	50	3/4"

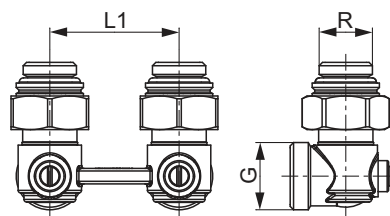

TECElogo radiator mounting unit

Dimension	Item No.	L1	L2	L3	L4
16	8740550	50	500	210	159

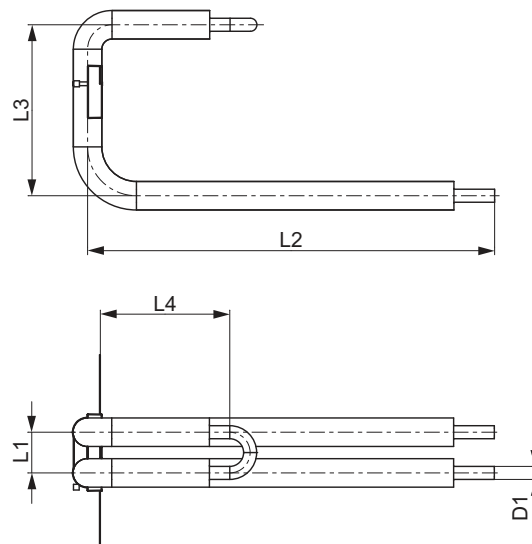

TECElogo – Dimensional drawings


TECElogo-Push adapter screw connection, standard brass

Dimension	Item No.	SW
20 x 18 mm	8611205	27
16 x 14 mm	8611210	27
20 x 16 mm	8611211	27
16 x 12 mm	8611212	27




TECElogo Eurocone clamped joint

Dimension	Item No.	G	SW
16 x 3/4" EC	8740216	3/4"	27
20 x 3/4" EC	8740220	3/4"	27




TECE Eurocone clamped joint for copper pipes

Dimension	Item No.	G	SW
3/4" for copper pipe 15 x 1	8740439	3/4"	27




TECElogo-Push pressure-testing plug with ventilation, standard brass

Dimension	Item No.	L1
16	8640001	66




TECElogo-Push male connector Eurocone, standard brass

Dimension	Item No.	Z1	L1	G	SW
16 x 3/4"	8610108	30	57	3/4"	27
20 x 3/4"	8610109	30	62	3/4"	27

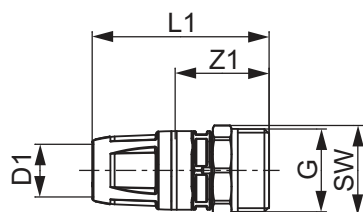


TECElogo-Push adapter screw connection with metallic sealing elements

Dimension	Item No.	Z1	L1	SW1	SW2
16 x 15 mm Cu	8711206	18	66	24	22
20 x 22 mm Cu	8711207	17	65	32	32

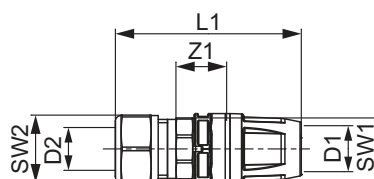


TECElogo-Push manifold, shut-off, standard brass

Dimension	Item No.	Z1	Z2	L1	L2	L3	L4	SW
3/4" x 16 Two-way	8730008	38	73	67	40	29	98	32
3/4" x 16 Three-way	8730009	38	113	67	40	29	138	32

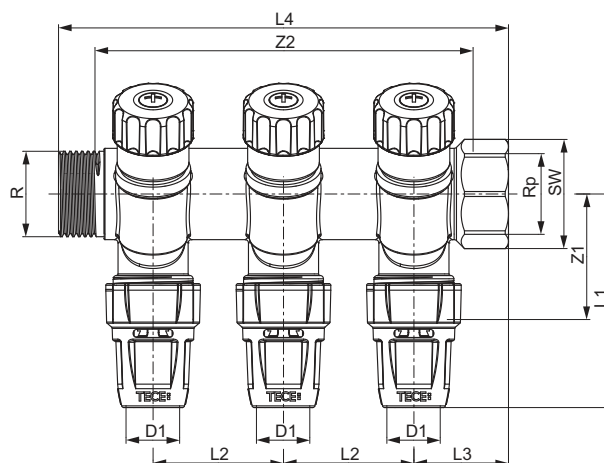



TECE universal manifold, with shut-off, standard brass

Dimension	Item No.	Z1	Z2	L1	L2	L3	L4	SW
3/4" x 3/4" EC Two-way	8730006	28	73	35	40	29	98	32
3/4" x 3/4" EC Three-way	8730007	28	113	35	40	29	138	32
1" x 3/4" EC Two-way	8730010	28	71	35	40	28	96	38
1" x 3/4" EC Three-way	8730011	28	111	35	40	28	136	38
1" x 3/4" EC four-way	8730040	28	151	35	40	28	176	38

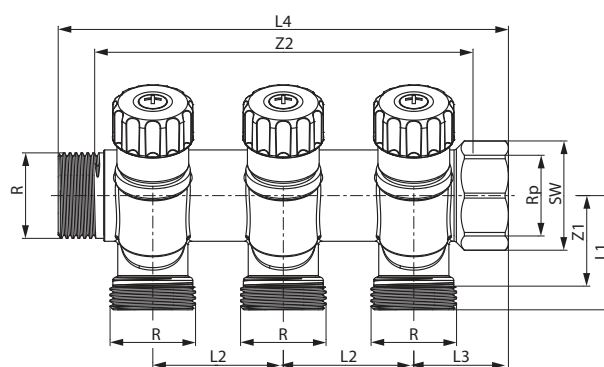

TECElogo-Push manifold, standard brass



Dimension	Item No.	Z1	Z2	L1	L2	L3	L4	SW
R 3/4" x Rp 3/4" x 16 Two-way	8630002	31	75	57	45	28	104	32
R 3/4" x R 3/4" x 16 Three-way	8630003	31	120	57	45	28	149	32

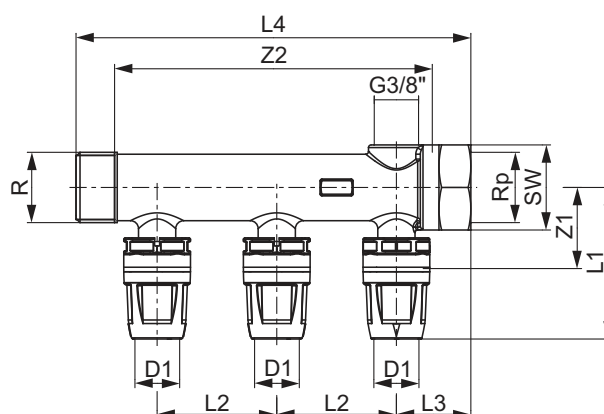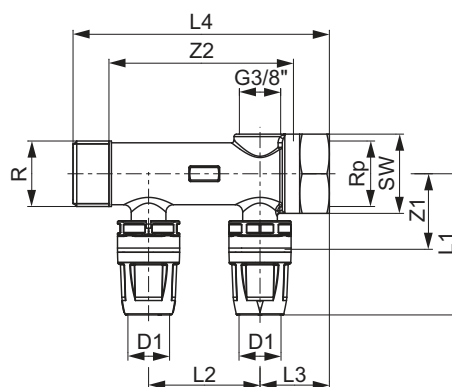

TECElogo – Dimensional drawings


TECElogo-Push universal manifold, red brass/silicon bronze

Dimension	Item No.	Z1	Z2	L1	L2	L3	L4	SW
R 3/4" x Rp 3/4" x 20 Two-way	8733002	19	85	50	50	28	114	32
R 3/4" x Rp 3/4" x 20 Three-way	8733003	19	135	50	50	28	164	32

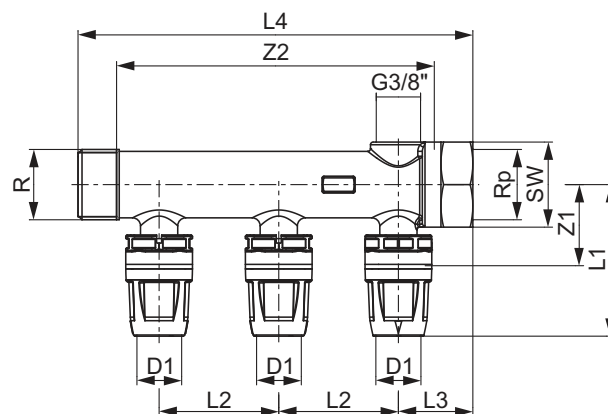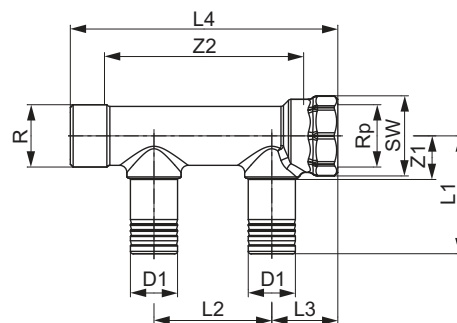


TECElogo flush-mounted ball valve with handwheel

Dimension	Item No.	Z1	L1	L2
16	8780016	53	80	75
20	8780020	52	84	75

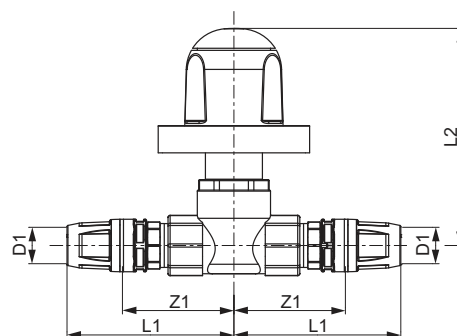

TECElogo flush-mounted ball valve with dummy cap

Dimension	Item No.	Z1	L1	L2
16	8780116	53	80	75
20	8780120	52	84	75

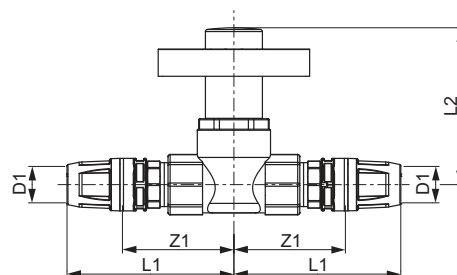

Pipe Systems

TECEfloor FLOOR HEATING SYSTEMS

TECEfloor



	Page
Pipes	132
Adapters	135
Mounting systems	137
Manifolds	148
Control	159
Accessories	170
Spare parts	172

Delivery unit 1 (DU 1) cannot be changed for technical reasons.

TECEfloor Soft-PERT 5S underfloor heating pipe

Highly flexible, five-layer underfloor heating pipe in accordance with EN ISO 21003 made of polyethylene with increased temperature resistance. Oxygen-tight with EVOH coating to DIN 4726; application area T_{max} 70 °C, 6 bar. Suitable for particularly rough installation conditions thanks to the 5-layer technology; SLQ quality-monitored and compatibility tested.

Classification in accordance with EN ISO 21003:

Application class 4: 6 bar, T_{max} 70 °C



Dimension	Item No.		DU 1	DU 2	DU 3
12 x 1,5 mm	77111222*	NEW	200 m	2000 m	4000 m
16 x 2,0 mm	77111614	NEW	120 m	1200 m	-
16 x 2,0 mm	77111632		300 m	1200 m	2400 m
16 x 2,0 mm	77111662		600 m	1200 m	2400 m
17 x 2,0 mm	77111732	NEW	300 m	1200 m	2400 m
17 x 2,0 mm	77111758	NEW	560 m	1120 m	2240 m
20 x 2,25 mm	77112032	NEW	300 m	900 m	1800 m
20 x 2,25 mm	77112062	NEW	600 m	2400 m	-
25 x 2,5 mm	77112542**	NEW	400 m	2000 m	-

TECEfloor SLQ PE-RT 5S underfloor heating pipe

Five-layer underfloor heating pipe heating pipe to EN ISO 21003 made of high-density polyethylene with higher temperature resistance (PE-RT type 2). Oxygen-tight with EVOH coating to DIN 4726; application area T_{max} 90 °C, 6 bar. Suitable for particularly rough installation conditions thanks to the 5-layer technology; SLQ quality-monitored and compatibility tested. DIN CERTCO 3V423 MVR (P)

Classification in accordance with EN ISO 22391-2:

Application class 4 and 5: 6 bar, T_{max} 90 °C



Dimension	Item No.		DU 1	DU 2	DU 3
12 x 1,5 mm	77111220	SALE	200 m	2000 m	4000 m
16 x 2 mm	77111612	SALE	120 m	1200 m	2400 m
16 x 2 mm	77111630	SALE	300 m	1200 m	2400 m
16 x 2 mm	77111660	SALE	600 m	1200 m	2400 m
17 x 2 mm	77111730	SALE	300 m	1200 m	2400 m
17 x 2 mm	77111756	SALE	560 m	1120 m	2240 m
20 x 2,25 mm	77112030	SALE	300 m	900 m	1800 m
20 x 2,25 mm	77112060	SALE	600 m	2400 m	-
25 x 2,5 mm	77112540	SALE	400 m	2000 m	-

TECEfloor SLQ PE- RT 5S BMB underfloor heating pipe**NEW**

Five-layer underfloor heating pipe in accordance with EN ISO 21003 made of high-density polyethylene with higher temperature resistance (PE-RT type 2). Oxygen-tight with co-extruded EVOH coating to DIN 4726; application area T_{max} 90 °C, 6 bar. Suitable for particularly harsh installation conditions thanks to the 5-layer technology; SLQ quality-monitored and compatibility tested. DIN CERTCO 3V423 MVR (P)

Classification according to EN ISO 22391-2:

Application class 4 and 5: 6 bar, T_{max} 90 °C

BMB at TECE stands for products based on the biomass balance approach. Here, biogenic raw materials (waste and residual materials from biomass) are used together with fossil raw materials in the manufacture of basic chemical products in the production network. The bio content is then mathematically allocated to the TECEfloor SLQ PE-RT 5S BMB panel heating pipes on the basis of the ISCC Plus certification system.

BMB products have the same quality as non-BMB products, as the formulation of the product is identical to that of the fossil equivalent. TECE's biomass balance approach supports the use of biogenic raw materials, which leads to savings in fossil raw materials and a reduction in greenhouse gas emissions.



Dimension	Item No.		DU 1	DU 2	DU 3
16 x 2,0 mm	77111635*	NEW	300 m	1200 m	2400 m
16 x 2,0 mm	77111665*	NEW	600 m	1200 m	2400 m

TECEfloor SLQ PE-RT/Al/PE-RT underfloor heating pipe

Aluminium-plastic composite pipe for underfloor heating, manufactured in accordance with DIN 16836. Specially developed for radiant heating systems with soft aluminium casing. Particularly flexible to lay as a consequence, but nevertheless sufficiently dimensionally stable. Ideal for dry-wall construction, dimpled sheets, lattice mats, clip rails and wall heating. 100 % impervious to oxygen diffusion thanks to butt-welded aluminium casing.

DIN CERTCO 3V377 MVR (M)

Classification in accordance with EN ISO 21003:

Application class 4: 6 bar, T_{max} 70 °C



Dimension	Item No.	DU 1	DU 2	DU 3
16 x 2 mm	77151612	120 m	1200 m	2400 m
16 x 2 mm	77151630	300 m	1500 m	3000 m
16 x 2 mm	77151660	600 m	1200 m	2400 m

TECEfloor SLQ PE-Xa 5S underfloor heating pipe

Five-layer underfloor heating pipe to DIN 16892/16893 made of cross-linked, high-density polyethylene PE-Xa.

SLQ quality-monitored and tested for compatibility, oxygen tight to DIN 4726. DIN CERTCO 3V449 PE-Xa

Classification in accordance with EN ISO 15875-2:

Application class 4 and 5: 6 bar, T_{max} 90 °C



Dimension	Item No.	DU 1	DU 2	DU 3
16 x 2 mm	77171630	300 m	1200 m	2400 m
16 x 2 mm	77171660	600 m	1200 m	2400 m
17 x 2 mm	77171730	300 m	1200 m	2400 m
17 x 2 mm	77171760	600 m	1200 m	2400 m
20 x 2 mm	77172060	600 m	2400 m	-

TECEfloor – Pipes

TECEfloor SLQ PE-Xc underfloor heating pipe

Underfloor heating pipe to DIN 16892/16893 made of electron beam cross-linked, high-density polyethylene. The special physical cross-linking of the molecular chains reliably prevents further crack growth at notches and grooves. SLQ quality-monitored and compatibility tested, oxygen-tight in accordance with DIN 4726.

DIN CERTCO 3V355 PE-Xc

Classification in accordance with EN ISO 15875-2:

Application class 4 and 5: 6 bar, T_{max} 90 °C



Dimension	Item No.	DU 1	DU 2	DU 3
16 x 2 mm	77131612	120 m	1200 m	2400 m
16 x 2 mm	77131630	300 m	1500 m	3000 m
16 x 2 mm	77131660	600 m	1200 m	2400 m
17 x 2 mm	77131712	120 m	840 m	1680 m
17 x 2 mm	77131730	300 m	1200 m	2400 m
17 x 2 mm	77131756	560 m	1120 m	2240 m
20 x 2 mm	77132030	300 m	900 m	1800 m
20 x 2 mm	77132061	600 m	2400 m	-

TECEfloor SLQ Eurocone clamping ring connection

Clamping ring connection with defined limit stop to prevent overtightening, with plastic clamping ring to protect the pipe surface from scratches and score marks, Eurocone compatible with SLQ heating circuit manifold, O-ring and clamping ring keyed to SLQ radiant heating pipes, with nickel-plated union nut Rp 3/4" and Eurocone, marked with system ID and dimensions.

SLQ quality-monitored, tested for compatibility and component of the DIN CERTCO certified TECEfloor pipe systems:

3V423 MVR (P)/3V355 PE-Xc/3V377 MVR (M)

Suitable for all TECEfloor underfloor heating pipes.



Suitable for:
PE-RT 5S, Soft-PERT 5 S
PE-RT/Al/PE-RT
PE-Xa 5S
PE-Xc

Dimension	Item No.	DU 1	DU 2
12 x 1,5	77211200	10 pc.	200 pc.
16 x 2	77211600	10 pc.	200 pc.
17 x 2	77211700	10 pc.	200 pc.
20 x 2,0/2,25	77212000	10 pc.	200 pc.

TECEfloor Eurocone Y-piece 3/4"

Eurocone 3/4" Y-piece to connect two equal heating circuits with a maximum flow rate of 2 l/min. to a heating circuit manifold outlet.



Item No.	DU 1	DU 2
77220035	1 pc.	50 pc.

TECEfloor SLQ Eurocone universal coupling

Eurocone universal coupling, double connector, nickel-plated, compatible with all TECEfloor Eurocone clamping ring connections.

SLQ quality-monitored and tested for compatibility.



Dimension	Item No.	DU 1	DU 2
3/4" EC x 3/4" EC	77220034	10 pc.	100 pc.

TECE pipe connector 1/2" x 3/4" MT

Nickel-plated pipe connector 1/2" x 3/4" Eurocone to connect radiators.



Dimension	Item No.	DU 1	DU 2
1/2" x 3/4" EC	8740440	10 pc.	100 pc.

TECEfloor – Adapters

TECEfloor SLQ coupling with pressure sleeves for all-plastic pipes

Pressure sleeve coupling for all TECEfloor all-plastic pipes, for permanent and O-ring-free connection, not suitable for Al composite pipes (Al/PE-RT), low pressure loss thanks to expansion technology.

SLQ quality-controlled, compatibility tested and part of the DIN CERTCO-certified TECEfloor pipe systems.



Suitable for:
PE-RT 5S, Soft-PERT 5S
PE-Xa 5S
PE-Xc

Dimension	Expanding heads	Pressing forks	Item No.	DU 1	DU 2	DU 3
12 x 12	14	16	77220012* NEW	1 pc.	10 pc.	100 pc.
16 x 16	16	16	77220016	1 pc.	10 pc.	100 pc.
17 x 17	17	16	77220017	1 pc.	10 pc.	100 pc.
20 x 20	20 L	20	77220020	1 pc.	10 pc.	100 pc.
25 x 25	25 L	25	77220025	1 pc.	10 pc.	100 pc.

For dim. 12 and 16 use TECEflex expansion head, for dim. 17, 20 and 25 use SLQ expansion head (77921700, 77922000 and 77922500)!

TECEfloor pressure sleeve coupling for SLQ Al/PE-RT radiant heating pipe

PPSU pressure sleeve coupling specially designed for SLQ Al/PE-RT underfloor heating pipes, for permanent and O-ring-free connection, low pressure loss thanks to expansion technology.

SLQ quality-monitored and tested for compatibility.

Use the TECEflex push sleeve tool dimension 16 to process the set consisting of a PPSU coupling and specially adapted pressure sleeve.



Suitable for:
PE-RT/Al/PE-RT

Dimension	Item No.	DU 1	DU 2	DU 3
16 x 16	77220015	1 pc.	10 pc.	100 pc.

TECEfloor Eurocone push-fitting type TECEllogo-Push

Eurocone push-fitting for fast, easy and twist-free connection of TECEfloor system pipes dimension 16, type SLQ PE-RT 5S, SLQ PE-Xa 5S and SLQ Al/PE-RT, to a heating circuit manifold with 3/4" Eurocone connection. Push-fitting based on innovative TECEllogo-Push technology. Simplifies assembly and reliably prevents torsion stress in the connection area. Secure and resistant to temperature changes, can subsequently be disconnected using the TECEfloor/TECEllogo system tool.

DVGW-certified and SLQ quality-monitored, compatibility tested and component of the DIN CERTCO certified TECEfloor pipe systems 3V423 MVR (P) and 3V377 MVR (M) and 3V449 PE-Xa.



Suitable for:
PE-RT 5S, Soft-PERT 5S
PE-RT/Al/PE-RT
PE-Xa 5S

Only use with the corresponding system pipes and system tool!

Dimension	Item No.	DU 1	DU 2
16 x 3/4"	77230016	2 pc.	100 pc.

TECEfloor roll insulation with impact sound insulation 30-2 DES WLG 040

Insulation made of EPS DES sg BS50-SD20-CP2, WLG 040, $R_{\lambda} = 0.75 \text{ m}^2\text{K/W}$, coated with a tear-resistant strip woven film, moveable load max. 5 kN/m^2 , impact sound improvement 29 dB (to DIN 4109-34: 2016-07 with 60 mm total screed thickness or 45 mm pipe overlap), HBCD-free.

Dimension	Item No.	DU 1	DU 2
Width 1 m / length 10 m	77531500	10 m ²	60 m ²

**TECEfloor roll insulation with impact sound insulation 30-3 DES WLG 045**

Insulation made of EPS DES sm BS50-SD15-CP3, WLG 045, $R_{\lambda} = 0.67 \text{ m}^2\text{K/W}$, class E/B2, coated with a tear-resistant strip woven film, moveable load max. 4 kN/m^2 , impact sound improvement 31 dB (to DIN 4109-34: 2016-07 with 60 mm total screed thickness or 45 mm pipe overlap), HBCD-free.

Dimension	Item No.	DU 1	DU 2
Width 1 m / length 10 m	77531520	10 m ²	60 m ²

**TECEfloor tacker panel Flat2**

2 mm thick PP hollow chamber sheet for universal laying on insulation on-site such as suitable mineral wool, EPS or PUR insulation. Suitable for the secure fixture of TECEfloor underfloor heating pipes using TECEfloor tacking pins T8, T6 or 10plus.

Rolls L x W: 30 m x 1.0 m (30 m²)

Item No.	DU 1	DU 2
77531541	30 m ²	180 m ²

**TECEfloor adhesive tape**

Adhesive tape to create a waterproof screed form by sticking on the stapled insulation joints.

Dimension	Item No.	DU 1	DU 2
Width 50 mm / length 66 m	77600010	1 pc.	36 pc.

**TECEfloor tape unwinder**

Tape unwinder for efficient use of adhesive tape.

Item No.	DU 1
77600020	1 pc.



TECEfloor – Mounting systems

TECEfloor tacking tool T8 extra

Tacking tool specially designed for extra-wide tacking pins T8 extra (8 mm). The precision-made tools are distinguished by their excellent reliability. Incl. stand, weight and inspection opening.

Not suitable for conventional 6 mm tacking pins.



Tacking pins	Item No.	DU 1
8 x 40 mm	77610001	1 pc.

TECEfloor tacking pins T8 extra, dim. 14-20

Extra-wide tacking pins with 8 mm wide clip for better fixing and guiding of heating pipes, particularly in floor areas. Tacking pin with special anchor, very good foil penetration, low damage to strip woven film and improved hold with 45° angle of pull (curves).

Optimised for EPS insulation, not suitable for PUR insulation.

Cannot be used with standard tacking tools!



Tacking pins	Item No.	DU 1	DU 2	DU 3
8 x 40 mm	77610010	200 pc.	4000 pc.	80000 pc.

TECEfloor standard tacking tool 6 mm

Standard tacking tool for conventional 6 mm tacking pins of length 40 mm or 55 mm. These precision-made tools are distinguished by their excellent reliability. Incl. stand, weight and inspection opening.



Tacking pins	Item No.	DU 1
6 x 40/55 mm	77610024	1 pc.

TECEfloor tacking pins standard 6 mm, dim. 14-20

Standard tacking pins, heat-applied, can be used with many conventional tacking tools.



40 mm length

Tacking pins	Item No.	DU 1	DU 2	DU 3
6 x 40 mm	77610016	300 pc.	6000 pc.	144000 pc.
6 x 55 mm	77610023	300 pc.	78000 pc.	-



55 mm length

TECEfloor tacker plate 10plus, EPS DEO WLG 035

Thermal insulation board made of expanded polystyrene rigid foam EPS DEO dh BS200-CS(10)150 according to EN 13163, laminated with a tear-resistant ribbon fabric foil, with 5 cm grid imprint, as screed moisture protection according to DIN 18560 and for secure fixing of the heating pipes using TECEfloor tacker pins 10plus. Panel thickness: 10 mm, thermal conductivity: 0.034 W/mK (WLS 040), thermal resistance: 0.29 m²K/W, compression strength at 10% compression 150 kPa, fire behaviour: E (B2), panel dimension: 2.0 x 1.0 m (2 m²)



Item No.	DU 1	DU 2	DU 3
77531533	26 m ²	52 m ²	208 m ²

TECEfloor tacking tool 10plus

Tacking tool 10plus, suitable only for use with type 10plus tacking pins. These precision-made tools are distinguished by their excellent reliability.

Tacking pins	Item No.	DU 1
10plus	77610026	1 pc.

**TECEfloor tacking pins 10plus**

Tacking pins 10plus, for fixing pipes on the TECEfloor folding tacking sheets 10plus. With 4 short holding anchors per pin and a wide supporting surface to achieve very high holding forces and pipe fixing in accordance with standards, also suitable for conventional tacking sheets.

Only for use with the TECEfloor tacking tool type 10plus.



Dimension	Item No.	DU 1	DU 2
10-12 mm	77610027	450 pc.	9000 pc.
14-17 mm	77610025	450 pc.	9000 pc.

TECEfloor – Mounting systems

TECEfloor dimpled panel 30-2/14-17 mm

Dimpled panel 30-2 for pipe dimensions 14 to 17 mm, spacing VA 6 cm, diagonal 84 mm, EPS DEO sg BS100-SD20-CP2 WLG 040 $R_{\lambda} = 0.75 \text{ m}^2\text{K/W}$, movable load max. 5 kN/m^2 , impact sound improvement 29 dB (to DIN 4109-34: 2016-07 with 60 mm total screed thickness or 45 mm pipe overlap), HBCD-free.



Dimension	Item No.	DU 1	DU 2
840 mm x 1440 mm	77510010	9.6 m ²	57.6 m ²

TECEfloor dimpled panel 11/14-17 mm

Dimpled panel with 11 mm insulation, laying distance VA 6 cm, diagonally 84 mm, EPS DEO ds BS250-CS(10)200, WLG 035 $R_{\lambda} = 0.31 \text{ m}^2\text{K/W}$, continuous compressive stress at 2% compression max. 60 kPa (60 kN/m^2), for pipe dimensions 14-17 mm, HBCD-free.



Dimension	Item No.	DU 1	DU 2
840 mm x 1440 mm	77510020	9.6 m ²	115.2 m ²

TECEfloor compensating element NP 30/11 for dimpled panels 30-2 and 11


Compensating element NP 30/11 for TECEfloor dimpled panels 30-2 and 11, 900 mm wide, to compensate for door openings or movement joints.



Dimension	Item No.	DU 1
Width 900 mm	77510021	10 pc.

TECEfloor dimpled sheet without insulation /14-17 mm

Dimpled sheet without insulation, to be laid on customer's insulation. For pipe dimensions 14-17 mm, spacing VA 6 cm, diagonal 84 mm.



Dimension	Item No.	DU 1	DU 2
840 mm x 1440 mm	77510030	16.8 m ²	201.6 m ²

TECEfloor compensating strips for dimpled sheets

Compensating element for TECEfloor dimpled sheets, 900 mm wide, to compensate for door openings or movement joints. Not suitable for dimpled panels 30-2 and 11.



Dimension	Item No.	DU 1
Width 900 mm	77510031	10 pc.

TECEfloor universal panel UP 16/12

Universal panel for use in old and new buildings in dry-wall or brick-wall construction systems. Extra-flat EPS element (16 mm) for floor, wall or ceiling with aluminium heat conduction plates glued over whole surface, with predetermined breaking points for adjustment of width and length without tools. For taking TECEfloor underfloor heating pipe PE-RT 5S 12 x 1.5 mm, HBCD-free.

Base plate made of EPS 035 DEO, >240 kPa

Thermal conductivity: 0.035 W/mK

Thermal resistance: 0.40 m²K/W

Heat conducting plates made of aluminium 0.25 mm, with Omega pipe layout

Compression strength: >240 kPa at 10 % compression in accordance with EN 826

Building material class B1

Dimensions (L x W x H): 1200 x 750 x 16 mm

Spacing: 150 mm



Item No.	DU 1	DU 2
77520001	9 m ²	117 m ²

TECEfloor combination element UP 16/12

Combination element consisting of three head elements with reversal elbows and compensation element for filling remaining areas, HBCD-free.

Base plate made of EPS 035 DEO, >240 kPa

Dimensions (L x W x H): 1200 x 750 x 16 mm



Item No.	DU 1	DU 2
77520002	4.5 m ²	117 m ²

TECEfloor edge board UP 16/12

Edge board made of wood fibre material for stronger and accurate edging, to be laid along the edge insulation strips. 5 mm wood fibre layer on underside to reduce structure-borne noise and compensate for minor surface unevenness. Mandatory for all installation variants with insulation mat and directly laid. Recommended for installations with dry screed.

Dimensions (L x W x H): 1000 x 45 x 16 mm



Item No.	DU 1	DU 2
77520003	10 pc.	630 pc.

TECEfloor – Mounting systems

TECEfloor decoupling mat

Load distribution and insulation mat, in conjunction with TECEfloor universal panel UP 16/12, for tiles and laminate. Polyester fibre board made of aluminium-clad polyester fleece and thermoplastic binder; consequently, high tear resistance and compression strength, movable loads up to 2 kN/m², point loads up to 2 kN.

Thermal conductivity: 0.2 W/mK

Weight: approx. 5.2 kg/m²

Tile formats

- min. size 10 x 10 cm or 100 cm²
- max. size 80 x 80 cm
- min. thickness (natural stone) 10 mm

Joint size

- min. 3 mm up to tile size 30 x 30 cm
- min. 4 mm up to tile size 40 x 40 cm
- min. 5 mm up to tile size 80 x 80 cm

Field size

- up to max. 60 m², length/width ratio max. 2:1

Dimensions (L x W x H): 1150 x 600 x 5 (+0.5) mm



Item No.	DU 1	DU 2
77520018	6.9 m ²	138 m ²

TECEfloor joint adhesive strip

Adhesive tape to glue insulation mat edges when laying tiles.

Dimension	Item No.	DU 1
120 m	77520019	120 m



TECEfloor Ultrabond Eco Fix UP

Dispersion fixing, for gluing the universal panels to the subsurface (only when laid directly) and for gluing the insulation mat to the universal panel, 10 kg container.

Dimension	Item No.	DU 1
10 kg	77520020	10 kg



TECEfloor dry-wall panel TP 30/16

Pipe base plate for installation of underfloor heating according to construction type B (laying pipe within the insulation layer under screed). Allows use with standard dry screed elements (Knauf, Fermacell, Rigips, etc.) as well as wet screed (cement screed, flow screed). Made of expanded polystyrene hard foam (EPS), with pipe layout channels for incorporating TECEfloor heat conduction profiles and TECEfloor underfloor heating pipes 16 x 2 mm. Can be laid in single as well double meander, HBCD-free.

Material: expanded polystyrene (EPS 035 DEO), building material class E
Thermal conductivity: 0.035 W/mK, R = 0,77 m²K/W
Compression strength 150 kPa at 10 % compression in accordance with EN 826

Spacing: VA 150, VA 300 (single and double meander)

Dimensions (L x W x H): 1150 x 750 x 30 mm

Note:

We recommend using dry-wall construction board TP 30/16 when using the TECEfloor aluminium composite pipe SLQ PE-RT/Al/PE-RT. Alternatively, you can also use the TECEfloor five-layer all-plastic pipes. Triple-layer all-plastic pipes are not recommended due to possible noise emission.



Item No.	DU 1	DU 2
77520006	8.625 m ²	60.375 m ²

TECEfloor dry-wall panel TP 30/16 BMB**NEW**

Pipe base panel for installation of underfloor heating according to construction type B (laying pipe within the insulation layer under screed). Allows use with standard dry screed elements (Knauf, Fermacell, Rigips, etc.) as well as wet screed (cement screed, flow screed). Made from expanded polystyrene hard foam (EPS), with pipe layout channels for incorporating TECEfloor heat conduction profiles and TECEfloor underfloor heating pipes 16 x 2 mm. Can be laid in single and double meander, HBCD-free.

Material: expanded polystyrene (EPS 035 DEO), building material class E
Thermal conductivity: 0.035 W/mK, R= 0.77 m²K/W
Compression strength 150 kPa at 10 % compression in accordance with EN 826

Spacing: VA 150, VA 300 (single and double meander)

Dimensions (L x W x H): 1150 x 750 x 30 mm

BMB at TECE stands for products based on the biomass balance approach. Here, biogenic raw materials (waste and residual materials from biomass) are used together with fossil raw materials in the manufacture of basic chemical products in the production network. The bio content is then mathematically allocated to the TECEfloor TP 30/16 BMB dry construction boards on the basis of the REDcert² certification system.

BMB products have the same quality as non-BMB products, as the formulation of the product is identical to that of the fossil equivalent. TECE's biomass balance approach supports the use of biogenic raw materials, which leads to savings in fossil raw materials and a reduction in greenhouse gas emissions.



Item No.		DU 1	DU 2
77520009*	NEW	8.625 m ²	60.375 m ²

TECEfloor – Mounting systems

TECEfloor heat-conducting profile TP 30/16

Heat conduction profile for mounting on the TECEfloor dry-wall panel TP 30/16. For uniform heat distribution by heating pipe over the dry screed plate. For taking TECEfloor underfloor heating pipes 16 x 2 mm. With predetermined breaking points for separation without tools.

Dimensions (L x W x H): 1000 x 132 x 0.4 mm/0.45 mm

Material requirements: approx. 6 pcs./m² (VA 15)



Version	Item No.	DU 1	DU 2
galvanised steel sheet, 0.4 mm	77520007	50 pc.	500 pc.
Aluminium, 0.45 mm	77520008	50 pc.	500 pc.

TECEfloor hot cutter UP

Hot cutter with U-shaped cutting blade (dim. 12 and 16) for cutting out inlet guides in EPS compensating elements, connection voltage 230 V.

Item No.	DU 1
77520021	1 pc.



TECEfloor cutting blade

U-shaped cutting blade for TECEfloor heat cutter, for cutting the inlet guides in the EPS combination element UP 16/12.



Dimension	Item No.	DU 1
12	77520026	1 pc.
16	77520027	1 pc.

TECEfloor board binders

Plastic-coated board binders to fix pipes on and join backerboards together. Length: 120 mm.

Item No.	DU 1
77611020	1000 pc.



TECEfloor tacking tool for pipe clips 17 mm

Tacking tool to quickly and precisely attach collated TECEfloor pipe clips 17 mm to a 3 mm TECEfloor backerboard.

Item No.	DU 1	DU 2
77611001	1 pc.	10 pc.



TECEfloor pipe clips 17 mm, magazined

Pipe clips for mounting underfloor heating pipes, dim. 17 on 3 mm backer-boards. Magazined for use in tacking tools.



Dimension	Item No.	DU 1
17 mm	77611000	1000 pc.

TECEfloor – Mounting systems

TECEfloor retaining pin

Retaining pins for fixing clip rails or mounting underfloor heating pipes.

Item No.	DU 1	DU 2
77612010	200 pc.	800 pc.



TECEfloor fixing hooks for nub sheet

Fixing hooks for fixing TECEfloor nub sheet on site-installed insulation including insertion aid with pre-insertion awl.

Item No.	DU 1	DU 2
77612020	100 pc.	2000 pc.



TECEfloor clip rail

Clip rail, modular expandable by means of push-fit connector system. Length of individual segments 100 cm, double-sided adhesive tape on underside.

Dimension	Item No.	DU 1	DU 2	DU 3
14-17 mm	77570010	10 m	100 m	2400 m
16-20 mm	77570015	10 m	100 m	1500 m

Delivery length per unit = 100 cm



TECEfloor clamping rail

Clamp rail for attaching and fixing TECEfloor underfloor heating pipes. Length: 2 m

Dimension	Item No.	DU 1	DU 2
12 mm	77570009	32 m	896 m
25 mm	77570025	32 m	800 m



TECEfloor edge insulation strip

Edge insulation strips made of PE foam, self-adhesive with foil for sound insulation and to compensate for thermal expansion of the screed layer in accordance with DIN 18560. Suitable for cement and flow screed.

Dimension	Item No.	DU 1	DU 2
150/10-40 m	77620012	160 m	960 m



TECE pipe bend guides

Pipe bend guides made of plastic, to guide pipes out of the screed.

Dimension	Item No.	DU 1	DU 2
14-17 mm	77910010	25 pc.	200 pc.
18-20 mm	77910011	25 pc.	100 pc.
25 mm	77910012	25 pc.	100 pc.



TECEfloor pipe joint protection

Polyethylene insulating tube to protect floor heating pipes in the expansion joint area.

Dimension	Item No.	DU 1	DU 2
17-20 mm	77630025	10 pc.	50 pc.

Delivery length per unit = 100 cm

**TECEfloor corrugated sheath pipe, slotted**

Slotted corrugated sheath pipe made of plastic for protection of the TECEfloor underfloor heating pipes in terms of breakthroughs and expansion joints.

Dimension	Item No.	DU 1	DU 2
25/20 mm	77911016	50 m	1300 m
28/23 mm	77911020	50 m	600 m

**TECEfloor expansion joint profile 10 x 100 mm**

Dimension	Item No.	DU 1
10 x 100 mm	77630010	18 m

Delivery length per unit = 180 cm

**TECEfloor polyethylene foil 0.2 mm**

Version	Item No.	DU 1
Roll length 50 m	77660012	75 m ²

Width: 1.5 m




TECEfloor – Manifolds

TECEfloor stainless steel heating circuit manifold with flow rate indicator

Stainless steel heating circuit manifold, heating circuit manifold bar with large chamber volume, surface polished, sound-absorbent plastic holder with fast assembly function, with union nut 1" flat sealing. Integrated return valves with double O-ring seal on valve tappet, valve disk with O-ring sealing for permanently reliable closing of the heating circuits, flow metre with shut-off, 0.2-5.0 l/min. with locking mechanism to EN 1264-4. Sight glasses can be exchanged under system pressure, batch indication and tracking for the unique identification of the manifold, even after many years of operation (supply of accessories and spare parts). SLQ quality-monitored and tested for compatibility. Every manifold is 100 % tested for tightness and function. Made in Germany

Version	a	b	Item No.	DU 1
2 heating circuits	198 mm	154 mm	77310002	1 pc.
3 heating circuits	248 mm	204 mm	77310003	1 pc.
4 heating circuits	298 mm	254 mm	77310004	1 pc.
5 heating circuits	348 mm	304 mm	77310005	1 pc.
6 heating circuits	398 mm	354 mm	77310006	1 pc.
7 heating circuits	448 mm	404 mm	77310007	1 pc.
8 heating circuits	498 mm	454 mm	77310008	1 pc.
9 heating circuits	548 mm	504 mm	77310009	1 pc.
10 heating circuits	598 mm	554 mm	77310010	1 pc.
11 heating circuits	648 mm	604 mm	77310011	1 pc.
12 heating circuits	698 mm	654 mm	77310012	1 pc.

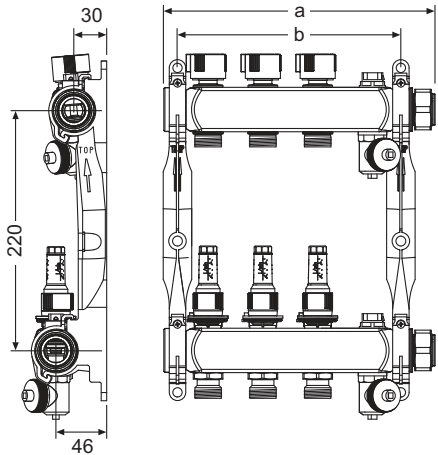

TECEfloor extension set for heating circuit manifold with flow rate indicator

Including 1" male connector to connect to a TECEfloor stainless steel heating circuit manifold.

Version	Length	Item No.	DU 1
2 heating circuits	153 mm	77310022	1 pc.
3 heating circuits	203 mm	77310023	1 pc.



TECEfloor quick-action air vent set for stainless steel heating circuit manifold

TECEfloor quick-action air vent set G 1/2" made of glass-fibre reinforced plastic, with O-ring seal. To automatically vent sealed heating systems to EN 12828. Patented two-way venting principle ensures high venting capacity. Suitable for water and a water-glycol solution with maximum 50 % glycol. Nominal pressure max. 8 bar at 95 °C.



Item No.	DU 1	DU 2
77300001	1 pc.	10 pc.

TECEfloor overflow valve for stainless steel heating circuit manifolds

Overflow valve for TECEfloor stainless steel heating circuit manifolds with flow indicator. For differential pressure equalisation between the flow and return manifold in order to keep the pump pressure/flow constant even when the HVAC valves are closed. Ready-to-install unit with 1" connection fitting, suitable for installation in the manifold cabinet, setting range 0.1-0.5 bar, installation dimension: 100 mm.




Dimension	Item No.	DU 1	DU 2
R 1"	77390012	1 pc.	10 pc.

TECEfloor comfort heating circuit manifold with flow indicator, type TECElogo-Push **NEW**

Plastic heating circuit manifold with preassembled Eurocone push-fittings of type TECElogo-Push, for fast and twist-free connection of TECEfloor heating pipes, dimension 16, type SLQ PE-RT 5S, SLQ Soft-PERT 5S, SLQ Al/PE-RT and SLQ PE-Xa 5S. Eurocone push-fittings can be easily removed at any time. Heating circuit manifold bar made of glass fibre reinforced polyamide, sound-proofing plastic holder with fast assembly function, integrated return valves with double O-ring seal on valve tappet, valve disk with O-ring seal for permanently reliable closing of the heating circuits, lockable flow metre 0-3.5 l/min with locking mechanism in accordance with EN 1264-4. Inspection glasses can be exchanged under system pressure. Batch indication and tracking for the unique identification of the manifold, even after many years of operation (supply of accessories and spare parts). Flow and return with filling and emptying unit (optionally expandable with TECEfloor thermometer), air vent valve (optionally expandable with TECEfloor quick air vent) with 1" brass union nut, flat-sealing. Optionally expandable with TECEfloor overflow valve (e.g. to ensure the minimum water volume in conjunction with a heat pump). SLQ quality-monitored and compatibility tested. Every manifold is 100 % tested for tightness and function.

Made in Germany

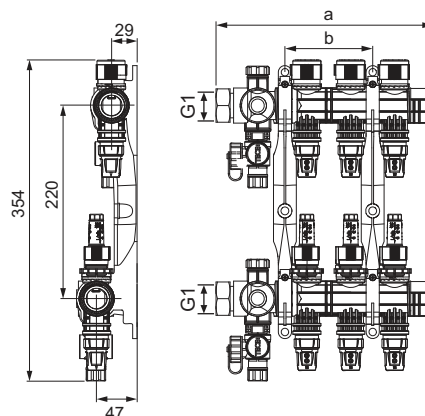

Version	a	b	Item No.		DU 1
2 heating circuits	202 mm	100 mm	77311302*	NEW	1 pc.
3 heating circuits	252 mm	150 mm	77311303*	NEW	1 pc.
4 heating circuits	302 mm	200 mm	77311304*	NEW	1 pc.
5 heating circuits	352 mm	250 mm	77311305*	NEW	1 pc.
6 heating circuits	402 mm	300 mm	77311306*	NEW	1 pc.
7 heating circuits	452 mm	350 mm	77311307*	NEW	1 pc.
8 heating circuits	502 mm	400 mm	77311308*	NEW	1 pc.
9 heating circuits	552 mm	450 mm	77311309*	NEW	1 pc.
10 heating circuits	602 mm	500 mm	77311310*	NEW	1 pc.
11 heating circuits	652 mm	550 mm	77311311*	NEW	1 pc.
12 heating circuits	702 mm	600 mm	77311312*	NEW	1 pc.

TECEfloor thermometer set for comfort heating circuit manifold **NEW**

Clip-on thermometer, 0-60 °C, for mounting on the comfort heating circuit manifold with flow meter.



Item No.		DU 1	DU 2
77311320*	NEW	1 pc.	336 pc.

TECEfloor – Manifolds

TECEfloor quick-action air vent set for comfort heating circuit manifold NEW

TECEfloor quick-action air vent set G 3/8" made of glass-fibre reinforced plastic, with O-ring seal. To automatically vent sealed heating systems to EN 12828. Patented two-way venting principle ensures high venting capacity. Suitable for water and a water-glycol solution with maximum 50 % glycol. Nominal pressure max. 8 bar at 95 °C.




Item No.		DU 1	DU 2
77311321*	NEW	1 pc.	10 pc.

TECEfloor stainless steel heating circuit manifold type TECElogo-Push with flow rate indicator

Stainless steel heating circuit manifold, outlets with preassembled Eurocone push-fittings of type TECElogo-Push for fast and twist-free connection of TECEfloor heating pipes, dimension 16, type SLQ PE-RT 5S, SLQ Al/PE-RT and SLQ PE-Xa 5S. Push-fitting with Eurocone connection can be subsequently removed with ease using the system tool. Heating circuit manifold bar with large chamber volume, surface polished, sound-absorbent plastic holder with fast assembly function, with union nut 1", flat sealing, integrated return valves with double O-ring seal on valve tappet, valve disk with O-ring sealing for permanently reliable closing of the heating circuits, flow metre with shut-off, 0.2-5.0 l/min with locking mechanism to EN 1264-4. Viewing glasses can be exchanged under system pressure, batch indication and tracking for the unique identification of the manifold, even after many years of operation (supply of accessories and spare parts). SLQ quality-monitored and compatibility tested. Every manifold is 100 % tested for tightness and function. Made in Germany

Only use with the corresponding system tool!

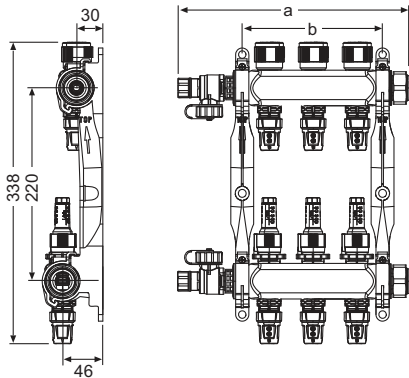

Version	a	b	Item No.		DU 1
2 heating circuits	215 mm	115 mm	77311102	SALE	1 pc.
3 heating circuits	265 mm	165 mm	77311103	SALE	1 pc.
4 heating circuits	315 mm	215 mm	77311104	SALE	1 pc.
5 heating circuits	365 mm	265 mm	77311105	SALE	1 pc.
6 heating circuits	415 mm	315 mm	77311106	SALE	1 pc.
7 heating circuits	464 mm	365 mm	77311107	SALE	1 pc.
8 heating circuits	515 mm	415 mm	77311108	SALE	1 pc.
9 heating circuits	565 mm	465 mm	77311109	SALE	1 pc.
10 heating circuits	615 mm	515 mm	77311110	SALE	1 pc.
11 heating circuits	665 mm	565 mm	77311111	SALE	1 pc.
12 heating circuits	715 mm	615 mm	77311112	SALE	1 pc.

TECEfloor plastic heating circuit manifold basic module

Basic module, modular expandable with 2-way, 3-way and 4-way connection modules, consists of base with union nut 1" flat-sealing, seal, flow and return thermometer, filling and emptying unit, end caps, manifold holders, screws and wall plugs. Operating conditions max. 60 °C at 6 bar or 90 °C at 3 bar. SLQ quality-monitored and tested for compatibility, 100 % tested for tightness and function.



Version	Item No.		DU 1
Basic module	77390010	SALE	1 pc.


TECEfloor plastic heating circuit manifold connection module with flow rate indicator

Connection module with flow rate indicator, modular expandable, heating circuit outlets in 3/4" Eurocone, flow with preconfigurable flow rate indicators up to 3.5 l/min, return with integrated valve cores M 30 x 1.5 mm. SLQ quality-monitored and tested for compatibility, 100 % tested for tightness and function.

Version	a	Item No.		DU 1
2 heating circuits	202 mm	77390020	SALE	1 pc.
3 heating circuits	252 mm	77390030	SALE	1 pc.
4 heating circuits	302 mm	77390040	SALE	1 pc.

Note:

Width (a) incl. basic module. The width increases by 50 mm with each additional heating circuit.

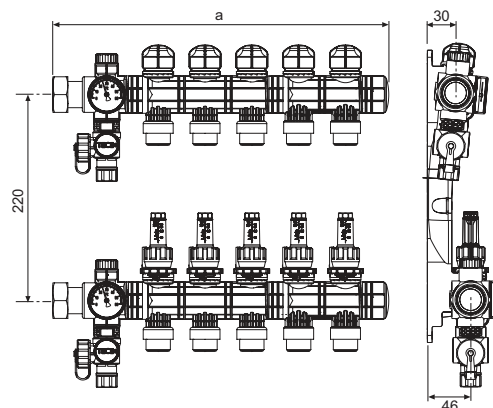

TECEfloor ball valve

Ball valve with 1" connection, nickel plated, incl. flat seal, installation dimension 70 mm.

Dimension	Item No.	DU 1	DU 2
G 3/4" x G 1"	77381001	1 pc.	20 pc.
G 1" x G 1"	77381003	1 pc.	16 pc.



TECEfloor angled ball valve set

Angled ball valve set consisting of return or flow ball valve with angled connection. Manifold connection G 1", flat sealing. Primary connection G 3/4" or G 1", incl. flat seal. Installation dimension 125 mm (3/4") or 145 mm (1").

Dimension	Item No.	DU 1	DU 2
G 3/4" x G 1"	77381002	1 pc.	20 pc.
G 1" x G 1"	77381009	1 pc.	20 pc.



TECEfloor ball valve with thermometer

Ball valve Rp 1" x R 1", including flat seal. Brass body, nickel-plated. Nominal pressure PN 25. Plastic turning handle and integrated thermometer. Display 0-120 °C. Accuracy class 2 according to EN 13190. Including clips in red and blue for identification of flow and return.

Dimension	Item No.	DU 1
Rp 1" x R 1"	77381008	1 pc.



TECEfloor – Manifolds

TECEfloor calorimeter installation kit

Calorimeter corner installation set with sensor mount to DIN 1434-2, versatile, overall length 110 mm or 130 mm, primary connection Rp 3/4", manifold connection R 1", flat sealing, flow and return ball valve with sensor connection M 10 x 1, installation dimension 127 mm, centre-to-centre distance 70 mm.

Dimension	Item No.	DU 1	DU 2
Rp 3/4" x R 1"	77382005	1 set	10 set



TECEfloor control valve 1"

Control valve G 1"/Rp 1" for shutting off the manifold flow and hydraulic comparison with pre-setting display incl. locking, Kvs value: 5.0 m³/h, installation dimension 70 mm.

Dimension	Item No.	DU 1	DU 2
Rp 1" x R 1"	77383001	1 pc.	10 pc.



TECEfloor zone regulator valve 1"

Zone regulator valve G 1"/Rp 1" for shutting off the manifold return flow as well as for taking the TECEfloor SLQ servomotor 230 V or 24 V, Kvs value: 4.6 m³/h, installation dimension 70 mm.

Dimension	Item No.	DU 1	DU 2
Rp 1" x R 1"	77383002	1 pc.	10 pc.



TECEfloor industrial heating circuit manifold, plastic, 1 1/2" basic module

Industrial plastic manifold 1 1/2", basic module for the modular installation of industrial manifolds up to 20 heating circuits, incl. boiler filling/emptying tap and wall mount.

Testing pressure 6 bar (< 30 °C, 24 h), operating pressure 3 bar, -20 °C to 60 °C.

Version	Item No.	DU 1
Basic module	77390110	1 pc.



TECEfloor industry heating circuit manifold pre-flow/return-flow set

Industry heating circuit manifold module, 2-20 heating circuits can be added modularly, O-ring sealing, pre-flow segment with flow rate metre 4-20 l/min., return segment with integrated valve. For connecting the TECEfloor PE-RT 5S pipes 25 x 2.5 mm using the TECEfloor connection adapter.

Version	Item No.	DU 1	DU 2
2 heating circuits	77390116	1 pc.	120 pc.
3 heating circuits	77390117	1 pc.	80 pc.



TECEfloor connection adapter set type TECEflex for industry heating circuit manifold

Plug adapter set with TECEfloor system transition type Flex for connection to the TECEfloor industrial heating circuit manifold.

Dimension	Version	Item No.	DU 1	DU 2
25 x 2,5	TECEflex	77390114	1 pc.	10 pc.

**TECEfloor industrial heating circuit manifold, plastic, wall mount set**

Industrial heating circuit manifold 1 1/2" wall mount set for additional mounting of the manifold module, 400 mm spacing or as of 10 to max. 20 heating circuits.

Item No.	DU 1
77390120	1 pc.

**TECEfloor industrial heating circuit manifold, plastic, pressure gauge**

Industrial heating circuit manifold pressure gauge with installation valve.

Item No.	DU 1
77390130	1 pc.

**TECEfloor industrial ball valve set 1 1/2"**

Industrial heating circuit manifold ball valve set G 1 1/2", made of brass, installation dimension 88 mm.

Item No.	DU 1
77381006	1 pc.



TECEfloor – Manifolds

TECEfloor fixed value control 20-55 °C

Fixed value control with thermostat head and flow sensor, hydraulic comparison with the adjacent heat distribution system via return valve and balance valve possible.

Electronically controlled circulating pump ES 15-60/130 (EEI≤0,20) with permanent magnet synchronous motor. Energy efficiency class A, (3 ... 42 W). The patented pump chamber prevents rotor blockages caused by deposits e.g. after long idle times.

Operating modes:

- Constant pressure 300 mbar
- Constant pressure 400 mbar
- Proportional and variably adjustable

Output approx. 10 kW,

Primary flow max. 90 °C, primary return max. 55 °C,

$P_{\max} = 6$ bar,

Thermostat valve K_{vs} value 4.0,

Return valve K_{vs} value 2.7,

Primary connection via Rp 3/4",

Secondary connection to the manifold R 1", flat sealing,

Installation dimension 245 mm.

Please order separately:

- TECEfloor contact thermostat 77450011 (optional)



Item No.

DU 1

77450000

1 pc.

TECEfloor ConstantMix control station

Preassembled control station thermostatic 3-way mixer 35-60 °C. With a scale of 1-6 for easy setting of the desired constant flow temperature for the under-floor heating. Electronically controlled circulating pump ES2 15-60 (EEI <0.20) with permanent magnet synchronous motor. Energy efficiency class A (3...42 W). Includes safety thermostat (fixed at 50 °C), for switching off the circulation pump when the secondary flow temperature gets too high.

Operating modes:

- Constant pressure 300 mbar
- Constant pressure 400 mbar
- Proportional and variably adjustable

Output approx. 10 kW,

Primary flow max. 90 °C, primary return max. 55 °C, $P_{\max} = 6$ bar,

3-way mixer K_{vs} value 2.5

Primary connection via Rp 3/4" ball valve,

Secondary connection to the manifold R 1", flat-sealing, installation dimension 245 mm.



Item No.

DU 1

77450010

1 pc.

TECEfloor ServoMix control station

Preassembled control station with manual 3-way mixer. Suitable for accommodating a mixer motor (e.g. for weather-driven flow temperature regulation). Electronically controlled circulating pump ES2 15-60 (EEI <0.20) with permanent magnet synchronous motor. Energy efficiency class A (3...42 W).

Operating modes:

- Constant pressure 300 mbar
- Constant pressure 400 mbar
- Proportional and variably adjustable

Output approx. 10 kW,

Primary flow max. 90 °C, primary return max. 55 °C, $P_{\max} = 6$ bar,

3-way mixing valve K_{vs} value 4.3

Primary connection via Rp 3/4" ball valve,

Secondary connection to the manifold R 1", flat-sealing, installation dimension 245 mm.



Item No.

DU 1

77450005

1 pc.

TECEfloor contact thermostat 20-60 °C STC

Safety thermal cut-out with tensioning band, electromechanical contact thermostat for switching off circulating pumps or closing zone valves NC, connected load 230 V.



Item No.

DU 1

77450011

1 pc.

TECEfloor – Manifolds

TECEfloor Comfort manifold cabinet UP 110

Stable Comfort flush-mounted manifold cabinet made of 1 mm thick, galvanised sheet steel, with raised electrical installation area in the upper part of the cabinet including top-hat rail to accommodate the TECEfloor control terminal strips. Rear panel with 2 removable fixing rails including non-slip fixing screws to accommodate the heating circuit manifold, top and side panels with pre-punched openings for supply and return pipes, including screed baffle plate, door and cover frame made of galvanised sheet steel, powder-coated in white (RAL 9016), depth adjustable 110-150 mm, installation height 780-900 mm.



Cabinet type	Width	Item No.	DU 1	DU 2
110-1	400 mm	77351501	1 pc.	26 pc.
110-2	540 mm	77351502	1 pc.	22 pc.
110-3	690 mm	77351503	1 pc.	15 pc.
110-4	840 mm	77351504	1 pc.	13 pc.
110-5	990 mm	77351505	1 pc.	12 pc.
110-6	1140 mm	77351506	1 pc.	11 pc.

Wall opening measurement = interior width + at least 45 mm

Recommended cabinet width = installed elements + and assembly clearance distance (2 x ≥ 50 mm)

Item No.	Required niche width	Required niche height	Required niche depth
77351501	430 mm	715 mm	115-155 mm
77351502	570 mm	715 mm	115-155 mm
77351503	720 mm	715 mm	115-155 mm
77351504	870 mm	715 mm	115-155 mm
77351505	1020 mm	715 mm	115-155 mm
77351506	1170 mm	715 mm	115-155 mm

Item No.	Heating circuits incl. ball valve	Heating circuits incl. corner ball valve	Heating circuits incl. corner calorimeter set
77351501	2	-	-
77351502	3-5	2-4	2-3
77351503	6-8	5-7	4-6
77351504	9-11	8-10	7-9
77351505	12	11-12	10-12
77351506	12+3	12+3	12+3

Item No.	Heating circuits incl. fixed setpoint regulation
77351501	-
77351502	2
77351503	3-5
77351504	6-8
77351505	9-11
77351506	12

TECEfloor Comfort manifold cabinet UP 80

Stable Comfort flush-mounted manifold cabinet made of 1 mm thick, galvanised sheet steel, with raised electrical installation area in the upper part of the cabinet including top-hat rail to accommodate the TECEfloor control terminal strips. Rear panel with 2 removable fixing rails including non-slip fixing screws to accommodate the heating circuit manifold, top and side panels with pre-punched openings for supply and return pipes, including screed baffle plate, door and cover frame made of galvanised sheet steel, powder-coated in white (RAL 9016), depth adjustable 80-120 mm, installation height 780-900 mm.



Cabinet type	Width	Item No.	DU 1	DU 2
80-2	540 mm	77351602	1 pc.	26 pc.
80-3	690 mm	77351603	1 pc.	19 pc.
80-4	840 mm	77351604	1 pc.	17 pc.
80-5	990 mm	77351605	1 pc.	14 pc.

Wall opening measurement = interior width + at least 45 mm

Recommended cabinet width = installed elements + and assembly clearance distance (2 x ≥ 50 mm)

Item No.	Required niche width	Required niche height	Required niche depth
77351602	570 mm	715 mm	85-125 mm
77351603	720 mm	715 mm	85-125 mm
77351604	870 mm	715 mm	85-125 mm
77351605	1020 mm	715 mm	85-125 mm

Item No.	Heating circuits incl. ball valve	Heating circuits incl. corner ball valve	Heating circuits incl. corner calorimeter set
77351602	2-5	2-4	2-3
77351603	6-8	5-7	4-6
77351604	9-11	8-10	7-9
77351605	12	11-12	10-12

Item No.	Heating circuits incl. fixed setpoint regulation
77351602	2
77351603	3-5
77351604	6-8
77351605	9-11

TECEfloor – Manifolds

TECEfloor Comfort manifold cabinet AP 140

Stable Comfort wall-mounted manifold cabinet made of 1 mm thick, galvanised sheet steel, powder-coated in white (RAL 9016), with raised electrical installation area in the upper part of the cabinet including top-hat to accommodate the TECEfloor control terminal strips, removable rear panel with 2 fastening rails including non-slip fixing screws to accommodate the heating circuit manifolds, depth: 140 mm, height: 710 mm.



Cabinet type	Width	Item No.	DU 1	DU 2
140-2	500 mm	77351802	1 pc.	27 pc.
140-3	730 mm	77351803	1 pc.	18 pc.
140-4	880 mm	77351804	1 pc.	16 pc.
140-5	1030 mm	77351805	1 pc.	13 pc.

Recommended cabinet width = installed elements + and assembly clearance distance (2 x ≥ 50 mm)

Item No.	Heating circuits incl. ball valve	Heating circuits incl. corner ball valve
77351802	2-4	2-3
77351803	5-9	4-8
77351804	10-11	9-11
77351805	12	12

Item No.	Heating circuits incl. corner calorimeter set	Heating circuits incl. fixed setpoint regulation
77351802	2	-
77351803	3-7	2-6
77351804	8-10	7-9
77351805	11-12	10-12

TECEfloor turning lock for Comfort manifold housings

Turning lock for TECEfloor comfort manifold housings flush-mounted and wall-mounted.

Item No.	DU 1	DU 2
77990097	1 pc.	10 pc.



TECEfloor 3-way heating pump assembly

Heating pump assembly for restricting and regulating the flow temperature in combined radiator-underfloor heating systems. Pre-assembled and compact control station for a mixed heating circuit with 3-way mix valve with steplessly adjustable bypass and electronically controlled circulation pump.

External connections: Rp 1"
Centre distance: 125 mm
Operation: maximum 6 bar
Operating temperature: maximum 95 °C
Version: Flow right (can be converted to flow left)

Consisting of:

- High-efficiency circulation pump Wilo Yonos Para (RS 25/6 and 25/7.5)
- 3-way mixing valve with integrated bypass kvs = 7.0
- Shut-off unit with integrated thermometers
- Lockable gravity brakes
- Heat insulation jacket made of EPP (Dimensions: 250 x 380 x 170 mm)



Version	Item No.	DU 1
Rp 1" - RS 25/6 (up to approx. 20 KW/10 K/1700 l/h)	77460003	1 pc.
Rp 1" - RS 25/7.5 (up to approx. 30 KW/10 K/2500 l/h)	77460004	1 pc.

TECEfloor mixing valve motor 230 V

3-point actuator for mix valve, valve position indicator, LED rotation indicator, simple and quick assembly, coupling for manual actuation, quiet and reliable.

Power: 230 V, 50 Hz/3-5 VA
Actuating angle: 90 ° fix
Runtime: 2 min/90 °
Torque: 5 Nm
Protection class: IP42



Item No.	DU 1
77460005	1 pc.

TECEfloor constant temperature regulator 230 V

Constant temperature regulator with built-in 3-point actuator for simple and fast assembly. Settings via capacitive keyboard, resistant to mechanical impacts, moisture and dust. With temperature display, valve position indicator, LED rotation indicator, including immersion sensors.

Power: 230 V, 50 Hz/4 VA
Torque: 6 Nm
Protection class: IP42



Item No.	DU 1	DU 2
77460006	1 pc.	24 pc.

TECEfloor – Control

TECEfloor design RTL box shell set

Control unit for decentralised individual room control incl. return temperature limit for floor and wall heating systems in combination with a radiator installation.

Consisting of:

Wall installation module with pre-configurable control valve, pre-configurable RTL valve and thermostat valve, including bare-wall protection system and connection adapter 3/4" Eurocone, installation depth: 65-90 mm.

Caution:

Can only be used in combination with the TECEfloor design RTL box fine installation set 77470020 or 77470021 (please order separately).



Item No.	DU 1
77470010	1 pc.

TECEfloor Design RTL box fine installation set

Control unit for decentralised individual room control incl. return temperature limit for floor and wall heating systems in combination with a radiator installation.

Consisting of:

High-quality design cover plate made of real glass, attractive design thermostat head made of anodised aluminium, plastic installation frame as well as mounting plate for depth adjustment.

Cover plate dimensions (W x H x D): 104 x 124 x 7 mm

Caution:

Can only be used in combination with the TECEfloor design RTL box shell set 77470010 (please order separately).



Colour	Item No.	DU 1
White glass	77470021	1 pc.
Black glass	77470020	1 pc.

TECEfloor Standard RTL box

Control unit for decentralised individual room temperature control including return temperature limitation for floor and wall heating systems in combination with a radiator installation.

Consisting of:

- Shell set with wall installation box with presettable control valve, presettable RTL and thermostatic valve, including bare-wall protection and connection adapter 3/4" Eurocone, installation depth: 65-90 mm.
- Fine installation set with plastic cover plate in high-gloss white, shapely thermostat control head and installation frame



Item No.	DU 1
77470005	1 pc.

TECEfloor thermostat head extension for RTL Box

Thermostat head extension if the maximum installation depth of the TECEfloor RTL Box is exceeded. Length 20 mm.



Version	Item No.	DU 1	DU 2
Design RTL Box	77470025	1 pc.	-
Standard RTL box	77470026	1 pc.	10 pc.

TECEfloor room thermostat RT-A, analogue

Electronic room thermostat 230 V/24 V NC. For assembly on concealed sockets or directly on the wall, room temperature control via dial with soft-lock, set-back input, 2 K temperature reduction, switching current 1 A (24 V) or 2 A (230 V) resistive load, for max. 5 or 10 servomotors per 3 W, dimensions (W x H x D): 86 x 86 x 29 mm, plastic housing, colour: signal white.



Available in two versions:

- RT-A: Heating
 - RT-A radiator: Heating/cooling via changeover input
- 230 V and 24 V option.

Version	Item No.	DU 1
RT-A 230	77410030	1 pc.
RT-A 230-HK	77410031	1 pc.
RT-A 24	77410032	1 pc.
RT-A 24-HK	77410033	1 pc.

TECEfloor room thermostat RS-A, analogue

Electronic room sensor, 24 V NC. Installation on flush-mounted socket or directly onto the wall. Setting of the room temperature only via the setting wheel in the cover. Set-back input, 2 K temperature reduction, switching current 1 A (24 V) resistive load, for max. 5 servomotors per 3 W, dimensions (W x H x D): 86 x 86 x 29 mm, plastic housing, colour: signal white.



Version	Item No.	DU 1	DU 2
RS-A 24	77410051	1 pc.	54 pc.

TECEfloor – Control

TECEfloor room thermostat RT-D, LC display

Electronic room thermostat 230 V/24 V NC. For assembly on concealed sockets or directly on the wall, room temperature control via dial with turn and press mechanism, and soft-lock, LC display, selectable operating mode: Day/night/automatic, switching current 1 A (24 V/230 V) resistive load, for max. 5 servomotors of 3 W each, dimensions (W x H x D): 86 x 86 x 31 mm, plastic housing, colour: signal white.

Available in two versions

- RT-D Standard: Heating, set-back input, 2 K temperature set-back, automatic mode via external time switch
- RT-D Control: Heating/cooling, changeover input, internal timer, set-back output, smart start-stop function, connection for external sensor

Optionally in 230 V and 24 V.



Version	Item No.	DU 1
RT-D 230 Standard	77410034	1 pc.
RT-D 230 Control	77410035	1 pc.
RT-D 24 Standard	77410036	1 pc.
RT-D 24 Control	77410037	1 pc.

TECEfloor room thermostat RT-D, LC display design

Electronic room thermostat 230 V/24 V NC. For assembly on concealed sockets or directly on the wall, room temperature control via dial with turn and press mechanism, and soft-lock, LC display, selectable operating mode: Day/night/automatic, switching current 1 A (24 V/230 V) resistive load, for max. 5 servomotors of 3 W each, dimensions (W x H x D): 92 x 92 x 31 mm, plastic housing, colour: signal white.

With high-quality design real glass cover.

Available in two versions

- RT-D Design Standard: Heating, set-back input, 2 K temperature set-back, automatic mode via external time switch
- RT-D Design Control: Heating/cooling, changeover input, internal timer, set-back output, smart start-stop function, connection for external sensor

Optionally in 230 V or 24 V.



Version	Item No.	DU 1
RT-D Design 230 Standard	77410039	1 pc.
RT-D Design 230 Control	77410041	1 pc.
RT-D Design 24 Standard	77410043	1 pc.
RT-D Design 24 Control	77410045	1 pc.

TECEfloor decorative frame

Decorative frame for TECEfloor room thermostats. For covering flush-mounted sockets that are larger than the room thermostat or have not been cleanly plastered around. Suitable for all wired TECEfloor room thermostats (77410030-77410051). Dimensions: 94 x 94 mm, colour: signal white.



Item No.	DU 1	DU 2
77410052	13 pc.	260 pc.

TECEfloor connection unit Standard

Connection unit to wire TECEfloor room thermostats with TECEfloor servomotors (230 V/24 V). Includes set-back channel to connect an external system clock or to connect a TECEfloor room thermostat RT-D control, for temperature reduction by TECE room thermostats RT-A or RT-D Standard, screwless push-fit connections.

Dimensions (W x H x D): 326 x 90 x 52 mm

Equipment: Only heating

Please order separately:

- TECEfloor system transformer 77430040 (for 24 V)



Version	Item No.	DU 1
Standard 230/24 V - 6 zones	77430028	1 pc.
Standard 230/24 V - 10 zones	77430029	1 pc.

TECEfloor connection unit Standard plus

Connection unit to wire TECEfloor room thermostats with TECEfloor servomotors (230 V/24 V). Includes set-back channel to connect an external system clock or to connect a TECEfloor room thermostat RT-D control, for temperature reduction by TECE room thermostats RT-A or RT-D Standard, screwless push-fit connections.

Dimensions (W x H x D): 326 x 90 x 52 mm

Equipment: Heating and cooling, output pump control, input temperature limiter and dew point monitor

Please order separately:

- TECEfloor system transformer 77430040 (for 24 V)



Version	Item No.	DU 1
Standard plus 230 V - 6 zones	77430030	1 pc.
Standard plus 230 V - 10 zones	77430031	1 pc.
Standard plus 24 V - 6 zones	77430032	1 pc.
Standard plus 24 V - 10 zones	77430033	1 pc.

TECEfloor temperature sensor

Floor sensor for connection to the TECEfloor room thermostats RT-D control, sensor: NTC 22 kOhm at 25 °C.

Length/type: 3 m, 2 x 0.75 mm²



Item No.	DU 1
77410050	1 pc.

TECEfloor system transformer

Safety isolating transformer to EN 61558 for TECEfloor connection unit, 24 V. Primary: 230 V 50/60 Hz, secondary: 24 V, 30 VA, no load power < 1 W.

Item No.	DU 1	DU 2
77430040	1 pc.	12 pc.




TECEfloor – Control

TECEfloor room control unit SH-DT, temperature, LCD display

Electronic individual room controller for residential and business premises with bidirectional radio communication (868 MHz).

Features:

- Integrated temperature sensor
- LCD glass display with backlight
- Touch keypads for user-friendly operation
- Setpoint temperature adjustment from 5-37 °C
- Operating modes: Comfort, lower, OFF, frost protection, timer
- Window open detection
- Display lock via PIN code
- Protection class IP 30
- Range: max. 30 m (undisturbed)
- Colour: white or black
- Includes 2 x 1.5 V batteries (AAA)
- Input for external temperature sensor
- Wall mounting or tabletop installation with stand
- Compatible with TECEfloor control distributor (77420064/65)
- Smart Home-enabled in conjunction with the TECEfloor Smart Home central unit (77420060/61)
- Dimensions: 83 x 83 x 17 mm




Version	Item No.	DU 1	DU 2
SH-DT white	77420051	1 pc.	24 pc.
SH-DT black	77420052	1 pc.	24 pc.

TECEfloor room control unit SH-DTH, temperature and humidity, LCD display

Electronic individual room controller for residential and commercial premises with bidirectional radio communication (868 MHz).

Features:

- Integrated temperature and humidity sensor
- LCD glass display with backlight
- Touch keypads for user-friendly operation
- Setpoint temperature adjustment from 5-37 °C
- Operating modes: Comfort, lower, OFF, frost protection, timer
- Window open detection
- Display lock via PIN code
- Protection class IP 30
- Range: max. 30 m (undisturbed)
- Colour: white
- includes 2 x 1.5 V batteries (AAA)
- Input for external temperature sensor
- Wall mounting or tabletop installation with stand
- Compatible with TECEfloor control distributor (77420064/65)
- Smart Home capable in conjunction with the TECEfloor Smart Home central unit (77420060/61)
- Dimensions: 83 x 83 x 17 mm




Version	Item No.	DU 1	DU 2
SH-DTH white	77420053	1 pc.	24 pc.

TECEfloor room control unit SH-DTP, temperature, LCD display, programmable

Electronic individual room controller for residential and business premises with bidirectional radio communication (868 MHz).

Features:

- Integrated temperature sensor
- LCD glass display with backlight
- Touch keypads for user-friendly operation
- Programmable
- Setpoint temperature adjustment from 5-37 °C
- Operating modes: Auto, Comfort, lower, OFF, holiday, timer
- 9 integrated standard and 4 customisable weekly programs
- Window open detection
- Display lock via PIN code
- Protection class IP 30
- Range: max. 30 m (undisturbed)
- Colour: white
- Includes 2 x 1.5 V batteries (AAA)
- Input for external temperature sensor
- Wall mounting or tabletop installation with stand
- Compatible with TECEfloor control distributor (77420064/65)
- Smart Home-enabled in conjunction with the TECEfloor Smart Home central unit (77420060/61)
- Dimensions: 85 x 85 x 21 mm




Version	Item No.	DU 1	DU 2
SH-DTP white	77420055	1 pc.	24 pc.

TECEfloor room control unit SH-AT, temperature

Electronic individual room controller for residential and business premises with bidirectional radio communication (868 MHz).

Features:

- Integrated temperature sensor
- Setting of the setpoint temperature from 7-30 °C via adjusting wheel
- Switching differential 0.5 K, with status LED
- Protection class IP 30
- Range: max. 30 m (undisturbed)
- Colour: White
- Includes 2 x 1.5 V batteries (AAA)
- Wall mounting or table installation with stand
- Compatible with TECEfloor control distributor (77420064/65)
- Smart Home-enabled in conjunction with the TECEfloor Smart Home central unit (77420060/61)
- Dimensions: 85 x 85 x 20 mm



Version	Item No.	DU 1	DU 2
SH-AT white	77420050	1 pc.	24 pc.

TECEfloor – Control

TECEfloor control distributor SH-CD

Control terminal strip with bidirectional radio communication (868 MHz), for connecting the TECEfloor room operating units with the TECEfloor actuators (230 V).

Features:

- 6 or 10 zones (max. number of room operating units)
- 2 drives (230 V) per zone, several zones can be combined
- Multicoloured status LEDs
- Screwless cable plug connections
- Integrated radio antenna
- Protection class IP 30
- Power supply: 230 V
- Zone-by-zone humidity management (dew point monitoring)
- Heating and cooling function
- Dimensions: 265 x 90 x 56 mm (6 zones), 365 x 90 x 56 mm (10 zones)


Output:

- 1 x live output (230 V) for pump control
- 1 x floating output for switching a heat generator

Input:

- 1 x input change-over signal heating/cooling
- 1 x input temperature limiter for switching off the pump in case of overtemperature
- 1 x input temperature sensor for dew point monitoring in cooling mode

Version	Item No.	DU 1	DU 2
SH-CD6-230	77420064	1 pc.	6 pc.
SH-CD10-230	77420065	1 pc.	6 pc.

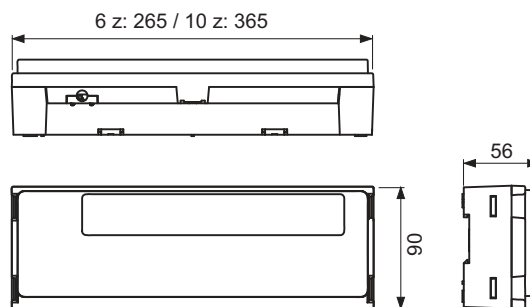

TECEfloor heating/cooling module SH-HCM

Switching module with bidirectional radio communication (868 MHz), as interface for central heating/cooling management.

Features:

- Heating or cooling request from reversible heat pump or external change-over switch or via TECEfloor central unit
- Power supply: 230 V
- Protection class: IP 30
- Heating and cooling functions in combination with TECEfloor control distributor (77420064/65)
- Dimensions: 265 x 90 x 56 mm


Output:

- 1 x floating output for switching a heat generator
- 1 x floating output for switching a cooling unit
- 1 x floating output for switching a dehumidifier
- 1 x live output (230 V) for pump control

Input:

- 1 x floating input for switching heating/cooling
- 1 x floating input for central dew point sensor

Version	Item No.	DU 1	DU 2
SH-HCM	77420066	1 pc.	6 pc.

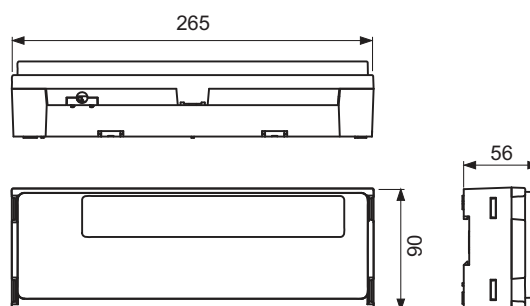


TECEfloor Smart Home central unit SH-CU

Central operating unit with bidirectional radio communication (868 MHz), for programming and controlling the TECEfloor individual room controller.

Features:

- High-quality real glass surface with capacitive colour touch screen
- Determination of individual time programmes for max. 50 room control units including heating/cooling applications.
- 25 ON/OFF switches by using TECEfloor switch module or TECEfloor radio sockets
- For installation on flush-mounted socket UP 68
- Voltage supply 85-265 V (50-60 Hz) via connection socket (included in scope of delivery)
- Removable operating unit with rechargeable battery for approx. 2 hours of offline operation
- Choice of table installation with power supply via optional TECEfloor USB power supply unit (77420075)
- Micro SD card slot
- Protection class IP 30
- Colour: white or black
- Includes WiFi interface (802.11b - 2.4 GHz and 802.11g - 2.4 GHz) for communication with on-site WLAN router
- Remote control via app for smartphone and tablet (Android or IOS) or Internet port
- Compatible voice assistants: Amazon Alexa and Google Assistant
- Dimensions: 158 x 116 x 22 mm



Version	Item No.	DU 1	DU 2
SH-CU white	77420060	1 pc.	17 pc.
SH-CU black	77420061	1 pc.	17 pc.

TECEfloor radiator thermostatic head SH-RC

Thermostatic head with integrated valve drive for radiator control, with bidirectional radio communication (868 MHz).

Features:


- Display of room temperature
- Adjustment of setpoint temperature from 5-30 °C
- Operating modes: Auto, Comfort, lower, OFF, holiday, frost protection
- 9 integrated standard and 4 customisable weekly programs
- Window open detection
- Protection class IP 30
- Colour: white
- Includes 2 x 1.5 V batteries (AAA)
- Stand-alone operation or in combination with TECEfloor central unit
- Includes various valve adapters (Danfoss, Heimeier, Honeywell ...)



Item No.	DU 1	DU 2
77420072	1 pc.	17 pc.

TECEfloor socket SH-PO

Socket with bidirectional radio communication (868 MHz), for ON/OFF control of electrical devices (230 V with safety plug) via the TECEfloor central unit. Can also be used in combination with a room control unit for controlling electric radiators, heating panels or infrared heaters with Schuko plug. Switching capacity: Relay 5 A, 250 V, max. 1100 W protection class IP20.



Item No.	DU 1	DU 2
77420070	1 pc.	40 pc.

TECEfloor – Control

TECEfloor switch module SH-SM

Switching module with bidirectional radio communication (868 MHz), for controlling heat/cold generators, fans, air conditioners, pumps, valve drives and much more. With potential-free switching contact, 10 A, 250 V. Protection class IP 20. Using a cable bridge, the unit is also suitable for direct connection to control electric radiators, heating panels, infrared heaters, etc. Can also be used as an ON/OFF switching contact in combination with a TECEfloor central unit.



Item No.	DU 1	DU 2
77420071	1 pc.	40 pc.

TECEfloor temperature sensor SH-FS

NTC temperature sensor with cable length 3 m, can be used as floor or remote sensor in connection with the TECEfloor room control units, sensor of class II, R25: 10 K.



Item No.	DU 1	DU 2
77420074	1 pc.	150 pc.

TECEfloor USB power supply SH-PS for central unit

Power supply unit with mini USB cable for power supply of the TECEfloor central unit when installed on a table, input voltage: 100-240 V/0.15 A, output voltage: 5 V/0.5 A.



Item No.	DU 1	DU 2
77420075	1 pc.	112 pc.

TECEfloor repeater SH-R

Repeater for radio signal optimisation in case of poor radio reception, USB power supply unit 100-240 V, radio antenna with USB plug.

Item No.	DU 1	DU 2
77420073	1 pc.	34 pc.



TECEfloor SLQ servomotor TA 2.0

Thermal servomotor, operating mode normally closed (NC), for mounting on the return valves of the TECEfloor SLQ heating circuit manifold. Opened at the factory (first-open function), facilitates easy screwing onto the control valves and filling and flushing the system. The servomotor can be opened again at any time for servicing (re-open function). Protection class IP 54, therefore mountable 360° in any position. Robust union nut connection M 30 x 1.5 mm made of nickel-plated brass, lifting and closing dimension tailored to TECEfloor heating circuit manifolds, connection voltage 24 V/230 V. SLQ quality-monitored and tested for compatibility.



Version	Item No.	DU 1	DU 2
230 V	77490017	1 pc.	8 pc.
24 V	77490022	1 pc.	8 pc.

TECEfloor SLQ servomotor building control system

Servomotor, normally closed (NC) when no current flowing, for mounting on return valves of SLQ heating circuit manifolds, for the direction connection of a building control system (BCS), control voltage 0-10 V, protection class IP 54, consequently, mounts 360° in any position, connection voltage 24 V.
Length of connection cable: 1 m



Item No.	DU 1	DU 2
77490021	1 pc.	100 pc.

TECEfloor – Accessories

TECEfloor tension belt 20 mm

Tension belt for fixing started pipe rolls during transport and storage.

Item No.	DU 1	DU 2
77920010	1 pc.	50 pc.



TECEfloor tool case dimension 16, type TECElogo-Push

Complete tool set to cut to length, deburr and calibrate TECEfloor system pipes, dimension 16 - type SLQ PE-RT 5S, SLQ PE-Xa 5S and SLQ Al/PE-RT - in combination with TECEfloor Eurocone push-fittings type TECElogo-Push. Consists of pipe scissors, calibrator, handle, hook wrench and open-end wrench.

Dimension	Item No.	DU 1
16	77920041	1 pc.



TECE pipe cutter

Dimension	Item No.	DU 1
14-25	8760002	1 pc.



TECEfloor SLQ pipe calibrator dim. 12/14/16/17/20

SLQ pipe calibrator 12/14/16/17/20 with adapted cutting geometry, to deburr and calibrate pipe ends when SLQ clamping ring connections are used, SLQ tested system tool.

Dimension	Item No.	DU 1
12/14/16/17/20	77920001	1 pc.



TECEfloor tool set dimension 16, type TECElogo-Push

Tool set to deburr and calibrate the TECEfloor system pipes - type SLQ PE-RT 5S, SLQ PE-Xa 5S and SLQ Al/PE-RT - in combination with TECEfloor Eurocone push-fittings type TECElogo-Push. Consists of manual calibrator and hook wrench.

Dimension	Item No.	DU 1
16	77920040	1 pc.



TECEfloor expanding head, suitable for pipe expanding tool RAZ-V

SLQ expanding head for expanding PE-Xc and PE-RT all-plastic pipes for installing the SLQ pressure sleeve coupling, not suitable for Al composite pipes.

Dimension	Item No.	DU 1
17 x 2	77921700	1 pc.
20 x 2 (20 L)	77922000	1 pc.
25 x 2,5 (25 L)	77922500	1 pc.



TECE laying winder

Laying winder, foldable, variably adjustable for TECEfloor, TECEflex and TECElogo rolls up 600 m length.

Dimension	Item No.	DU 1
up to 600 m	720193	1 pc.

**TECEfloor roll dispenser**

Universal roll dispenser for rolls of TECE pipe, length 200-800 m, width adjustment of inner roll diameter (D_i) 200-900 mm, outer roll diameter (D_a) 600-1300 mm.

Item No.	DU 1
77920020	1 pc.




TECEfloor – Spare parts

77610001 – TECEfloor tacking tool T8 extra


77610024 – TECEfloor standard tacking tool 6 mm

Pos.	Item No.	Designation	DU 1
1	77990054	Coil spring for tacking tools	1 pc.
2	77990055	Inspection opening for tacking tools	1 pc.
3	77990056	Stand for tacking tools	1 pc.




TECEfloor stainless steel heating circuit manifold with flow rate indicator

Pos.	Item No.	Designation	DU 1
1	77990062	Return valve manual cap	1 pc.
2	77990052	Return valve	1 pc.
3	77990072	Pipe connector return	5 pc.
4	77990061	Vent G 1/2" for manifold	1 pc.
5	77990060	Filling/emptying valve 1/2" for manifold	1 pc.
6	77990051	Flow valve with flow rate indicator	1 pc.
7	77990070	Inspection glass flow meter, 0.5-4.0 l/min	5 pc.
	77990098	Inspection glass flow meter, 0.2-5.0 l/min	5 pc.
8	77990071	Pipe connector flow	5 pc.
9	77990053	Manifold holder set	1 pc.

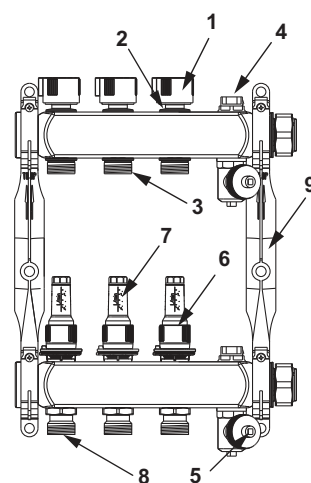


TECEfloor comfort heating circuit manifold with flow indicator, type TECLogo-Push

Pos.	Item No.	Designation	DU 1
1	77990062	Return valve manual cap	1 pc.
2	77990017	Valve insert for plastic heating circuit manifold	1 pc.
3	77990016	Flow rate indicator for plastic heating circuit manifold	1 pc.
4	77990053	Manifold holder set	1 pc.

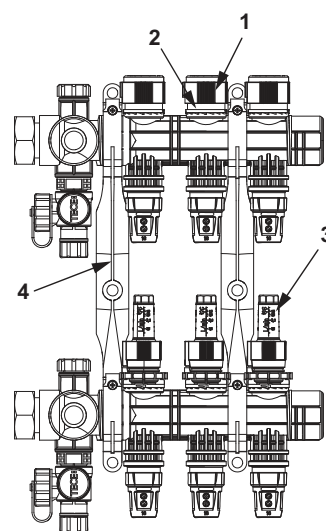


TECEfloor stainless steel heating circuit manifold type TECElogo-Push with flow rate indicator

Pos.	Item No.	Designation	DU 1
1	77990062	Return valve manual cap	1 pc.
2	77990052	Return valve	1 pc.
3	77990072	Pipe connector return	5 pc.
4	77990053	Manifold holder set	1 pc.
5	77990078	Filling/emptying tap G 1" for TECEfloor Push heating circuit manifold	1 pc.
6	77990051	Flow valve with flow rate indicator	1 pc.
7	77990070	Inspection glass flow meter, 0.5-4.0 l/min	5 pc.
	77990098	Inspection glass flow meter, 0.2-5.0 l/min	5 pc.
8	77990071	Pipe connector flow	5 pc.

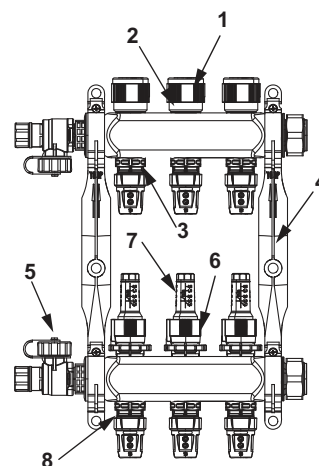


77390010 – TECEfloor plastic heating circuit manifold basic module

Pos.	Item No.	Designation	DU 1
1	77990053	Manifold holder set	1 pc.
2	77990038	Push-in thermometer for control station	1 pc.

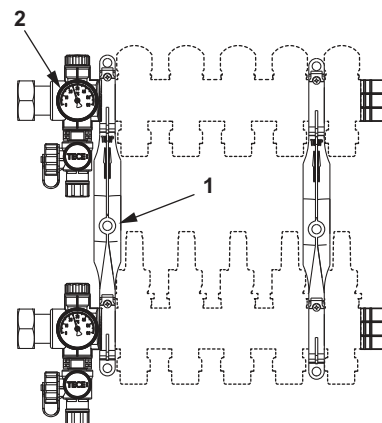

TECEfloor plastic heating circuit manifold connection module with flow rate indicator


Pos.	Item No.	Designation	DU 1
1	77990062	Return valve manual cap	1 pc.
2	77990017	Valve insert for plastic heating circuit manifold	1 pc.
3	77990016	Flow rate indicator for plastic heating circuit manifold	1 pc.

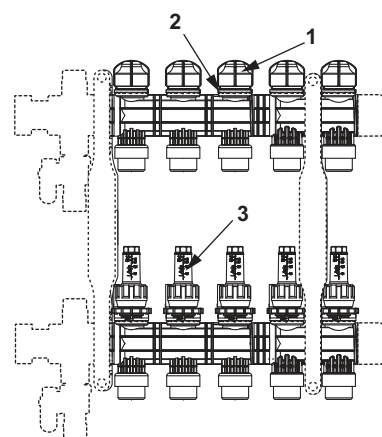

TECEfloor – Spare parts


77450000 – TECEfloor fixed value control 20-55 °C

Pos.	Item No.	Designation	DU 1
1	77990036	Thermostat head with remote sensor for fixed value control	1 pc.
2	77990037	Circulating pump ES 15-60/130 mm for control station with pump	1 pc.
3	77990038	Push-in thermometer for control station	1 pc.

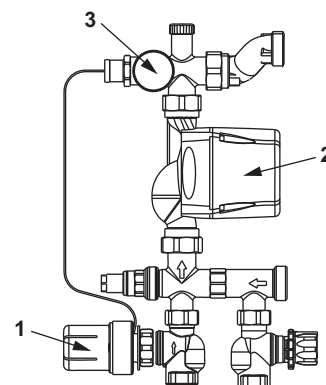


TECEfloor Comfort manifold cabinet UP 110

Pos.	Item No.	Designation	DU 1
1	77351701	Door for Comfort flush-mounted cabinet, 400 mm	1 pc.
	77351702	Door for Comfort flush-mounted cabinet, 540 mm	1 pc.
	77351703	Door for Comfort flush-mounted cabinet, 690 mm	1 pc.
	77351704	Door for Comfort flush-mounted cabinet, 840 mm	1 pc.
	77351705	Door for Comfort flush-mounted cabinet, 990 mm	1 pc.
	77351706	Door for Comfort flush-mounted cabinet, 1140 mm	1 pc.
2	77990101	Screed panel for Comfort flush-mounted cabinet, 400 mm	NEW 1 pc.
	77990102	Screed panel for Comfort flush-mounted cabinet, 540 mm	NEW 1 pc.
	77990103	Screed panel for Comfort flush-mounted cabinet, 690 mm	NEW 1 pc.
	77990104	Screed panel for Comfort flush-mounted cabinet, 840 mm	NEW 1 pc.
	77990105	Screed panel for Comfort flush-mounted cabinet, 990 mm	NEW 1 pc.
	77990106	Screed panel for Comfort flush-mounted cabinet, 1140 mm	NEW 1 pc.

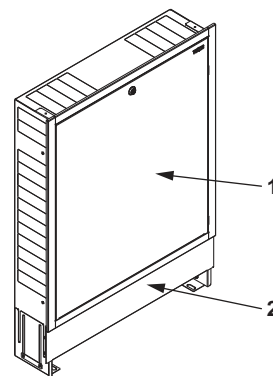


TECEfloor Comfort manifold cabinet UP 80

Pos.	Item No.	Designation	DU 1
1	77351702	Door for Comfort flush-mounted cabinet, 540 mm	1 pc.
	77351703	Door for Comfort flush-mounted cabinet, 690 mm	1 pc.
	77351704	Door for Comfort flush-mounted cabinet, 840 mm	1 pc.
	77351705	Door for Comfort flush-mounted cabinet, 990 mm	1 pc.
2	77990102	Screed panel for Comfort flush-mounted cabinet, 540 mm	NEW 1 pc.
	77990103	Screed panel for Comfort flush-mounted cabinet, 690 mm	NEW 1 pc.
	77990104	Screed panel for Comfort flush-mounted cabinet, 840 mm	NEW 1 pc.
	77990105	Screed panel for Comfort flush-mounted cabinet, 990 mm	NEW 1 pc.

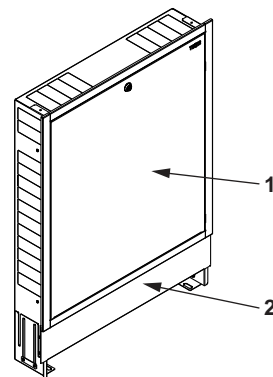


TECEfloor manifold cabinet 110 - flush-mounted

Pos.	Item No.	Designation	DU 1
1	77990040	Manifold mounting for concealed cabinets	1 pc.
2	77990012	Turning lock for manifold cabinet door	1 pc.
3	77990043	Insert tab for concealed cabinet trim	1 pc.
4	77990020	Screed panel for flush-mounted cabinet 400	1 pc.
	77990021	Screed panel for flush-mounted cabinet 540	1 pc.
	77990022	Screed panel for flush-mounted cabinet 690	1 pc.
	77990023	Screed panel for flush-mounted cabinet 840	1 pc.
	77990024	Screed panel for flush-mounted cabinet 990	1 pc.
	77990025	Screed panel for flush-mounted cabinet 1140	1 pc.
5	77990026	Frame/door for flush-mounted cabinet 400	1 pc.
	77990027	Frame/door for flush-mounted cabinet 540	1 pc.
	77990028	Frame/door for flush-mounted cabinet 690	1 pc.
	77990029	Frame/door for flush-mounted cabinet 840	1 pc.
	77990030	Frame/door for flush-mounted cabinet 990	1 pc.
	77990031	Frame/door for flush-mounted cabinet 1140	1 pc.

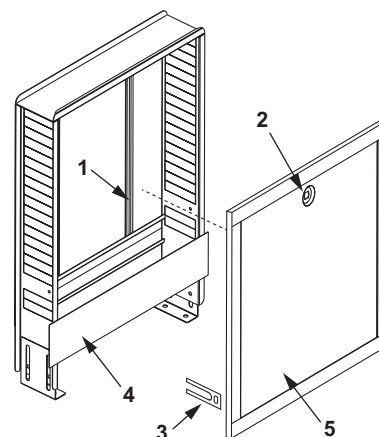


TECEfloor manifold cabinet 80 - flush-mounted

Pos.	Item No.	Designation	DU 1
1	77990040	Manifold mounting for concealed cabinets	1 pc.
2	77990012	Turning lock for manifold cabinet door	1 pc.
3	77990043	Insert tab for concealed cabinet trim	1 pc.
4	77990020	Screed panel for flush-mounted cabinet 400	1 pc.
	77990021	Screed panel for flush-mounted cabinet 540	1 pc.
	77990022	Screed panel for flush-mounted cabinet 690	1 pc.
	77990023	Screed panel for flush-mounted cabinet 840	1 pc.
	77990024	Screed panel for flush-mounted cabinet 990	1 pc.
	77990025	Screed panel for flush-mounted cabinet 1140	1 pc.
5	77990026	Frame/door for flush-mounted cabinet 400	1 pc.
	77990027	Frame/door for flush-mounted cabinet 540	1 pc.
	77990028	Frame/door for flush-mounted cabinet 690	1 pc.
	77990029	Frame/door for flush-mounted cabinet 840	1 pc.
	77990030	Frame/door for flush-mounted cabinet 990	1 pc.
	77990031	Frame/door for flush-mounted cabinet 1140	1 pc.

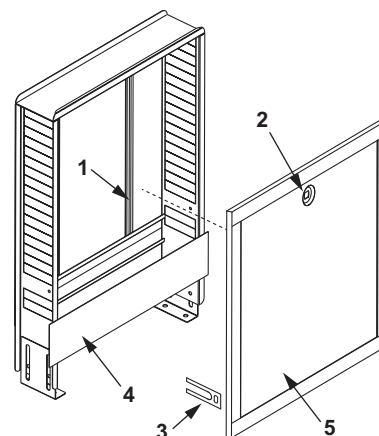

TECEfloor design RTL box shell set


Pos.	Item No.	Designation	DU 1
1	77990064	Accessory pack RTL box shell set	1 pc.

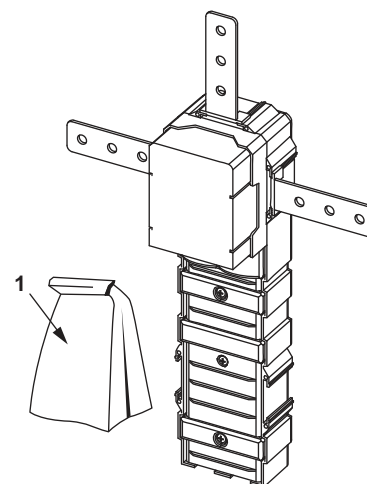

TECEfloor – Spare parts


TECEfloor Design RTL box fine installation set

Pos.	Item No.	Designation	DU 1
1	77990067	Glass plate RTL box, black	1 pc.
	77990068	Glass plate RTL box, white	1 pc.
2	77990095	RTL box control button, knurled aluminium	1 pc.
3	77990065	Accessory pack RTL box fine installation set	1 pc.

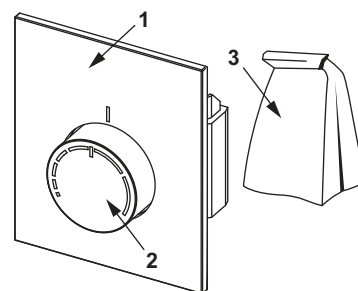

8760002 – TECE pipe cutter

Pos.	Item No.	Designation	DU 1
1	8760003	Spare blade for pipe cutter	1 pc.



Item No.		DU 1	DU 2	DU 3	Page
700004	SALE	1	-	-	44
700516		50	500	1000	12
700520		50	500	1000	12
700525		50	350	700	12
702016		120	1200	2400	12
702020		75	750	1500	12
702025		75	525	1050	12
704016		50	500	-	13
704020		50	500	-	13
704025		50	150	-	13
704801		10	-	-	25, 91
704802		6	-	-	25, 91
704803		10	500	-	25, 92
704805		1	-	-	25, 92
704808		10	500	-	45, 109
704809		10	30	-	25, 92
704811		10	50	-	25, 91
704812		10	50	-	25, 91
704813		10	500	-	25, 92
704814		10	500	-	45, 109
705102		10	100	-	14, 44
705103		10	100	-	14
705104		10	100	-	14
705105		10	100	-	14
705106		5	20	-	14
705107		5	20	-	14
705108		2	20	-	14
705109		2	10	-	14
705110		1	5	-	14
705601		10	100	-	14, 44
705602		10	100	-	14
705603		10	100	-	14
705604		10	100	-	14
705605		10	50	-	14
705606		10	50	-	14
705607		5	50	-	14
705608		5	50	-	14
705609		2	20	-	14
705610		2	10	-	14
705611		1	5	-	14
706216		10	100	-	14
706220		10	100	-	14
706225		10	50	-	14
706232		5	50	-	14
706240		2	20	-	14
706250		2	10	-	14
706263		1	5	-	14
706603		10	100	-	15
706604		10	50	-	15
706605		10	50	-	15

Item No.		DU 1	DU 2	DU 3	Page
706606		5	30	-	15
706607		5	30	-	15
706608		2	20	-	15
706609		2	10	-	15
706610		1	5	-	15
707165		2	10	-	16
707166		1	5	-	16
707167		10	40	-	16
707168		5	20	-	16
707169		2	20	-	16
707316		10	200	-	15
707320		10	100	-	15
707325		10	40	-	15
707332		5	40	-	15
707340		2	20	-	15
707350		2	10	-	15
707363		1	5	-	15
707801		10	80	-	16
707802		10	80	-	16
707803		10	60	-	16
707804		10	50	-	16
707805		10	50	-	16
707806		10	20	-	16
708100		10	150	-	16
708101		10	150	-	16
708102		10	150	-	16
708103		10	50	-	16
708104		10	40	-	16
708105		5	20	-	16
708106		2	10	-	16
708107		2	10	-	16
708606		10	30	-	21
708607		10	30	-	21
708608		10	30	-	21
708610		10	100	-	20, 44
708611		10	50	-	20
708612		10	30	-	20
708613		10	20	-	20
708614		10	20	-	20
708625		10	30	-	21
708626		10	30	-	21
708628		10	30	-	21
708630		10	100	-	19
708631		10	100	-	19
708632		10	50	-	19
708633		10	50	-	20
708705		10	20	-	21
708706		10	40	-	22
709801		10	60	-	17
709802		10	40	-	17

Article quick search

Item No.		DU 1	DU 2	DU 3	Page
709803		10	30	-	17
709804		10	20	-	17
709805		5	20	-	17
709806		1	10	-	17
709807		1	10	-	17
709808		1	5	-	17
709809		1	10	-	17
709810		1	10	-	17
709811		1	5	-	17
710116		10	150	-	17
710120		10	80	-	17
710125		10	40	-	17
710132		5	20	-	17
710140		2	10	-	17
710150		1	5	-	17
710163		1	5	-	17
710601		10	50	-	18
710602		10	50	-	18
710603		10	100	-	18
710604		10	100	-	18
710605		10	40	-	18
710606		10	30	-	18
710607		10	30	-	18
710608		10	20	-	18
710609		10	40	-	18
710610		5	40	-	18
710611		5	30	-	18
710612		5	30	-	18
710613		5	30	-	18
710614		2	20	-	18
710615		2	20	-	18
710616		2	8	-	18
710617		2	20	-	18
710618		1	5	-	18
710619		1	5	-	18
710620		1	5	-	18
710621		1	5	-	18
710622		1	5	-	18
710623		1	5	-	18
712201		1	12	-	34
712202		1	12	-	34
712540		1	-	-	33, 100
712541		1	-	-	33, 100
712542		1	-	-	33, 100
712543		1	-	-	33, 100
712544		1	-	-	33, 100
712545		1	-	-	33, 100
712546		1	-	-	33, 100
712547		1	-	-	33, 100
712548		1	-	-	33, 100

Item No.		DU 1	DU 2	DU 3	Page
712549		1	-	-	33, 100
712550		1	-	-	33, 100
712551	SALE	1	-	-	34, 101
712552	SALE	1	-	-	34, 101
712553	SALE	1	-	-	34, 101
712554	SALE	1	-	-	34, 101
712555	SALE	1	-	-	34, 101
712556	SALE	1	-	-	34, 101
712557	SALE	1	-	-	34, 101
712558	SALE	1	-	-	34, 101
712559	SALE	1	-	-	34, 101
712560	SALE	1	-	-	34, 101
712561	SALE	1	-	-	34, 101
712562	SALE	1	-	-	34, 101
713014		10	100	-	30
713020		10	100	-	30
713314		10	100	-	30
713316		10	100	-	30
713320		10	100	-	30
713516		10	100	-	30
713805		10	100	-	31
713806		10	100	-	31
713816		5	100	-	22
713914		10	150	-	22
713916		10	150	-	22
713920		10	100	-	22
713925		10	50	-	22
714014		10	50	-	27
714016		10	50	-	27
714020		10	50	-	27
714516		6	60	-	27
714901		1	10	-	27
714905		1	10	-	27
714907		1	5	-	28
715016		10	60	-	27
715020		10	50	-	27
716116		1	5	-	28
716316		10	150	-	22
716320		10	100	-	22
716321		10	100	-	22
716325		10	50	-	22
716332		10	50	-	22
716350		10	100	-	22
716351		10	100	-	22
716352		10	50	-	22
717501		10	150	-	28, 96
717601		10	100	-	19
717602		10	100	-	19
717603		5	100	-	19
717604		5	50	-	19

Item No.		DU 1	DU 2	DU 3	Page
717605		5	50	-	19
717606		5	30	-	19
717607		1	25	-	19
717608		1	15	-	19
718017		10	40	-	24, 91
718020		1	10	-	28
718022		10	40	-	24, 91
718024		10	40	-	24, 91
718026		10	100	-	24, 91
718031		10	40	-	24, 91
718501		1	10	-	28
718502		1	10	-	28
718503		1	10	-	28
720005		1	-	-	43
720040		10	100	-	43
720041		1	20	-	45, 47
720042		1	20	-	45, 47
720043		1	20	-	45, 47
720045		1	20	-	45, 47
720046		1	20	-	45, 47
720048		1	-	-	46
720050		1	-	-	40
720056		1	-	-	40
720060		1	-	-	46
720061		1	20	-	46
720062		1	20	-	46
720063		1	20	-	46
720064		1	50	-	46
720066		1	-	-	46
720067		1	-	-	46
720069		1	-	-	46
720072		1	-	-	46
720079		1	20	-	46
720090		1	-	-	43
720091		1	-	-	46
720093		1	-	-	43
720095		1	-	-	45
720096		1	-	-	46
720097		1	-	-	46
720102		1	-	-	46
720110		1	-	-	46
720115		1	-	-	46
720128		1	-	-	42
720150		1	-	-	46
720153		1	-	-	46
720156		1	-	-	46
720157		1	-	-	46
720158		1	-	-	46
720160		1	-	-	46
720161		1	-	-	46

Item No.		DU 1	DU 2	DU 3	Page
720162		1	-	-	46
720165		1	-	-	46
720166		1	-	-	46
720167		1	-	-	46
720168		1	-	-	46
720169		1	-	-	46
720170		1	-	-	42
720175		1	-	-	47, 48
720179		1	-	-	47, 48
720193		1	-	-	43, 107, 171
720194		1	-	-	43, 107
720202		1	-	-	45, 46
720203		1	-	-	40
720204		1	-	-	40
720205		1	-	-	48
720206		1	-	-	48
720207		1	-	-	48
720208		1	-	-	48
720210		1	-	-	47, 48
720211		1	-	-	47, 48
720212		1	-	-	47, 48
720213		1	-	-	49
720214		1	-	-	49
720215		1	-	-	49
720216		1	-	-	49
720217		1	-	-	49
720218		1	-	-	49
720219		1	-	-	49
720220		1	-	-	49
720221		1	-	-	49
720222		1	-	-	42, 106
720223		1	-	-	42, 106
720235	NEW	1	-	-	48
720236	NEW	1	-	-	47, 48
720237	NEW	1	-	-	47, 48
720240	NEW	1	-	-	40
720241	NEW	1	-	-	41
720242	NEW	1	-	-	41
720524		100	3000	-	26, 93
720527		10	80	-	26, 92
720528		5	20	-	26, 92
720550		5	25	-	24
720565		1	10	-	23
720567		1	10	-	23
720568		1	10	-	23
720569		1	10	-	24
720579		12.5	225	-	39, 93
720580	SALE	1	10	-	38
720581	SALE	1	10	-	38
720582	SALE	1	10	-	38

Article quick search

Item No.		DU 1	DU 2	DU 3	Page
720583	SALE	1	10	-	38
720584	SALE	1	10	-	39
720590		10	100	-	20
720591		10	150	-	17
720592		10	100	-	18
720593		10	200	-	15
720594		10	100	-	14
720595		10	100	-	15
721005		5	25	-	26, 92
721009		1	10	-	23
730010		1	25	-	27, 95
730025		1	20	-	28, 96
730504		10	50	-	18
730508		10	50	-	18
730509		10	100	-	18
730511		10	100	-	18
730514		10	30	-	18
730515		10	20	-	18
730516		10	40	-	18
730519		5	30	-	18
730520		5	30	-	18
730521		10	40	-	18
730522		10	30	-	18
730523		5	30	-	18
730524		2	8	-	18
730525		2	20	-	18
730533		2	20	-	18
730536		2	20	-	18
730537		5	40	-	18
730544		10	40	-	18
730616		10	200	-	20
730620		10	200	-	20
730916		10	150	-	17, 44
730920		10	80	-	17
730925		10	40	-	17
730932		5	20	-	17
730940		2	10	-	17
731016		75	525	1050	8
731020		50	350	700	8
731025		25	175	350	8
731116		75	300	600	9
731120		75	300	600	9
731125		50	200	400	9
731316		75	300	600	9
731320		75	300	600	9
731325		50	200	400	9
731616		75	225	450	9
731620		75	225	450	9
731625		50	150	300	9
731916		50	150	300	10

Item No.		DU 1	DU 2	DU 3	Page
731920		50	150	300	10
731925		25	100	200	10
732016		100	1000	2000	8
732020		100	700	1400	8
732025		50	250	500	8
732032		25	125	250	8
732116		75	225	450	10
732120		75	225	450	10
732125		50	150	300	10
732216		100	-	-	8
732220		70	-	-	8
732225		45	-	-	8
732232		30	-	-	8
732240		15	-	-	8
732250		15	-	-	8
732263		5	-	-	8
732316		100	1000	2000	11, 36
732320		100	700	1400	11, 36
732325		50	250	500	11, 36
732330		25	250	-	11, 36
732331		25	250	-	11, 36
732332		25	250	-	11, 36
732416		100	-	-	11, 36
732420		70	-	-	11, 36
732425		45	-	-	11, 36
732432		30	-	-	11, 36
732616		25	50	100	10
732620		25	50	100	10
732625		25	50	100	10
734516		50	500	32000	13, 44
734520		50	500	32000	13
734525		50	250	16000	13
734532		25	100	-	13
734540		15	60	-	13
734550		10	50	-	13
734563		5	20	-	13
736016		10	100	-	14, 44
736020		10	100	-	14
736025		10	50	-	14
736032		5	50	-	14
736040		2	20	-	14
736503		10	100	-	15
736504		10	50	-	15
736505		10	50	-	15
736506		5	30	-	15
736507		5	30	-	15
736508		2	20	-	15
737016		10	200	-	15, 44
737020		10	100	-	15
737025		10	40	-	15

Item No.		DU 1	DU 2	DU 3	Page
737032		5	40	-	15
737040		2	20	-	15
750202		1	10	-	37
750204		1	10	-	37
750206		1	10	-	37
750208		1	10	-	37
750210		1	10	-	37
751016		1	10	-	32
751020		1	10	-	32
751116		1	10	-	32
751120		1	10	-	32
760016		10	150	-	17
760020		10	80	-	17
760025		10	40	-	17
760032		5	20	-	17
760040		2	10	-	17
760504		10	50	-	18
760508		10	50	-	18
760509		10	100	-	18
760511		10	100	-	18
760514		10	30	-	18
760515		10	20	-	18
760516		10	40	-	18
760517		5	30	-	18
760518		5	40	-	18
760519		5	30	-	18
760520		5	30	-	18
760521		10	40	-	18
760522		10	30	-	18
760523		5	30	-	18
760524		2	8	-	18
760525		2	20	-	18
760526		1	5	-	18
760529		5	20	-	18
760533		2	20	-	18
760534		1	5	-	18
760536		2	20	-	18
760537		5	40	-	18
760543		2	20	-	18
760544		10	40	-	18
762201		1	12	-	34
762202		1	12	-	34
763616		10	100	-	31
763620		10	100	-	31
765002		10	100	-	14
765003		10	100	-	14
765004		10	100	-	14
765007		10	100	-	14
765008		5	20	-	14
765009		5	20	-	14

Item No.		DU 1	DU 2	DU 3	Page
765010		2	20	-	14
765116		10	200	-	20
765120		10	200	-	20
765130		1	10	-	23
765502		10	100	-	14
765503		10	100	-	14
765504		10	100	-	14
765506		10	100	-	14
765507		10	50	-	14
765508		10	50	-	14
765509		5	50	-	14
765510		5	50	-	14
765511		2	20	-	14
765512		2	10	-	14
765513		1	5	-	14
765514		10	100	-	14
766016		10	100	-	14
766020		10	100	-	14
766025		10	50	-	14
766032		5	50	-	14
766040		2	20	-	14
766050		2	10	-	14
766063		1	5	-	14
766503		10	100	-	15
766504		10	50	-	15
766505		10	50	-	15
766506		5	30	-	15
766507		5	30	-	15
766508		2	20	-	15
766509		2	10	-	15
767016		10	200	-	15
767020		10	100	-	15
767025		10	40	-	15
767032		5	40	-	15
767040		2	20	-	15
767050		2	10	-	15
767063		1	5	-	15
767125		10	40	-	16
767132		5	20	-	16
767140		2	20	-	16
767501		10	60	-	16
767516		10	80	-	16
767520		10	80	-	16
767525		10	50	-	16
767526		10	50	-	16
767532		10	20	-	16
767570		10	100	-	19
767572		5	100	-	19
767573		5	50	-	19
767574		5	50	-	19

Article quick search

Item No.		DU 1	DU 2	DU 3	Page
767575		10	100	-	19
767576		5	50	-	19
767578		10	100	-	19
767579		5	100	-	19
767581		5	30	-	19
767590		10	100	-	19
767591		10	100	-	19
767592		10	40	-	19
768002		10	50	-	16
768016		10	150	-	16
768020		10	150	-	16
768025		10	40	-	16
768032		5	20	-	16
768501		10	30	-	21
768502		10	20	-	20
768503		10	100	-	20
768516		10	100	-	20
768520		10	50	-	20
768525		10	30	-	20
768526		10	20	-	20
769516		10	60	-	17
769520		10	40	-	17
769522		10	30	-	17
769525		10	20	-	17
769527		5	20	-	17
769532		5	20	-	17
769534		1	10	-	17
769540		1	10	-	17
782016		50	500	-	11, 37
782020		50	350	-	11, 37
782025		25	150	-	11, 37
782032		25	125	-	11, 36
782033		25	250	-	11, 36
782103		75	525	-	8
782104		75	525	-	9
782105		50	350	-	8
782106		50	350	-	9
785036		100	2000	-	39, 104
785037		100	2000	-	39, 104
785038		50	1000	-	39, 104
785039		50	1000	-	39, 104
785040		50	1000	-	39, 104
785041		25	250	-	39, 104
7136161		10	100	-	31
7136201		10	100	-	31
8610002		10	100	-	83
8610003		10	100	-	83
8610004		10	80	-	83
8610005		10	50	-	83
8610006		5	50	-	83

Item No.		DU 1	DU 2	DU 3	Page
8610007		1	20	-	83
8610008		1	20	-	83
8610009		1	8	-	83
8610100		10	100	-	83
8610102		10	100	-	83
8610103		10	100	-	83
8610104		10	80	-	83
8610105		10	50	-	83
8610106		10	50	-	83
8610107		10	50	-	83
8610108		10	100	-	98
8610109		10	50	-	98
8610116		1	20	-	83
8610117		1	20	-	83
8610118		1	8	-	83
8610202		10	100	-	85
8610203		10	100	-	85
8610204		10	80	-	85
8610205		10	50	-	85
8610206		1	20	-	85
8610302		10	100	-	85
8610303		10	80	-	85
8610304		10	80	-	85
8610305		10	50	-	85
8610306		10	50	-	85
8610312		1	20	-	85
8610402		10	80	-	86
8610403		10	50	-	86
8610404		10	40	-	86
8610406		1	8	-	86
8610408		1	8	-	86
8610410		1	4	-	86
8611205		10	80	-	98
8611210		10	80	-	98
8611211		10	80	-	98
8611212		10	80	-	98
8620002		10	80	-	88
8620003		10	60	-	88
8620007		10	40	-	88
8620008		10	50	-	89
8620009		10	40	-	89
8620100		1	5	-	93
8620103		1	5	-	94
8630002		1	20	-	102
8630003		1	20	-	102
8630200		5	80	-	87
8630201		5	80	-	87
8630202		5	80	-	87
8630203		5	50	-	87
8630204		5	50	-	87

Item No.		DU 1	DU 2	DU 3	Page
8630205		1	20	-	87
8630207		1	20	-	87
8640001		10	50	-	98
8700140		15	-	-	80
8700150		15	-	-	80
8700163		5	-	-	80
8702016		75	225	450	81
8702020		75	225	450	81
8702025		50	150	300	81
8702116		75	300	600	81
8702120		75	300	600	81
8702125		50	200	400	81
8702216		50	150	300	82
8702220		50	150	300	82
8702225		25	100	200	82
8702416		75	225	450	82
8702420		75	225	450	82
8702425		50	150	300	82
8702516		75	300	600	81
8702520		75	300	600	81
8702525		50	200	400	81
8702616		25	50	100	82
8702620		25	50	100	82
8702625		25	50	100	82
8705016		100	1000	2000	80
8705020		100	700	1400	80
8705025		50	350	700	80
8705116		100	-	-	80
8705120		70	-	-	80
8705125		45	-	-	80
8705132		30	-	-	80
8705216		75	525	1050	80
8705220		50	350	700	80
8705225		25	175	350	80
8705232		25	125	250	80
8709016		75	525	1050	80
8709017		75	525	1050	81
8709020		50	350	700	80
8709021		50	350	700	81
8710516		10	80	-	84
8710520		10	80	-	84
8710525		10	80	-	84
8710532		1	20	-	84
8710540		1	20	-	84
8710550		1	8	-	84
8710563		1	4	-	84
8710616		10	80	-	84
8710620		10	80	-	84
8710625		10	80	-	84
8710632		1	20	-	84

Item No.		DU 1	DU 2	DU 3	Page
8710633		1	20	-	84
8710640		1	20	-	84
8710650		1	8	-	84
8710663		1	4	-	84
8710716		10	100	-	84, 108
8710720		10	50	-	84
8710725		10	40	-	84
8710732		1	20	-	84
8710740		1	8	-	84
8710750		1	4	-	84
8710763		1	4	-	84
8710817		10	50	-	87
8710821		10	50	-	87
8710916		10	40	-	86, 108
8710920		10	40	-	86
8710925		10	40	-	86
8710932		1	8	-	86
8710940		1	8	-	86
8710950		1	4	-	86
8710963		1	4	-	86
8711004		10	40	-	86
8711005		10	40	-	86
8711006		10	40	-	86
8711007		10	40	-	86
8711008		10	40	-	86
8711009		10	40	-	86
8711010		10	40	-	86
8711011		10	40	-	86
8711012		1	8	-	86
8711013		1	8	-	86
8711014		1	8	-	86
8711015		1	8	-	86
8711017		1	8	-	86
8711018		1	8	-	86
8711019		1	8	-	86
8711020		1	4	-	86
8711021		1	4	-	86
8711022		1	4	-	86
8711023		1	4	-	86
8711116		10	100	-	84
8711120		10	50	-	84
8711125		10	40	-	84
8711206		10	100	-	98
8711207		10	100	-	98
8711225		10	40	-	85
8711232		5	20	-	85
8711240		2	20	-	85
8711250		2	10	-	85
8711263		1	5	-	85
8713002		10	100	-	83, 108

Article quick search

Item No.		DU 1	DU 2	DU 3	Page
8713003		10	100	-	83
8713004		10	80	-	83
8713005		10	50	-	83
8713006		5	50	-	83
8713007		1	20	-	83
8713008		1	20	-	83
8713009		1	8	-	83
8713010		1	4	-	83
8713102		10	100	-	83, 108
8713103		10	100	-	83
8713104		10	80	-	83
8713105		10	50	-	83
8713106		10	50	-	83
8713107		10	50	-	83
8713108		1	20	-	83
8713109		1	20	-	83
8713110		1	8	-	83
8713111		1	4	-	83
8713202		10	100	-	85
8713203		10	100	-	85
8713204		10	80	-	85
8713205		10	50	-	85
8713206		1	20	-	85
8713302		10	100	-	85
8713303		10	80	-	85
8713304		10	80	-	85
8713305		10	50	-	85
8713306		10	50	-	85
8713307		1	20	-	85
8713402		10	80	-	86
8713403		10	50	-	86
8713404		10	40	-	86
8713405		1	8	-	86
8713406		1	8	-	86
8713407		1	4	-	86
8713408		1	4	-	86
8723002		10	80	-	88, 108
8723003		10	60	-	88
8723008		10	50	-	89
8723009		10	40	-	89
8723011		10	40	-	88
8723012		10	40	-	89
8723013		10	40	-	89
8723014		10	40	-	88
8723100		1	5	-	93
8723101		1	5	-	93
8723102		1	5	-	93
8730006		1	24	-	35, 102
8730007		1	24	-	35, 102
8730008		1	24	-	101

Item No.		DU 1	DU 2	DU 3	Page
8730009		1	24	-	101
8730010		1	24	-	35, 102
8730011		1	24	-	35, 102
8730014		1	25	-	35, 102
8730028		1	50	-	90
8730032		10	200	-	90
8730040		1	12	-	35, 102
8730050		10	50	-	90
8730100		10	100	-	87
8730101		10	100	-	87
8730102		10	50	-	87
8730215		5	80	-	87
8730216		5	80	-	87
8730310		10	50	-	87
8733002		1	20	-	102
8733003		1	20	-	102
8733201		5	80	-	87
8733202		5	80	-	87
8733203		5	50	-	87
8733204		5	50	-	87
8733205		1	20	-	87
8740216		10	200	-	98
8740220		10	200	-	98
8740401		10	50	-	95
8740402		10	50	-	95
8740403		10	40	-	95
8740404		10	40	-	95
8740405		1	5	-	95
8740406		1	5	-	95
8740431		1	20	-	29, 96
8740432		1	20	-	29, 96
8740433		1	20	-	29, 96
8740434		1	20	-	29, 97
8740435		1	10	-	29, 97
8740436		1	10	-	30, 97
8740437		1	10	-	30, 97
8740438		1	10	-	30, 97
8740439		2	100	-	30, 98
8740440		10	100	-	31, 99, 135
8740461		1	75	-	29, 96
8740463		1	20	-	29, 96
8740550		1	5	-	97
8760000		1	-	-	105, 108
8760001		1	-	-	105
8760002		1	-	-	105, 108, 170
8760003		1	-	-	109, 176
8760005		1	-	-	105
8760006		1	-	-	107
8760007		1	-	-	105
8760008		1	-	-	43, 107

Item No.		DU 1	DU 2	DU 3	Page
8760009		1	-	-	49, 110
8760010		1	-	-	105
8760011		1	-	-	106
8760016		1	-	-	105, 108
8760020		1	-	-	105
8760025		1	-	-	105
8760032		1	-	-	105
8760040		1	-	-	105
8760050		1	-	-	105
8760063		1	-	-	105
8760103		1	-	-	105, 108
8760125		1	-	-	106
8760132		1	-	-	106
8760140		1	-	-	106
8760150		1	-	-	106
8760163		1	-	-	106
8760316		1	-	-	107
8760320		1	-	-	107
8760325		1	-	-	107
8760416		1	-	-	106, 108
8760420		1	-	-	106
8760425		1	-	-	106
8760432		1	-	-	106
8760440		1	-	-	106
8760450		1	-	-	106
8760463		1	-	-	106
8780000		1	100	-	45, 109
8780016		1	10	-	103
8780020		1	10	-	103
8780100		1	100	-	45, 109
8780116		1	10	-	103
8780120		1	10	-	103
8780200		1	20	-	32, 103
8790003	SALE	1	-	-	108
8790116		10	100	-	109, 110
8790120		10	500	-	109, 110
8790125		10	100	-	110
8790132		10	100	-	110
8790140		10	100	-	110
8790150		10	100	-	110
8790163		10	100	-	110
8790201		10	100	-	109
8790202		10	100	-	109
77111220	SALE	200	2000	4000	132
77111222	NEW	200	2000	4000	132
77111612	SALE	120	1200	2400	132
77111614	NEW	120	1200	-	132
77111630	SALE	300	1200	2400	132
77111632		300	1200	2400	132
77111635	NEW	300	1200	2400	133

Item No.		DU 1	DU 2	DU 3	Page
77111660	SALE	600	1200	2400	132
77111662		600	1200	2400	132
77111665	NEW	600	1200	2400	133
77111730	SALE	300	1200	2400	132
77111732	NEW	300	1200	2400	132
77111756	SALE	560	1120	2240	132
77111758	NEW	560	1120	2240	132
77112030	SALE	300	900	1800	132
77112032	NEW	300	900	1800	132
77112060	SALE	600	2400	-	132
77112062	NEW	600	2400	-	132
77112540	SALE	400	2000	-	132
77112542	NEW	400	2000	-	132
77131612		120	1200	2400	134
77131630		300	1500	3000	134
77131660		600	1200	2400	134
77131712		120	840	1680	134
77131730		300	1200	2400	134
77131756		560	1120	2240	134
77132030		300	900	1800	134
77132061		600	2400	-	134
77151612		120	1200	2400	133
77151630		300	1500	3000	133
77151660		600	1200	2400	133
77171630		300	1200	2400	133
77171660		600	1200	2400	133
77171730		300	1200	2400	133
77171760		600	1200	2400	133
77172060		600	2400	-	133
77211200		10	200	-	135
77211600		10	200	-	135
77211700		10	200	-	135
77212000		10	200	-	135
77220012	NEW	1	10	100	136
77220015		1	10	100	136
77220016		1	10	100	136
77220017		1	10	100	136
77220020		1	10	100	136
77220025		1	10	100	136
77220034		10	100	-	135
77220035		1	50	-	135
77230016		2	100	-	136
77300001		1	10	-	148
77310002		1	-	-	148
77310003		1	-	-	148
77310004		1	-	-	148
77310005		1	-	-	148
77310006		1	-	-	148
77310007		1	-	-	148
77310008		1	-	-	148

Article quick search

Item No.		DU 1	DU 2	DU 3	Page
77310009		1	-	-	148
77310010		1	-	-	148
77310011		1	-	-	148
77310012		1	-	-	148
77310022		1	-	-	148
77310023		1	-	-	148
77311102	SALE	1	-	-	150
77311103	SALE	1	-	-	150
77311104	SALE	1	-	-	150
77311105	SALE	1	-	-	150
77311106	SALE	1	-	-	150
77311107	SALE	1	-	-	150
77311108	SALE	1	-	-	150
77311109	SALE	1	-	-	150
77311110	SALE	1	-	-	150
77311111	SALE	1	-	-	150
77311112	SALE	1	-	-	150
77311302	NEW	1	-	-	149
77311303	NEW	1	-	-	149
77311304	NEW	1	-	-	149
77311305	NEW	1	-	-	149
77311306	NEW	1	-	-	149
77311307	NEW	1	-	-	149
77311308	NEW	1	-	-	149
77311309	NEW	1	-	-	149
77311310	NEW	1	-	-	149
77311311	NEW	1	-	-	149
77311312	NEW	1	-	-	149
77311320	NEW	1	336	-	149
77311321	NEW	1	10	-	150
77351501		1	26	-	156
77351502		1	22	-	156
77351503		1	15	-	156
77351504		1	13	-	156
77351505		1	12	-	156
77351506		1	11	-	156
77351602		1	26	-	157
77351603		1	19	-	157
77351604		1	17	-	157
77351605		1	14	-	157
77351701		1	-	-	174
77351702		1	-	-	174
77351703		1	-	-	174
77351704		1	-	-	174
77351705		1	-	-	174
77351706		1	-	-	174
77351802		1	27	-	158
77351803		1	18	-	158
77351804		1	16	-	158
77351805		1	13	-	158

Item No.		DU 1	DU 2	DU 3	Page
77381001		1	20	-	151
77381002		1	20	-	151
77381003		1	16	-	151
77381006		1	-	-	153
77381008		1	-	-	151
77381009		1	20	-	151
77382005		1	10	-	152
77383001		1	10	-	152
77383002		1	10	-	152
77390010	SALE	1	-	-	150
77390012		1	10	-	149
77390020	SALE	1	-	-	151
77390030	SALE	1	-	-	151
77390040	SALE	1	-	-	151
77390110		1	-	-	152
77390114		1	10	-	153
77390116		1	120	-	152
77390117		1	80	-	152
77390120		1	-	-	153
77390130		1	-	-	153
77410030		1	-	-	161
77410031		1	-	-	161
77410032		1	-	-	161
77410033		1	-	-	161
77410034		1	-	-	162
77410035		1	-	-	162
77410036		1	-	-	162
77410037		1	-	-	162
77410039		1	-	-	162
77410041		1	-	-	162
77410043		1	-	-	162
77410045		1	-	-	162
77410050		1	-	-	163
77410051		1	54	-	161
77410052		13	260	-	162
77420050		1	24	-	165
77420051		1	24	-	164
77420052		1	24	-	164
77420053		1	24	-	164
77420055		1	24	-	165
77420060		1	17	-	167
77420061		1	17	-	167
77420064		1	6	-	166
77420065		1	6	-	166
77420066		1	6	-	166
77420070		1	40	-	167
77420071		1	40	-	168
77420072		1	17	-	167
77420073		1	34	-	168
77420074		1	150	-	168

Item No.		DU 1	DU 2	DU 3	Page
77420075		1	112	-	168
77430028		1	-	-	163
77430029		1	-	-	163
77430030		1	-	-	163
77430031		1	-	-	163
77430032		1	-	-	163
77430033		1	-	-	163
77430040		1	12	-	163
77450000		1	-	-	154
77450005		1	-	-	155
77450010		1	-	-	154
77450011		1	-	-	155
77460003		1	-	-	159
77460004		1	-	-	159
77460005		1	-	-	159
77460006		1	24	-	159
77470005		1	-	-	160
77470010		1	-	-	160
77470020		1	-	-	160
77470021		1	-	-	160
77470025		1	-	-	161
77470026		1	10	-	161
77490017		1	8	-	168
77490021		1	100	-	169
77490022		1	8	-	168
77510010		9.6	57.6	-	140
77510020		9.6	115.2	-	140
77510021		10	-	-	140
77510030		16.8	201.6	-	140
77510031		10	-	-	140
77520001		9	117	-	141
77520002		4.5	117	-	141
77520003		10	630	-	141
77520006		8.625	60.375	-	143
77520007		50	500	-	144
77520008		50	500	-	144
77520009	NEW	8.625	60.375	-	143
77520018		6.9	138	-	142
77520019		120	-	-	142
77520020		10	-	-	142
77520021		1	-	-	144
77520026		1	-	-	144
77520027		1	-	-	144
77531500		10	60	-	137
77531520		10	60	-	137
77531533		26	52	208	139
77531541		30	180	-	137
77570009		32	896	-	146
77570010		10	100	2400	146
77570015		10	100	1500	146

Item No.		DU 1	DU 2	DU 3	Page
77570025		32	800	-	146
77600010		1	36	-	137
77600020		1	-	-	137
77610001		1	-	-	138
77610010		200	4000	80000	138
77610016		300	6000	144000	138
77610023		300	78000	-	138
77610024		1	-	-	138
77610025		450	9000	-	139
77610026		1	-	-	139
77610027		450	9000	-	139
77611000		1000	-	-	145
77611001		1	10	-	144
77611020		1000	-	-	144
77612010		200	800	-	146
77612020		100	2000	-	146
77620012		160	960	-	146
77630010		18	-	-	147
77630025		10	50	-	147
77660012		75	-	-	147
77910010		25	200	-	39, 94, 146
77910011		25	100	-	39, 94, 146
77910012		25	100	-	39, 94, 146
77911016		50	1300	-	147
77911020		50	600	-	147
77920001		1	-	-	170
77920010		1	50	-	170
77920020		1	-	-	171
77920040		1	-	-	170
77920041		1	-	-	170
77921700		1	-	-	170
77922000		1	-	-	170
77922500		1	-	-	170
77990012		1	-	-	175
77990016		1	10	-	172, 173
77990017		1	10	-	172, 173
77990020		1	10	-	175
77990021		1	10	-	175
77990022		1	20	-	175
77990023		1	20	-	175
77990024		1	10	-	175
77990025		1	20	-	175
77990026		1	-	-	175
77990027		1	-	-	175
77990028		1	-	-	175
77990029		1	-	-	175
77990030		1	-	-	175
77990031		1	-	-	175
77990036		1	12	-	174
77990037		1	-	-	174

Article quick search

Item No.		DU 1	DU 2	DU 3	Page
77990038		1	-	-	173, 174
77990040		1	10	-	175
77990043		1	10	-	175
77990051		1	10	-	172, 173
77990052		1	10	-	172, 173
77990053		1	-	-	172, 173
77990054		1	-	-	172
77990055		1	-	-	172
77990056		1	-	-	172
77990060		1	10	-	172
77990061		1	10	-	172
77990062		1	-	-	172, 173
77990064		1	-	-	175
77990065		1	-	-	176
77990067		1	-	-	176
77990068		1	-	-	176
77990070		5	100	-	172, 173
77990071		5	-	-	172, 173
77990072		5	-	-	172, 173
77990078		1	50	-	173
77990095		1	-	-	176
77990097		1	10	-	158
77990098		5	100	-	172, 173
77990101	NEW	1	10	-	174
77990102	NEW	1	10	-	174
77990103	NEW	1	10	-	174
77990104	NEW	1	10	-	174
77990105	NEW	1	10	-	174
77990106	NEW	1	10	-	174

Item No.	Designation	State/Change	Substitute
700002	TECEflex starter set standard brass	Dropped	
700004	TECEflex starter set silicon bronze/PPSU	SALE	
712551	TECE stainless steel manifold 2 x 3/4" 1" flow & return bar for radiator conn.	SALE	
712552	TECE stainless steel manifold 3 x 3/4" 1" flow & return bar for radiator conn.	SALE	
712553	TECE stainless steel manifold 4 x 3/4" 1" flow & return bar for radiator conn.	SALE	
712554	TECE stainless steel manifold 5 x 3/4" 1" flow & return bar for radiator conn.	SALE	
712555	TECE stainless steel manifold 6 x 3/4" 1" flow & return bar for radiator conn.	SALE	
712556	TECE stainless steel manifold 7 x 3/4" 1" flow & return bar for radiator conn.	SALE	
712557	TECE stainless steel manifold 8 x 3/4" 1" flow & return bar for radiator conn.	SALE	
712558	TECE stainless steel manifold 9 x 3/4" 1" flow & return bar for radiator conn.	SALE	
712559	TECE stainless steel manifold 10 x 3/4" 1" flow & return bar for radiator conn.	SALE	
712560	TECE stainless steel manifold 11 x 3/4" 1" flow & return bar for radiator conn.	SALE	
712561	TECE stainless steel manifold 12 x 3/4" 1" flow & return bar for radiator conn.	SALE	
712562	TECE fill and drain set with ventilation 3/4" for TECE heating circuit manifold	SALE	
713932	TECEflex soldered connection TECEflex Cu made of standard brass, dim. 32 to 28/32 mm Cu	Dropped	
720172	TECEflex RazFaz accumulator-operated expansion tool incl. expansion heads dimension 16-32 in case	Dropped	720240
720173	TECEflex RazFaz battery expansion tool/case incl. pressing fork dimension 14-32	Dropped	720241
720174	TECEflex RazFaz tool set/case dimension 16-32, battery press and expansion tool	Dropped	720242
720209	TECEflex RazFaz replacement bolts	Dropped	720235
720235	TECE spare part replacement bolt for TECEflex RazFaz battery pressing tool	NEW	
720236	TECE spare part tool case empty for RazFaz compact units	NEW	
720237	TECE spare part Li-Ion battery 2.0 Ah for RazFaz compact units	NEW	
720240	TECEflex RazFaz compact accumulator-operated expanding tool incl. expansion heads dim. 16-32 in case	NEW	
720241	TECEflex RazFaz compact accumulator-operated pressing tool incl. pressing fork dim. 14-32 in case	NEW	
720242	TECEflex RazFaz compact tool set dim. 16-32, battery press and expansion tool	NEW	
720580	TECEflex hygienic closure set in case	SALE	
720581	TECEflex hygienic closure FT female thread Rp 1/2"-Rp 2", refill pack	SALE	
720582	TECEflex hygienic closure MT male thread R 1/2"-R 2", refill pack	SALE	
720583	TECEflex hygienic closure for nozzles dimension 16-63, refill pack	SALE	
720584	TECEflex hygienic closure for pipe dimension 16-63, refill pack	SALE	
730110	TECEflex skirting board radiator connection set 16 x 15 Cu x 16 mm, nickel-plated	Dropped	
730115	TECEflex skirting board radiator connection set 20 x 15 Cu x 20 mm, nickel-plated	Dropped	
730120	TECEflex skirting board radiator connection set 20 x 15 Cu x 16 mm, nickel-plated	Dropped	
730125	TECEflex skirting board radiator connection set 16 x 15 Cu x 20 mm, nickel-plated	Dropped	
730130	TECEflex skirting board radiator connection set 16 x 15 Cu x plugs, nickel-plated	Dropped	
730135	TECEflex skirting board radiator connection set plugs x 15 Cu x 16, nickel-plated	Dropped	
731014	TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT in corrugated sheath pipe, black, dim. 14, 15 x 2.6 mm, roll	Dropped	
732014	TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT, dim. 14, 15 x 2.6 mm, roll	Dropped	
732440	TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT, yellow, dim. 40, 40 x 4.0 mm, bar	Dropped	
732450	TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT, yellow, dim. 50, 50 x 4.5 mm, bar	Dropped	
732463	TECEflex multi-layer composite pipe PE-Xc/Al/PE-RT, yellow, dim. 63, 63 x 6.0 mm, bar	Dropped	
734514	TECEflex pressure sleeve for multi-layer composite pipe, dimension 14	Dropped	
8740421	TECElogo-Push skirting board radiator connection set dimension 16 x 15 Cu x 16	Dropped	
8740422	TECElogo-Push skirting board radiator connection set dimension 20 x 15 Cu x 20	Dropped	
8740423	TECElogo-Push skirting board radiator connection set dimension 16 x 15 Cu x 16 x plugs	Dropped	
8740424	TECElogo-Push skirting board radiator connection set plugs x 15 Cu x 16	Dropped	
8790002	TECElogo-Push initial equipment package incl. tool	Dropped	

Assortment changes

Item No.	Designation	State/Change	Substitute
8790003	TECElogo-Push starter set (red brass/Si-bronze, PPSU) dimension 16, includes tool	SALE	
77111220	TECEfloor SLQ 5S Multipipe underfloor heating pipe, dimension 12 x 1.5 mm, length 200 m	SALE	77111222
77111222	TECEfloor Soft-PERT 5S underfloor heating pipe, dim. 12 x 1.5, 200 m	NEW	
77111612	TECEfloor SLQ 5S Multipipe underfloor heating pipe, dimension 16 x 2 mm, length 120 m	SALE	77111614
77111614	TECEfloor Soft-PERT 5S underfloor heating pipe, dim. 16 x 2.0, 120 m	NEW	
77111630	TECEfloor SLQ 5S Multipipe underfloor heating pipe, dimension 16 x 2 mm, length 300 m	SALE	77111632
77111635	TECEfloor SLQ PE-RT 5S BMB surface heating pipe, dim. 16 x 2.0, 300 m	NEW	
77111660	TECEfloor SLQ 5S Multipipe underfloor heating pipe, dimension 16 x 2 mm, length 600 m	SALE	77111662
77111665	TECEfloor SLQ PE-RT 5S BMB surface heating pipe, dim. 16 x 2.0, 600 m	NEW	
77111730	TECEfloor SLQ 5S Multipipe underfloor heating pipe, dimension 17 x 2 mm, length 300 m	SALE	77111732
77111732	TECEfloor Soft-PERT 5S underfloor heating pipe, dim. 17 x 2.0, 300 m	NEW	
77111756	TECEfloor SLQ 5S Multipipe underfloor heating pipe, dimension 17 x 2 mm, length 560 m	SALE	77111758
77111758	TECEfloor Soft-PERT 5S underfloor heating pipe, dim. 17 x 2.0, 560 m	NEW	
77112030	TECEfloor SLQ 5S Multipipe underfloor heating pipe, dimension 20 x 2.25 mm, length 300 m	SALE	77112032
77112032	TECEfloor Soft-PERT 5S underfloor heating pipe, dim. 20 x 2.25, 300 m	NEW	
77112060	TECEfloor SLQ 5S Multipipe underfloor heating pipe, dimension 20 x 2.25 mm, length 600 m	SALE	77112062
77112062	TECEfloor Soft-PERT 5S underfloor heating pipe, dim. 20 x 2.25, 600 m	NEW	
77112540	TECEfloor SLQ 5S Multipipe underfloor heating pipe, dimension 25 x 2.5 mm, length 400 m	SALE	77112542
77112542	TECEfloor Soft-PERT 5S underfloor heating pipe, dim. 25 x 2.5, 400 m	NEW	
77220012	TECEfloor SLQ coupling with pressure sleeve for all-plastic pipes, dim. 12	NEW	
77230017	TECEfloor 16-16 plug coupling TECElogo-Push model	Dropped	8710516
77311102	TECEfloor stainless steel manifold HCM 2, model TECElogo-Push SLQ, with FRI, 1" flat sealing FT	SALE	77311302
77311103	TECEfloor stainless steel manifold HCM 3, model TECElogo-Push SLQ, with FRI, 1" flat sealing FT	SALE	77311303
77311104	TECEfloor stainless steel manifold HCM 4, model TECElogo-Push SLQ, with FRI, 1" flat sealing FT	SALE	77311304
77311105	TECEfloor stainless steel manifold HCM 5, model TECElogo-Push SLQ, with FRI, 1" flat sealing FT	SALE	77311305
77311106	TECEfloor stainless steel manifold HCM 6, model TECElogo-Push SLQ, with FRI, 1" flat sealing FT	SALE	77311306
77311107	TECEfloor stainless steel manifold HCM 7, model TECElogo-Push SLQ, with FRI, 1" flat sealing FT	SALE	77311307
77311108	TECEfloor stainless steel manifold HCM 8, model TECElogo-Push SLQ, with FRI, 1" flat sealing FT	SALE	77311308
77311109	TECEfloor stainless steel manifold HCM 9, model TECElogo-Push SLQ, with FRI, 1" flat sealing FT	SALE	77311309
77311110	TECEfloor stainless steel manifold HCM 10, model TECElogo-Push SLQ, with FRI, 1" flat sealing FT	SALE	77311310
77311111	TECEfloor stainless steel manifold HCM 11, model TECElogo-Push SLQ, with FRI, 1" flat sealing FT	SALE	77311311
77311112	TECEfloor stainless steel manifold HCM 12, model TECElogo-Push SLQ, with FRI, 1" flat sealing FT	SALE	77311312
77311302	TECEfloor comfort heating circuit manifold with flow rate indicator, type TECElogo-Push, 2 heating circuits	NEW	
77311303	TECEfloor comfort heating circuit manifold with flow rate indicator, type TECElogo-Push, 3 heating circuits	NEW	
77311304	TECEfloor comfort heating circuit manifold with flow rate indicator, type TECElogo-Push, 4 heating circuits	NEW	
77311305	TECEfloor comfort heating circuit manifold with flow rate indicator, type TECElogo-Push, 5 heating circuits	NEW	
77311306	TECEfloor comfort heating circuit manifold with flow rate indicator, type TECElogo-Push, 6 heating circuits	NEW	

Item No.	Designation	State/Change	Substitute
77311307	TECEfloor comfort heating circuit manifold with flow rate indicator, type TECElogo-Push, 7 heating circuits	NEW	
77311308	TECEfloor comfort heating circuit manifold with flow rate indicator, type TECElogo-Push, 8 heating circuits	NEW	
77311309	TECEfloor comfort heating circuit manifold with flow rate indicator, type TECElogo-Push, 9 heating circuits	NEW	
77311310	TECEfloor comfort heating circuit manifold with flow rate indicator, type TECElogo-Push, 10 heating circuits	NEW	
77311311	TECEfloor comfort heating circuit manifold with flow rate indicator, type TECElogo-Push, 11 heating circuits	NEW	
77311312	TECEfloor comfort heating circuit manifold with flow rate indicator, type TECElogo-Push, 12 heating circuits	NEW	
77311320	TECEfloor thermometer set for comfort heating circuit manifold, 0-60 °C	NEW	
77311321	TECEfloor quick-action air vent set G 3/8" for comfort heating circuit manifold	NEW	
77390010	TECEfloor plastic HCM base module holder, KFE, 1" flat sealing FT	SALE	
77390020	TECEfloor plastic HCM 2 connection module with flow rate indicator, can be coupled, seals O-ring	SALE	
77390030	TECEfloor plastic HCM 3 connection module with flow rate indicator, can be coupled, seals O-ring	SALE	
77390040	TECEfloor plastic HCM 4 connection module with flow rate indicator, can be coupled, seals O-ring	SALE	
77390113	TECEfloor industry plastic heating circuit manifold flow/return module	Dropped	
77460007	TECEfloor compact mixer regulator 230 V	Dropped	
77520009	TECEfloor dry-wall panel TP 30/16 BMB	NEW	
77531530	TECEfloor tacking sheet 10plus (1.92 m ²) fold. sheet 160 x 120 x 1 cm R=0.285 m ² K/W	Dropped	77531533
77990101	TECEfloor screed panel for Comfort flush-mounted cabinet, width 400 mm	NEW	
77990102	TECEfloor screed panel for Comfort flush-mounted cabinet, width 540 mm	NEW	
77990103	TECEfloor screed panel for Comfort flush-mounted cabinet, width 690 mm	NEW	
77990104	TECEfloor screed panel for Comfort flush-mounted cabinet, width 840 mm	NEW	
77990105	TECEfloor screed panel for Comfort flush-mounted cabinet, width 990 mm	NEW	
77990106	TECEfloor screed panel for Comfort flush-mounted cabinet, width 1140 mm	NEW	

Notes:

- Goods are supplied to the specialist wholesale trade only in the quantities specified.
- Subject to technical modifications.
- This documentation is based on our current state of knowledge; the “state of the art” applies as a matter of course.
- Local standards and guidelines are to be taken into consideration in the choice of materials.

Valid until the appearance of the next issue. Subject to alterations and errors excepted.

More information on
www.tece.com

TECE GmbH
P +49 2572 928-999
international-business@tece.de
www.tece.com