


TECEfloor Shuntgrupp 10 kW - RSK 243 45 34

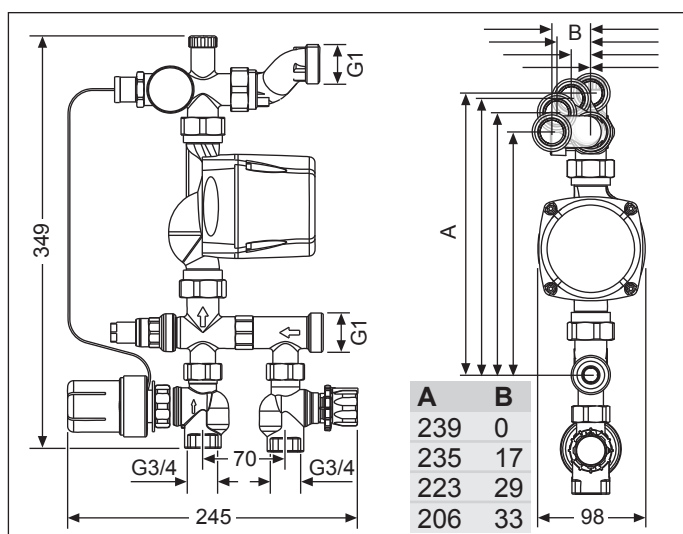

Temperatur



Primär	20-90° C
Sekundär	20-55° C
p max.	6 bar

Pump

U	230 V, 50 Hz
Q	3,5 m³/h
H	6 mWs
P	3 ... 42 W
Glykol	max. 30 vol%

Ventil


Returventil	kvs 2,7 m³/h
Termostatventil	kvs 4,0 m³/h

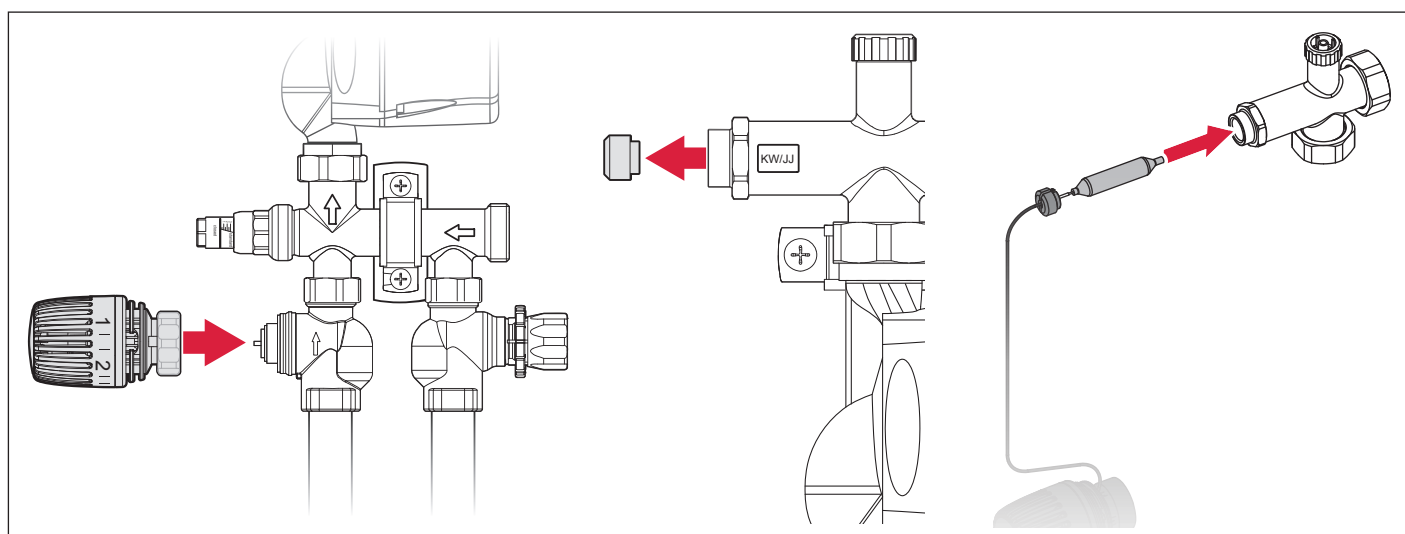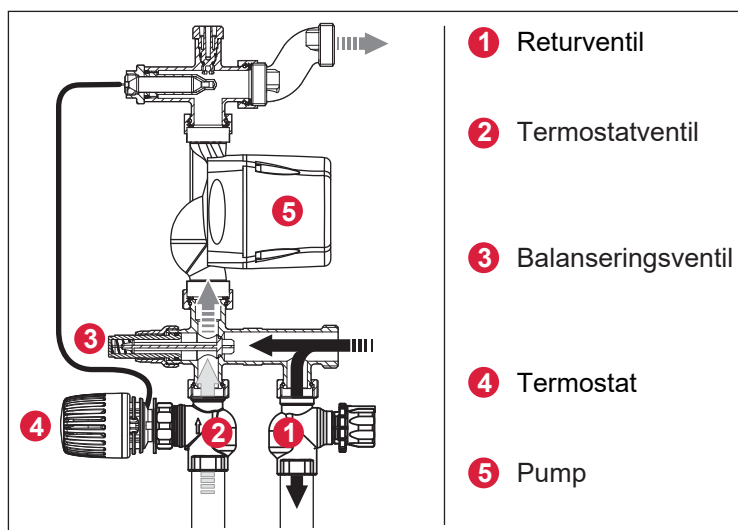



TECEfloor Shuntgrupp 10 kW - RSK 243 45 34

Termostat

1	20° C
2	25° C
3	30° C
4	34° C
5	38° C
6	42° C
7	46° C
8	50° C
9	55° C

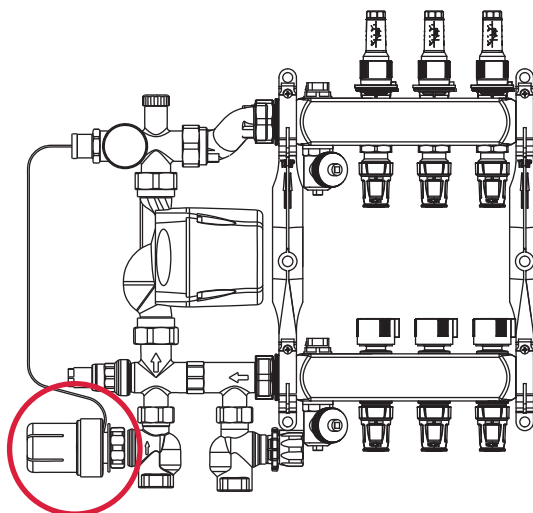


Påfyllning

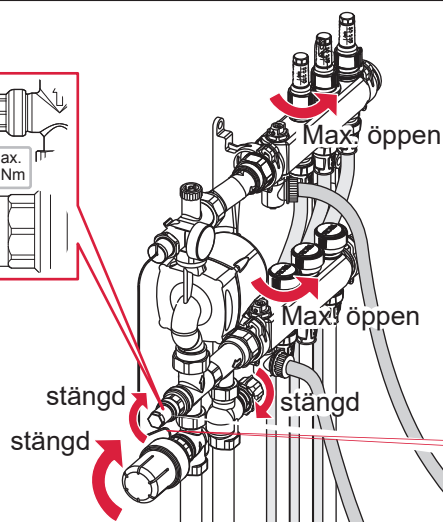




Öppna ventil
efter renspolning

Avluftning

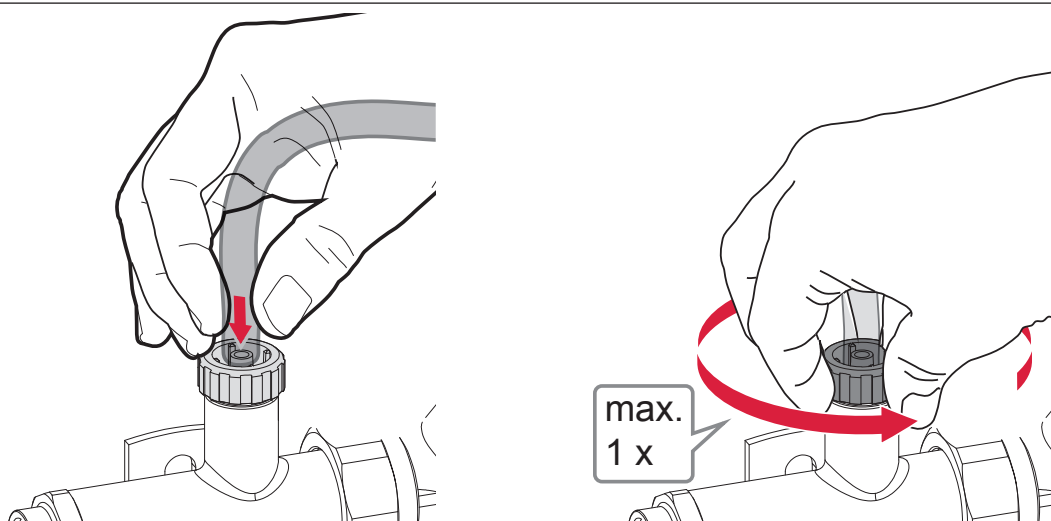


TECEfloor Shuntgrupp 10 kW - RSK 243 45 34



Pump

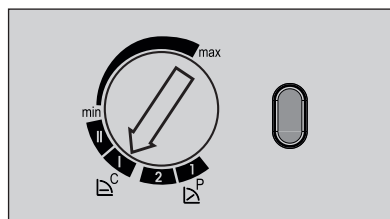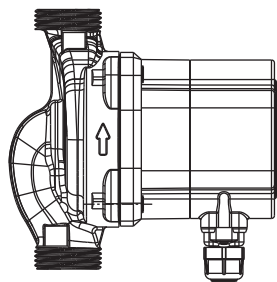

Program	LED
P1/P2 = Δp variabel	grön
C1/C2 = Δp konstant	orange
Min-Max	blå
Error	röd
Luft kontroll	vit (blinkande)

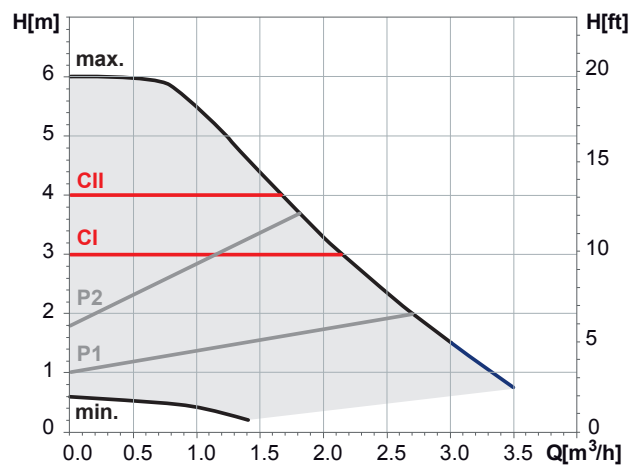

Returventil

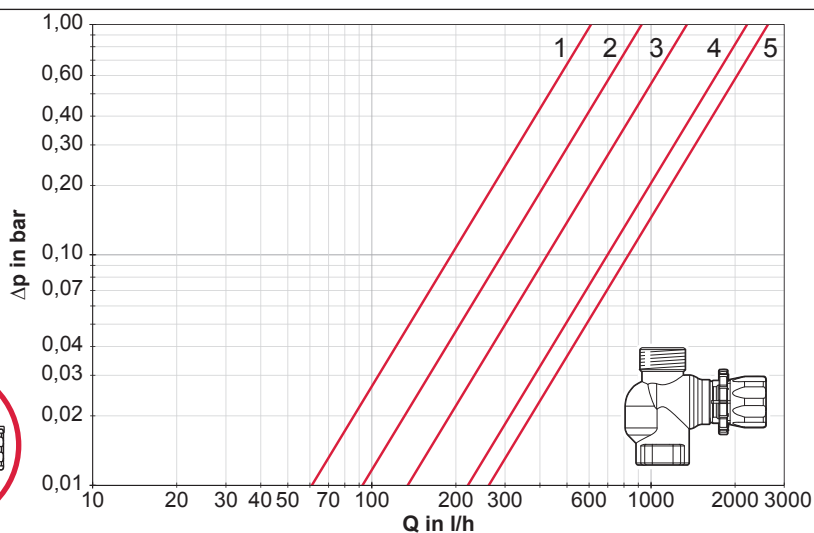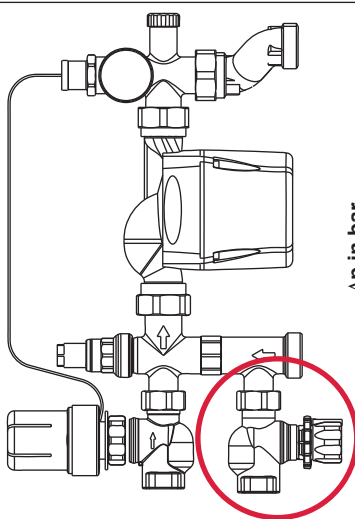

Balanseringsventil

