

TECEprofil H750 WC Cistern Frame

Article Number: 9300291

Description:

Toilet module including "easy fit" flush control assembly. For fitting in front of solid walls or within metal or wooden stud-and-beam walls and/or corner module.

Applications:

TECEprofil 750mm height load bearing installation cistern frame suitable for fixing wall hung WC's in en-suites, cloakrooms and other bathroom projects where WC pans are required to be off the floor. Suitable for:

- All common construction systems, in domestic, commercial, industrial & institutional new build or refurbishment projects.
- Small or large bathrooms, where space is at a premium, while ease of cleaning & sleek design is a priority.
- Rapid, secure fitting of wall hung WCs from major brands with universal fixing positions of 180mm centres.
- Fixing within drywall / studwork frames, in front of solid walls and in corners, and suits all common floor structures.
- Wall boards, tightly fixed to the frame, conceal the frame, cistern & all pipework, and are ready to finish.
- Can be used with 'grey' rainwater recycling systems when adequately filtered.

Product characteristics & key features:

Uni 750-cistern for top actuation:

- Safety tank made of impact-resistant plastic, tested according to EN 14055.
- Cistern fully pre-assembled and sealed.
- Cistern connection with external thread R 1/2" on the side, compatible with quick adaptors.
- 8-litre tank volume; 6-litre pre-set standard flush volume, 4.5-litre flush volume can be set at any time; 3-litre partial flush volume for dual-flush system; immediate cleaning for dual-flush system; The water left in the cistern after a flush can be used right away for a quick cleaning flush. Insulated against condensation water.
- For TECE flush plates and toilet flush handle.
- Can be used as a single-flush or dual-flush cistern.
- "Easy fit" flush plate mounting.
- Installation tunnel for service opening, can be shortened without the need for tools.
- Low-noise hydraulic filling valve, acoustic group 1 according to DIN 4109.


Module frame:

- Self-supporting, powder coated.
- Two M12 retaining bolts and nuts.
- Toilet drain bend DN90 with joint adapter DN90/100, made of PP.
- Joint adapter also suitable for horizontal installation.
- Toilet connection set DN90 to BS 4" adapter (offset).
- WC connection box including bare-wall protection with junction box.

TECE Ltd. data sheet

Status as of 09/10/2025

Technical Data:

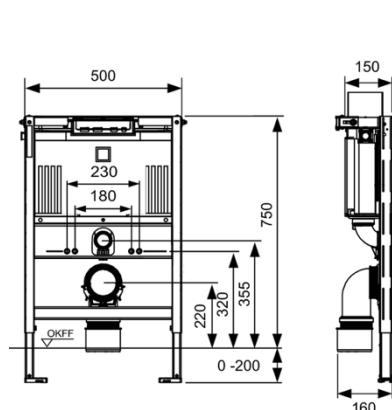

* Only for WC pans designed for low volume flushing.
Contact Sales Office for latest specifications & Information

SIZE, Height	750mm (+0 > 200mm)
SIZE, Width x Depth:	500mm x 150mm max (front of frame). 150mm option for straight soil connection 160mm if using 90-degree soil connection elbow
SIZE, Flush Plate Cut Out:	188mm x 111mm, finished depth thickness 20mm > 90mm 75 dia x 95 mm deep for flushpoint
MATERIAL, Frame:	40mm deep steel extrusions, powder coated RED with various fixing positions down either side for installation into stud walls
MATERIAL, Isolation & Control Valve:	Brass, ½" male threaded water inlet connection.
MATERIAL, Cisterns:	Rotationally moulded polymer, single piece fixed flush pipe.
CAPACITY, Tank:	8 litre tank capacity.
CAPACITY, Flushing:	Ex. Factory : 6.0~3.0 litres, eco adjustable : 4.5~3 litres (or less*).
INLET FLOW PRESSURE:	0.5 Bar minimum ~ 10.0 Bar Maximum
FLUSH CONTROLS:	ALL MECHANICAL CONTROL PLATES suit ALL MODELS (separate order, see Datasheet)
TESTING & APPROVAL:	DIN EN 14055. WELL label – class 'A' water efficiency.

Specification clause:

TECEprofil H750 WC installation frame in RED powder coat, with 8 litre polymer cistern tank, and ½" 'quick connect' water connection, for wall hung pans and compatible with ALL TECE flush controls including pneumatics, fitted to top of tank, factory sealed with quick release see-through splash guard and C/W all fittings and instructions.

Contents:

Supplied in Single BOX (N.B. order control plates separately).

- TECE self-supporting, load bearing installation frame, with concealed cistern, & adjustable feet.
- Fill & flush valves, angle stop valve, transparent access cover.
- Flush and soil pipe plugs with pan mounting rods, flush and soil pipe straight connectors, soil connection elbow, & 90/110 DN90 to BS 4" waste pipe adaptor.
- Tool free adjustable maintenance tunnel with zip technology.

Optional extras:

- Full range of control plates in 100's of design & finish combinations.
- Corner wall brackets.
- Insert chute for cleaning tablet.

Packaging:

- Single Items, heavy duty box: Size: 770mm x 520mm x 170mm.
- Disposal: According to local bylaws.
- Single frames double wrapped, quality assured, for peace of mind on quality and included parts. Not for palletted frames.

Installation Instructions:

- QR codes with videos or written instructions for installation support and advice included in box.

E&OE

We reserve the right to alter & amend specifications without prior notice. This is not a specification document & does not guarantee performance.

SPARES AND REPAIRS

We guarantee that spare parts will be available for all cisterns and frames for at least 25 years.