



TECEprofil toilet module with Uni cistern, with integrated cold water hygiene flushing function, installation height 1120 mm

Article number: 9300105

DU 1: 1 pc.

DU 2: 10 pc.

DU 3: 20 pc.



Description:

Toilet module including "easy fit" flush plate assembly. For fixing to TECEprofil section tubes or for installation in metal or wooden stud walls and as a pre-wall or corner module; also suitable for single block assembly.

Uni cistern for operation from the front:

- Cistern with integrated cold water hygienic flush
- Completely pre-installed flushing unit with hygienic flushing function
- Multi-way shut-off valve with function for flushing the pipe before commissioning
- Cistern connection with outer thread R 1/2" at the top, for flushing the cold water pipe, compatible with quick-action adapters
- Safety tank made of impact-resistant plastic, tested to EN 14055
- Cistern completely pre-assembled and sealed
- 10 litre tank volume; 6 litre pre-set standard flush volume, 4.5/7.5/9 litre flush volume can be set at any time; 3 litre partial flush volume for dual-flush system; optional setting of a 4/2 litre flush volume possible; remaining volume can be used for immediate cleaning flush.
- Insulated against condensation water
- Suitable for TECE flush plates and toilet flush handles
- Can be used as a single or dual-flush cistern
- "easy fit" flush plate installation
- Installation tunnel for service opening, can be shortened without tools
- Low-noise hydraulic filling valve, acoustic group 1 in accordance with DIN 4109
- Mains connection with transformer including connection cable
- Fill level sensor, protects against backflow in the cistern
- Flow control throttle without removing the drain valve

Operation:

- Locally via Bluetooth interface via TECE Smartconnect app
- Centralised and location-independent via Ethernet or Wi-Fi interface via TECE Smartconnect web application, optionally via BMS interface
- Setting the flush intervals or flush days in combination with the flush volume
- Setting temperatures for temperature-controlled flushing
- Flush history logging

Module frame:

- Self-supporting, powder-coated
- Two M 12 retaining bolts and nuts
- Toilet drainage bend DN 90 with joint adapter DN 90/100 made of PP
- joint adapter also suitable for horizontal installation
- Toilet connection set DN 90
- Toilet connection box including rough-in protection, with junction box and cover for transformer

A raised ceramic attachment for a sitting height of 48 cm can be added in keeping with German standard DIN 18040 (DIN 18040: Barrier-free construction - Part 1: Publicly accessible buildings and workplaces).

Please order separately:


- TECE Gateway (item no. 9810013)
- Toilet flush plate (see flush plates)
- Fitting for pre-wall, corner or wooden stud structures
- Power cable for building management system (optional)
- TECE dry-wall construction upgrade set for TECE shower toilets (optional)

Caution:


- **Not compatible with TECE insert chute for cleaning tablets.**

Sales data:

Product name:	TECEprofil toilet module with Uni cistern, with integrated cold water hygiene flushing function, installation height 1120 mm
Commodity group:	908
Product group:	2009080010

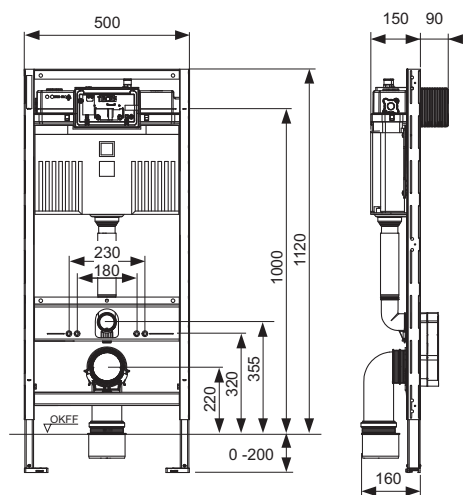

Spare parts:

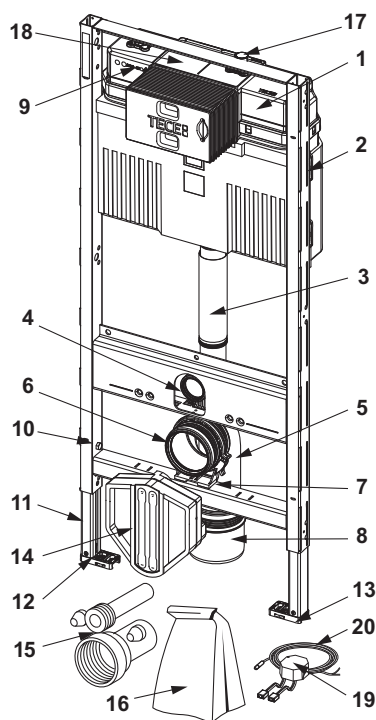

1	9820103	Uni cistern 1120 mm
2	9820040	Assembly kit for Uni cistern
3	9820011	Flush pipe with O-ring, length 269 mm, dry-wall construction
4	9820015	Flush pipe seal
5	9820134	Toilet drain bend DN 90 (PP)
6	9820139	Seal for drain bend DN 90
7	9820348	Toilet drain bend holder complete, mounting on cross-beam at bottom (from 04/2017)
8	9820136	Toilet connector, DN 90/100, PP
9	9820619	Hygienic flush unit IoT cold water
10	9820447	Foot brake with steel spring
11	9820335	C-section for module foot
12	9820332	Module foot with toggle left
13	9820333	Module foot with toggle right
14	9820568	WC connection box
15	9820057	Toilet connection set, DN 90
16	9820043	By-pack for toilet module
17	9820443	Shut-off valve 4-way
18	9820573	Connecting pipe for hygiene flush unit
19	9810010	Transformer including connection cable
20	9820352	Connection cable (5 meters)