



TECE ElitePro Linear Floor Drain

Description:

A unique premium specification stainless steel shower drain designed for all floor types, including UK style 'WOOD over JOIST' and concrete floors. Features include an off-set outlet with UK compliant trap (50mm water seal), factory fitted waterproofing membrane, height adjustable frame & revisable grate to suit different depths of solid floor finish. A flexible & easy to install high quality shower drain, TECE ELITEpro suits all residential shower installations. **E&OE**

Applications:

TECE ELITEpro shower channels are wide collection vessels used within wet room showers and are offered in various lengths. Suits:

- En-Suites – small bathrooms where space efficiency is at a premium
- High End Designer Bathrooms – Large sizes add to the feeling of space within a shower area
- Refurbishments & New Build – universal drain can be used in all construction styles or contract types
- Floor Substrates – Designed especially for UK wooden board over joist floors (18mm +) & also concrete floors without alteration

Product characteristics & key features:

- Suits refurbishment & new build projects, universal shower drain for all common floor substrates including wood over timber joist and concrete screed. (Accessory required for Concrete installation)
- High quality polished grade 304 stainless steel chassis with V shaped gradient stamped into trough directs water to waste outlet and improves performance.
- Outlet offset by 100mm from the centre, accommodates varying site conditions with joists locations & directions
- With unique dual seal foul air trap system with UK regulatory 50mm water seal (primary) & physical vapour barrier (secondary)
- Supplied as standard with UK style DN50 > 2" adaptor, & 'trap noggin block' to securely fix the trap body at point of installation.
- ABS DN50 > 2" adaptor comes with a mechanical connection at one end and allows for a solvent weld on the other acting as a bridging piece between Polypropylene trap, and UK pipework.
- Optional traps offer vertical outlets, lower build in heights, or ultra-high flow rates. All trap options are rotatable through 360°
- Structural flange on all 4 sides of the chassis allows for the suspension of the drain into timber floors and has been tested to withstand 150kg of load weight making the drain DDA compliant.
- Standard waterproof sealing membrane is factory fitted to the chassis flange, to stop leaks by sealing the drain chassis to the floor substrate and allows for easier installation of other waterproofing materials into the shower area.
- Variable height adjustable stainless-steel frame ensures a foot friendly finish at the channel edge & allows tile floor finishes with a thickness of between 10mm & 20mm to be used.
- Removable stainless steel tile insert is reversible, offering a brushed finish cover or a recess to insert floor tiles

Specification clause:


TECE ELITEpro linear shower channel drain in polished 304 Stainless Steel with supporting installation flange, waterproofing membrane, high flow, rotatable (360°) trap, height adjustable frame & matching removable / reversible tile insert grate for tile thickness of 10mm > 20mm.

TECE Ltd. data sheet

Status as of 29/04/2026

Technical Data:

Size Channel, Standard	500, 600, 700, 800, 900, 1000, 1100, 1200, 1300, 1400, 1500, 1600, 1700, 1800, 1900, 2000mm
Visible Size (Length)	Nominal Length less 38mm – E.g. ELITEpro 800mm would have 762mm grate visible
Visible Size (Width)	Visible grate / frame width – 74mm
Cross Sectional Profile	Channel min. 19mm Cross Section, to a max of 22mm
Waste & Trap	Trap has UK compliant 50mm Water Seal (options incl. 30mm & 35mm). See options
Suitable Floor Covering	Natural Stone or Tile up to 20mm thick.
Installation Sealing Kit	INCLUDED - Waterproof Sealing membrane factory fitted in UK to surrounding flange.
Gradient	Optional – Matching AquaeGUARD Waterproof Membranes ~ See Data Sheets A floor gradient of 1-2% must be built into the surrounding floors
MATERIAL: Drain Chassis	Chassis - 1.5 m/m 304 Stainless Steel
MATERIAL: Frame & Grate	Frame - 3.0 m/m 304 Stainless Steel, Grate – 1.5 m/m 304 Brushed Stainless Steel
MATERIAL: Trap	Polypropylene
MATERIAL: DN50 to BS2" Adaptor	ABS
CAPACITY: Waste and Trap - Standard	50mm Water Seal, Horizontal Outlet (38 > 42 Ltrs/Min) location dependant

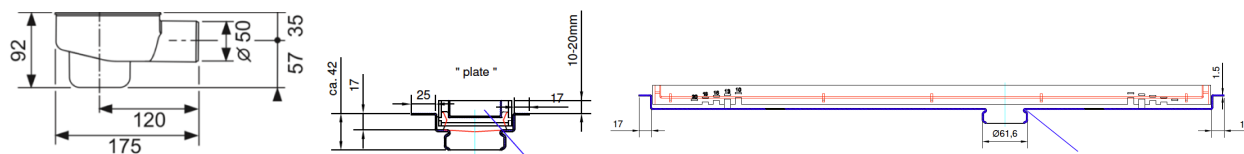

Article Numbers

TECE ELITEpro Shower Channel, Fitted Membrane, Tile Grate & Trap	00800280
TECE ELITEpro Shower Channel, Fitted Membrane, Tile Grate & Trap	00800281
TECE ELITEpro Shower Channel, Fitted Membrane, Tile Grate & Trap	00800282
TECE ELITEpro Shower Channel, Fitted Membrane, Tile Grate & Trap	00800283
TECE ELITEpro Shower Channel, Fitted Membrane, Tile Grate & Trap	00800284
TECE ELITEpro Shower Channel, Fitted Membrane, Tile Grate & Trap	00800285
TECE ELITEpro Shower Channel, Fitted Membrane, Tile Grate & Trap	00800286
TECE ELITEpro Shower Channel, Fitted Membrane, Tile Grate & Trap	00800287
TECE ELITEpro Shower Channel, Fitted Membrane, Tile Grate & Trap	00800288
TECE ELITEpro Shower Channel, Fitted Membrane, Tile Grate & Trap	00800289
TECE ELITEpro Shower Channel, Fitted Membrane, Tile Grate & Trap	00800290
TECE ELITEpro Shower Channel, Fitted Membrane, Tile Grate & Trap	00800291
TECE ELITEpro Shower Channel, Fitted Membrane, Tile Grate & Trap	00800292
TECE ELITEpro Shower Channel, Fitted Membrane, Tile Grate & Trap	00800293
TECE ELITEpro Shower Channel, Fitted Membrane, Tile Grate & Trap	00800294
TECE ELITEpro Shower Channel, Fitted Membrane, Tile Grate & Trap	00800295

Contents:

- Stainless steel chassis with off-centre outlet, complete with waterproofing membrane (factory fitted in UK)
- Secondary foul air trap – push-fit syphon tube, to create a secondary foul air seal
- Stainless steel height-adjustable support frame and matching feet
- Stainless steel reversible grate to suit support frame
- Installation instructions

Packaging:

- Supplied in a single box (Note: Order WC cisterns and WC cistern frames separately)
- Heavy-duty box: size dependant on product
- Factory-sealed and ready to install
- Disposal should follow local bylaws

Installation Instructions:

- See Separate Sheet : Included in package

Optional Extras:

- Waste & Trap 35mm Seal : Horizontal (31 > 37 Ltrs/Min)
- Waste & Trap 30mm Seal : Horizontal (28 > 33 Ltrs/Min)
- Waste & Trap 50mm Seal : Vertical (60 > 72 Ltrs/Min)

E&OE

We reserve the right to alter and amend specifications without prior notice. This is not a specification document and does not guarantee performance.