



TECEneo Shower WC – Cold Feed

Article Number: 9700207

Description:

Water-saving, rimless toilet ceramic with integrated shower function for comfortable personal cleaning using water. Shower function without electricity via mains fed cold-water connection, wall hung ceramic for in-wall cistern frame, simple installation or retrofitting.

Applications:

TECEneo wall hung shower WC pans are designed to fit onto WC frames, fitted into en-suites, cloakrooms and other bathroom projects where wall hung shower WC pans are required. Suitable for:

- Small and large bathrooms, where space is at a premium, while ease of cleaning and sleek design is a priority.
- All major manufacturers WC frames with 180mm pan fixing centres.
- Installations where cold-water feeds are available, but not electric supply.
- Premium design-led bathroom installations, where aesthetic considerations require sleek product solutions.
- Can be fitted for comfort height installations providing the frame can be adjusted to suit to finish.
- Can be used with 'grey' rainwater recycling systems when adequately filtered.

Product characteristics and key features:


- Intuitive operation via side rotary knobs for water temperature and water volume.
- Shower jet continuously adjustable up to 5.6 litres/min.
- Replaceable shower arm caps.
- Approval according to EN 1717.
- Minimum flow pressure 1.5 bar (max. 10 bar).
- Function via water pressure - no electrical connection required.
- Wall-hung washdown toilet for 4.5 and 6 litre flush volumes.
- Cyclone flush technology (thorough and quiet flushing).
- Cera clean technology (special surface coating for easy cleaning).
- Compact design - projection 540 mm, width 367 mm.
- Concealed wall attachment and concealed water connections.
- Rimless ceramic with integrated splash guard.
- Pre-fix technology: factory-moulded toilet seat attachment for a wobble-free seat and lid (compatible with all TECE shower toilet seats).
- Material: White ceramic.
- Hygiene-optimised ceramic design.
- EN 997 Certified.

TECE Ltd. data sheet

Status as of 16/06/2025

Technical Data:

SIZE, Height x Width x Depth: 365 x 367 x 540
PRESSURE, Minimum Shower Feed: 1.5 bar (Max. 10 bar)
PRESSURE, Rotary Control: Increase or decrease water pressure on shower nozzle using rotary control up to 5.6 lpm

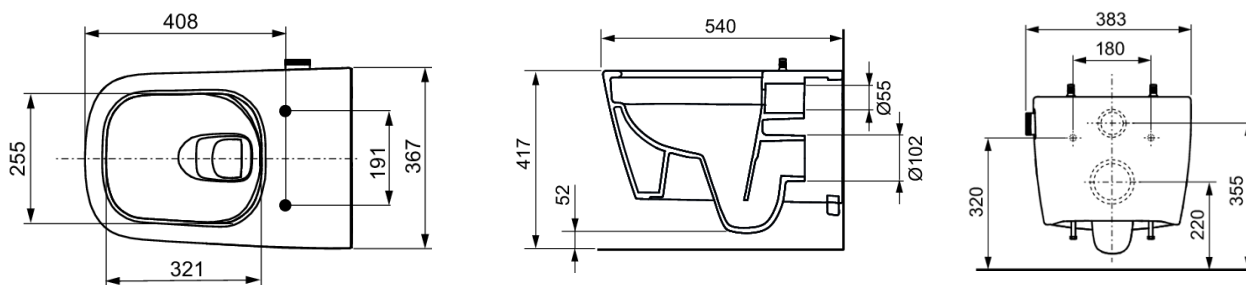

Specification clause:

TECEneo rimless ceramic wall-hung shower WC pan is compatible with all major WC frames and certified to EN997 standards. It features a hygienic ceramic design for 4.5 to 6-litre flush volumes and water pressure up to 5.6 lpm via rotary control. With pre-assembled seat fastenings, it is easy to install and suitable with **all** major manufacturers WC frames with 180mm pan fixing centres. Minimum water pressure is 1.5 bar, maximum 10 bar. Also featuring a Type AD backflow prevention device and self-cleaning nozzle.

Contents:

Supplied in Single BOX (N.B. order control plates separately)

- TECEneo rimless wall hung WC pan.
- Pre-assembled fastening locations for toilet seat.
- Water pressure controls pre-fitted.
- Self-cleaning shower nozzle installation tool.
- Installation guides.
- Cleaning Box.
- Device for descaling unit.
- Sound insulation.

Please order separately:

- TECE toilet seat with CLASSIC lid (Item No. 9700600).
- TECE toilet seat with SLIM lid (Item No. 9700603).
- Shower Toilet/Seat Connection Set (Refer to Product List).


Packaging:

- Single items, Heavy Duty Box: Size (W x H x D): 430 x 460 x 590mm.
- Disposal: According to local Bylaws.
- Ready to install, factory sealed.

Installation Instructions:

- See separate sheet: Included in package.

Spare Parts:

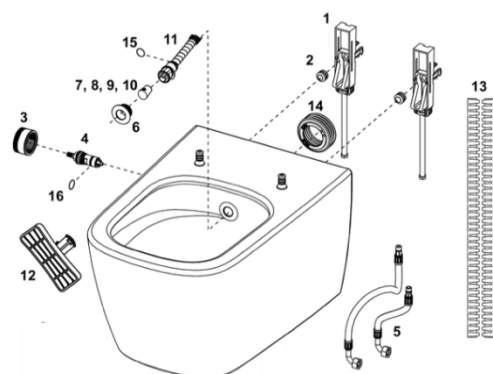

No.	Article No.
1	9820356
2	9820357
3	9820362
4	9820469
5	9820471 (from 2021)
6	9820364
7	9820403
8	9820404
9	9820405
10	9820406
11	9820363
12	9820422
13	9820351
14	9820484
15	9820585
16	9820586

Spare Parts

Concealed mounting
Knurled nut (2x) for concealed mounting
Control knob for water volume, plastic white
Ceramic cartridge including EN 1717 safeguard
Reinforced hoses
Rosette, white
Shower nozzle cap (3 x) "standard" 75', white
Shower nozzle cap (3x) "standard" 90' white
Shower nozzle cap (3x) "medium" 90' White
Shower nozzle cap (3x) "small" 90' White
TECE shower arm complete set, white,
Removal tool shower arm
Sound insulation tape
Seal for flush pipe connection
O-ring for shower arm spring retainer
O-ring for safety device EN 1717

E&OE

We reserve the right to alter and amend specifications without prior notice. This is not a specification document and does not guarantee performance.

SPARES AND REPAIRS

We guarantee that spare parts will be available for all cisterns and frames for at least 25 years.